


 安全に関するご注意

- 一般屋内天井埋込専用器具です。下記のような場所及び、一般住宅の断熱施工天井では使用できません。
故障や絶縁不良による火災・感電・短寿命の原因となります。
- ・湿度が20～85%の範囲外、及び水滴など水のかかる場所
 - ・振動、衝撃の多い場所
 - ・粉塵の多い場所
 - ・腐食性ガス、可燃性ガス、オイルミストなどが発生及び塩害の生じる場所
- 断熱材・防音材などを被せた状態で使用しないでください。
断熱施工の天井に使用する場合には、右記の図の条件を守ってください。
誤って施工すると火災および短寿命の原因となります。
- 指定方向以外は取付けしないでください。器具の落下の原因となります。
- 定格電圧の±6%の範囲でご使用ください。
感電・火災および短寿命の原因となります。
- 被照射との距離は、指定以下で使用しないでください。火災の原因になります。
- LEDの光色にはバラツキがある為、発光色、明るさが異なる場合がありますのでご了承ください。
- 通電した状態でコネクタの着脱はしないでください。不点の原因になります。
- コントローラーなどの調光器と組み合わせて使用する際は、必ず弊社にご相談ください。
- 図) 一般住宅以外の断熱施工天井でご使用の場合
-
- The diagram illustrates the required clearances for installing a lighting fixture in a ceiling with insulation and soundproofing. It shows a cross-section of the ceiling with insulation and soundproofing materials. A lighting fixture is shown installed in the ceiling. The distance from the insulation to the fixture is indicated as 10cm or more. The distance from the power source to the fixture is indicated as 15cm or more. The distance from the fixture to the ceiling is indicated as 5cm or more. The power source is labeled '電源装置' and the fixture is labeled '器具'.

図) 一般住宅以外の断熱施工天井でご使用の場合の施工方法

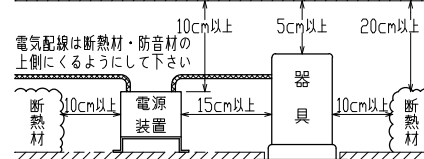


※別売の専用電源装置（定電流形）と組合わせてご使用ください。
※調光型電源装置（位相・PWM・DALI）は、別途お問い合わせください。

◆適合電源装置（別売）

品番	調光方式	出力電流 (If)
S7A8809	非調光	450mA

37×105 $\begin{smallmatrix} +2 \\ -0 \end{smallmatrix}$
埋込穴寸法

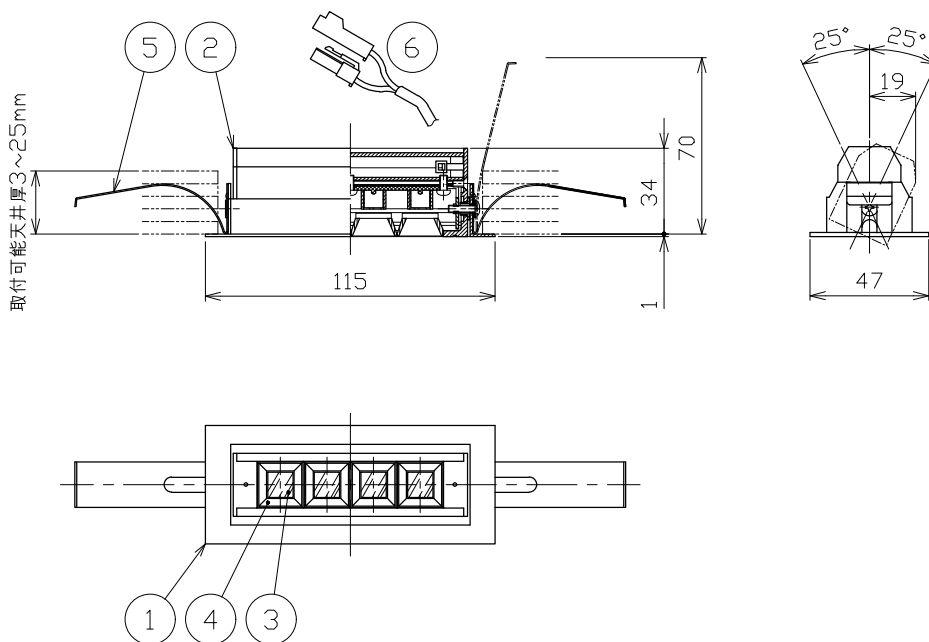

■ 品番（別表）

品 番	器具色
SDL83402L-WN	ホワイト
SDL83402L-WF	
SDL83402L-WW	
SDL83402L-BN	ブラック
SDL83402L-BF	
SDL83402L-BW	

■ 光学特性

配光	1/2ビーム角	器具光束	固有光束・消費効率
N:狭角	16°	336 lm	47.3 lm/W
F:中角	24°	252 lm	35.4 lm/W
W:広角	37°	250 lm	35.2 lm/W

8				特記事項 ・照射物近接限度 0.1m	品番 (別表参照)					
7					SDL83402L-**					
6	コネクター	ナイロン	1組 + 極 / - 極 (各1)							
5	取付バネ	ステンレス	2	電気特性 適合電源装置使用時	電源装置	別置・別売	色温度	3000K		
4	ルーバー	樹脂	1		ブラック	演色性	Ra90			
3	レンズ	樹脂	4		透明	入力電圧	100 V	尺度	器具重量	作図日
2	灯具	アルミ	1		ブラック塗装	入力電流	0.16 A	1/3	0.13 kg	2022.04.25
1	枠	鋼板	1		ホワイト・ブラック塗装	消費電力	7.1 W	承認	検印	作図
No.	部 品 名	材 質	数	備 考	設計寿命	40,000時間	小西	和田	池田	