



配光特性

図番 MOLTO LUCE



カタログ番号	F-294B		
オプション番号	4000K Ra80		
使用ランプ	LED 38W		
ランプ光束	3895.0	lm	1,000
器具効率	100.1 %		
下方効率	100.1 %		
上方効率	0.0 %		
最大取付間隔			
A断面	1.24 H		
C断面			
B断面			

角度	光度
0°	1410
10°	1382
20°	1301
30°	1172
40°	1006
50°	810
60°	590
70°	363
80°	146
90°	1
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

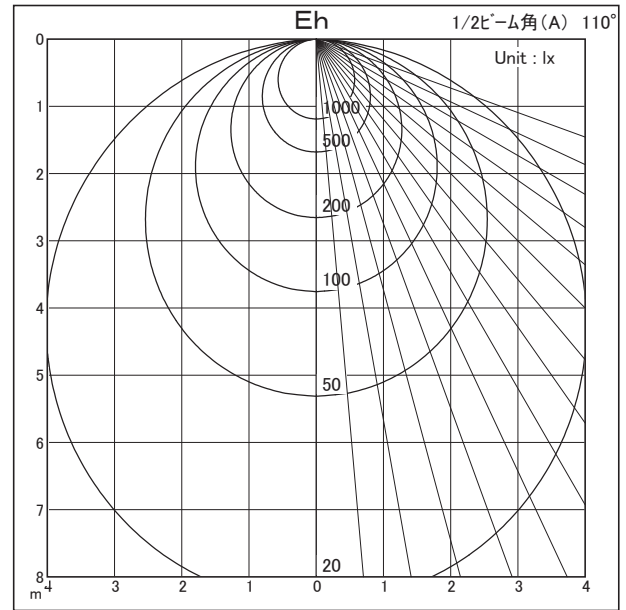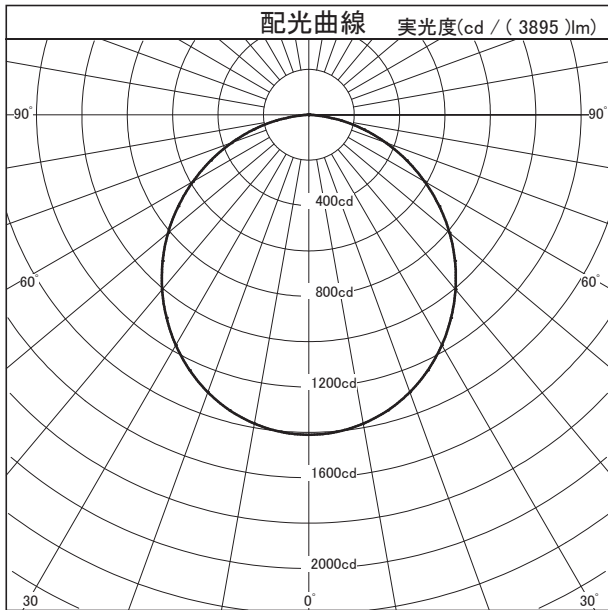

照明率表		平均照度=台数 * 照明率 * 保守率 * 3895 (光束) / (間口 * 奥行)													
床面反射率 (%)		20													
天井面反射率 (%)		80			60			40			20				
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10		
室	0.50	0.39	0.31	0.25	0.38	0.30	0.25	0.37	0.30	0.25	0.36	0.29	0.25	0.23	
	0.70	0.51	0.42	0.36	0.49	0.42	0.36	0.48	0.41	0.36	0.47	0.40	0.35	0.33	
	1.00	0.65	0.56	0.49	0.62	0.55	0.49	0.60	0.54	0.48	0.59	0.53	0.48	0.46	
	1.25	0.73	0.64	0.58	0.70	0.63	0.57	0.68	0.61	0.56	0.65	0.60	0.55	0.53	
	1.50	0.79	0.71	0.64	0.76	0.69	0.63	0.73	0.67	0.62	0.71	0.66	0.61	0.59	
	指	2.00	0.87	0.80	0.74	0.84	0.78	0.72	0.81	0.75	0.71	0.78	0.73	0.70	0.67
		2.50	0.93	0.86	0.81	0.89	0.83	0.79	0.85	0.81	0.77	0.82	0.79	0.75	0.72
		3.00	0.96	0.90	0.86	0.92	0.88	0.83	0.89	0.85	0.81	0.85	0.82	0.79	0.76
		4.00	1.02	0.97	0.93	0.97	0.93	0.90	0.94	0.90	0.87	0.90	0.87	0.85	0.82
	数	5.00	1.05	1.01	0.97	1.00	0.97	0.94	0.96	0.94	0.91	0.93	0.90	0.88	0.85
7.00		1.09	1.06	1.03	1.04	1.01	0.99	1.00	0.98	0.96	0.96	0.94	0.93	0.89	
	10.00	1.12	1.09	1.07	1.07	1.05	1.03	1.02	1.01	0.99	0.98	0.97	0.96	0.92	