




配光特性

図番 MR180323

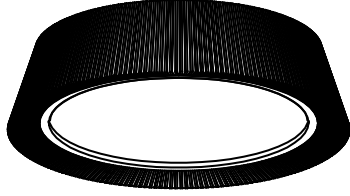

カタログ番号	331L1013G + 320X-223		
使用ランプ	LEDユニット 42.3W		
ランプ光束	3292.0	lm	1,000
器具効率	100.0 %		
下方効率	89.3 %		
上方効率	10.7 %		
最大取付間隔			
A断面	1.13 H		
C断面			
B断面			

角度	光度	
0°	1254	
10°	1215	
20°	1104	
30°	940	
40°	751	
50°	563	
60°	393	
70°	243	
80°	107	
90°	34	
100°	36	
110°	51	
120°	69	
130°	73	
140°	70	
150°	66	
160°	55	
170°	38	
180°	32	

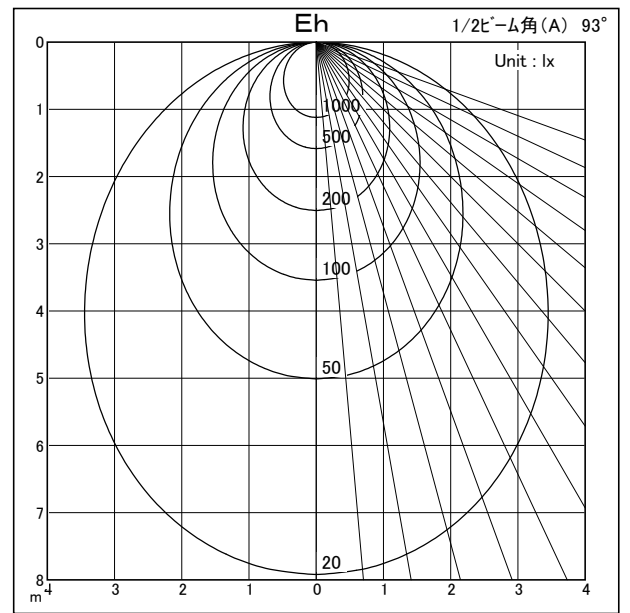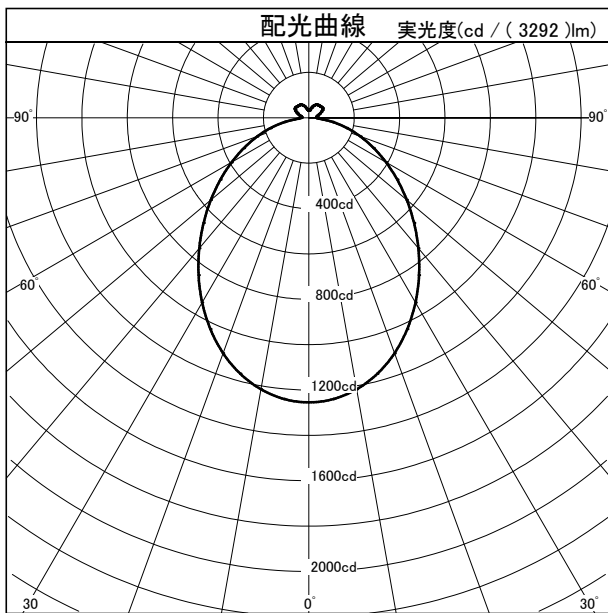

照 明 率 表		平均照度=台数×照明率×保守率×3292(光束)/(間口×奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80												0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室 指 数	0.50	0.39	0.32	0.27	0.38	0.31	0.26	0.36	0.30	0.25	0.34	0.29	0.25	0.23
	0.70	0.52	0.43	0.37	0.49	0.42	0.36	0.47	0.40	0.35	0.44	0.39	0.35	0.32
	1.00	0.65	0.56	0.50	0.61	0.54	0.49	0.58	0.52	0.47	0.55	0.50	0.46	0.43
	1.25	0.72	0.64	0.58	0.68	0.61	0.56	0.65	0.59	0.54	0.61	0.56	0.52	0.49
	1.50	0.78	0.70	0.64	0.74	0.67	0.62	0.69	0.64	0.60	0.66	0.61	0.57	0.54
	2.00	0.86	0.79	0.73	0.81	0.75	0.70	0.76	0.71	0.67	0.72	0.68	0.65	0.61
	2.50	0.91	0.85	0.80	0.86	0.81	0.76	0.81	0.76	0.73	0.76	0.73	0.70	0.66
	3.00	0.95	0.89	0.84	0.89	0.84	0.80	0.84	0.80	0.77	0.79	0.76	0.73	0.69
	4.00	1.00	0.95	0.91	0.93	0.90	0.86	0.88	0.85	0.82	0.83	0.80	0.78	0.73
	5.00	1.03	0.99	0.95	0.96	0.93	0.90	0.90	0.88	0.85	0.85	0.83	0.81	0.76
数	7.00	1.06	1.03	1.00	1.00	0.97	0.95	0.93	0.91	0.90	0.88	0.86	0.85	0.80
	10.00	1.09	1.07	1.05	1.02	1.00	0.99	0.96	0.94	0.93	0.90	0.89	0.88	0.82