



配光特性

図番 190422-02



カタログ番号	320L1031W+320X-223		
使用ランプ	LEDユニット 42.3W		
ランプ光束	3610.0	lm	1,000
器具効率	100.0 %		
下方効率	99.5 %		
上方効率	0.5 %		
最大取付間隔			
A断面	1.28 H		
C断面			
B断面			

角度	光度
	0°
10°	1161
20°	1139
30°	1085
40°	999
50°	873
60°	727
70°	555
80°	377
90°	199
100°	71
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

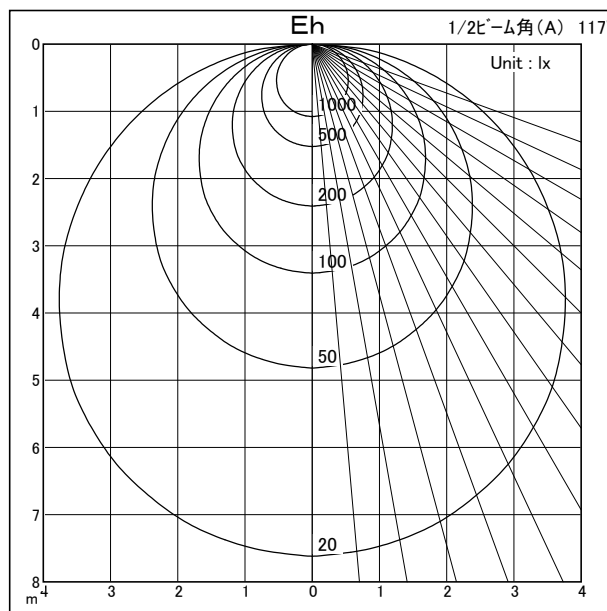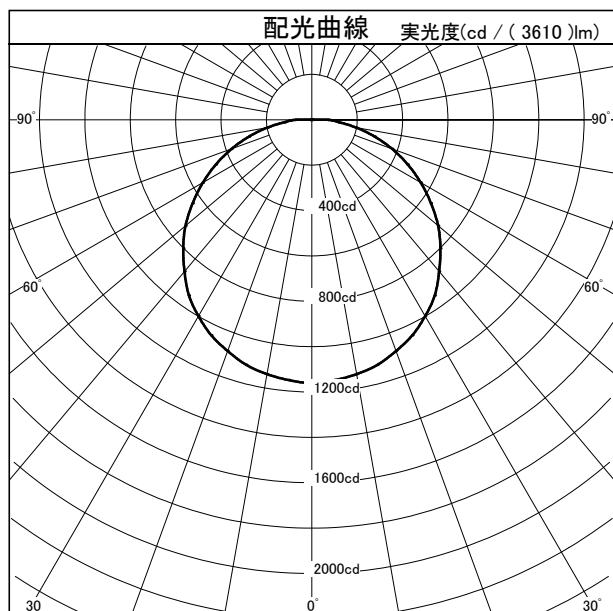

照 明 率 表													
平均照度=台数×照明率×保守率×3610(光束)/(間口×奥行)													
床面反射率(%)		20											
天井面反射率(%)		0											
壁面反射率(%)		0											
室 指 数	0.50	0.37	0.29	0.23	0.36	0.28	0.23	0.35	0.28	0.23	0.34	0.27	0.23
	0.70	0.49	0.40	0.33	0.47	0.39	0.33	0.46	0.38	0.33	0.44	0.38	0.33
	1.00	0.62	0.53	0.46	0.60	0.52	0.46	0.58	0.51	0.45	0.56	0.50	0.45
	1.25	0.70	0.61	0.54	0.67	0.60	0.53	0.65	0.58	0.53	0.62	0.57	0.52
	1.50	0.76	0.67	0.61	0.73	0.66	0.60	0.70	0.64	0.59	0.68	0.62	0.58
	2.00	0.84	0.77	0.70	0.81	0.74	0.69	0.78	0.72	0.67	0.75	0.70	0.66
	2.50	0.90	0.83	0.77	0.86	0.80	0.75	0.83	0.78	0.74	0.79	0.75	0.72
	3.00	0.94	0.88	0.82	0.90	0.85	0.80	0.86	0.82	0.78	0.83	0.79	0.76
	4.00	0.99	0.94	0.90	0.95	0.91	0.87	0.91	0.87	0.84	0.87	0.84	0.82
	5.00	1.03	0.98	0.94	0.98	0.95	0.91	0.94	0.91	0.88	0.90	0.88	0.85
数	7.00	1.07	1.04	1.00	1.02	0.99	0.97	0.98	0.95	0.93	0.94	0.92	0.90
	10.00	1.10	1.08	1.05	1.05	1.03	1.01	1.01	0.99	0.97	0.96	0.95	0.94