



配光特性

図番 BE_23576

カタログ番号	L4274N
使用ランプ	LED 13.5W
ランプ光束	1560.0 lm 1,000
器具効率	0.0 %
下方効率	0.0 %
上方効率	0.0 %
最大取付間隔	
A断面	0.00 H
C断面	
B断面	



CEILING DOWNLIGHT		角度	光度
		0°	1809
		10°	1449
		20°	1073
		30°	706
		40°	423
		50°	56
		60°	40
		70°	35
		80°	23
		90°	8
		100°	5
		110°	4
		120°	2
		130°	2
		140°	1
		150°	1
		160°	1
		170°	1
		180°	0

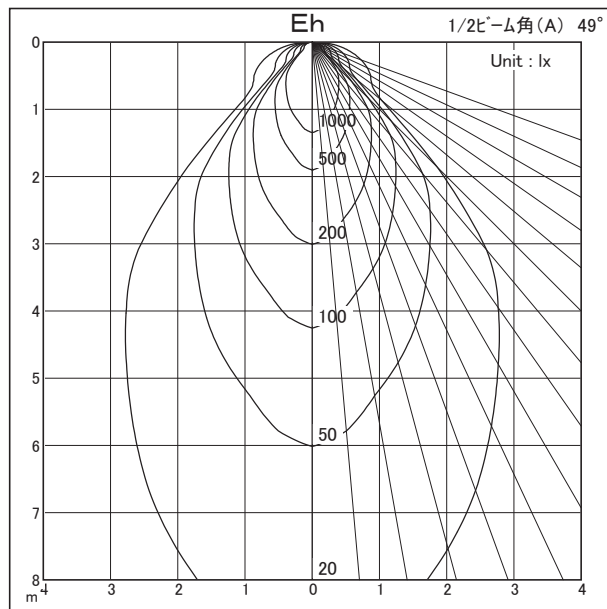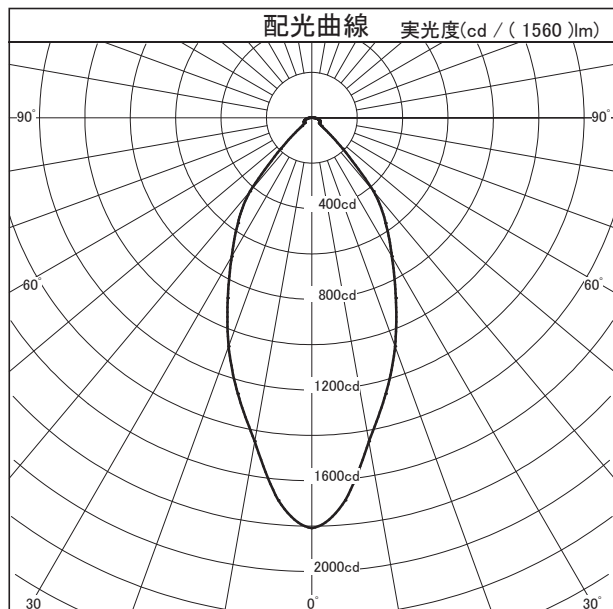

照 明 率 表		平均照度=台数 * 照明率 * 保守率 * 1560 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.58	0.52	0.48	0.57	0.51	0.48	0.56	0.51	0.47	0.55	0.51	0.47	0.46
	0.70	0.71	0.64	0.60	0.69	0.63	0.59	0.68	0.63	0.59	0.67	0.62	0.59	0.57
	1.00	0.82	0.76	0.71	0.80	0.74	0.70	0.78	0.73	0.70	0.76	0.72	0.69	0.67
	1.25	0.88	0.82	0.77	0.85	0.80	0.76	0.83	0.79	0.75	0.81	0.77	0.74	0.72
	1.50	0.92	0.86	0.82	0.89	0.84	0.81	0.87	0.83	0.79	0.84	0.81	0.78	0.76
指	2.00	0.98	0.93	0.89	0.94	0.90	0.87	0.91	0.88	0.85	0.89	0.86	0.83	0.81
	2.50	1.01	0.97	0.93	0.98	0.94	0.91	0.94	0.91	0.89	0.91	0.89	0.87	0.84
	3.00	1.04	1.00	0.96	1.00	0.96	0.94	0.96	0.93	0.91	0.93	0.91	0.89	0.86
	4.00	1.07	1.04	1.01	1.03	1.00	0.98	0.99	0.97	0.95	0.95	0.94	0.92	0.89
	5.00	1.09	1.06	1.04	1.05	1.03	1.00	1.01	0.99	0.97	0.97	0.95	0.94	0.91
数	7.00	1.12	1.10	1.08	1.07	1.05	1.04	1.03	1.01	1.00	0.99	0.98	0.96	0.93
	10.00	1.14	1.12	1.11	1.09	1.07	1.06	1.04	1.03	1.02	1.00	0.99	0.98	0.95