



配光特性

図番 MR170156

カタログ番号	J559BN
オプション番号	100%
使用ランプ	RUCS LED13W
ランプ光束	1350.0 lm 1,000
最大光度	3185.5 cd
1/2ビーム角	
A断面	25.00 °
C断面	
B断面	



RUCS LED DOWNLIGHT	角度	光度
	0°	3186
	10°	1999
	20°	645
	30°	184
	40°	1
	50°	0
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

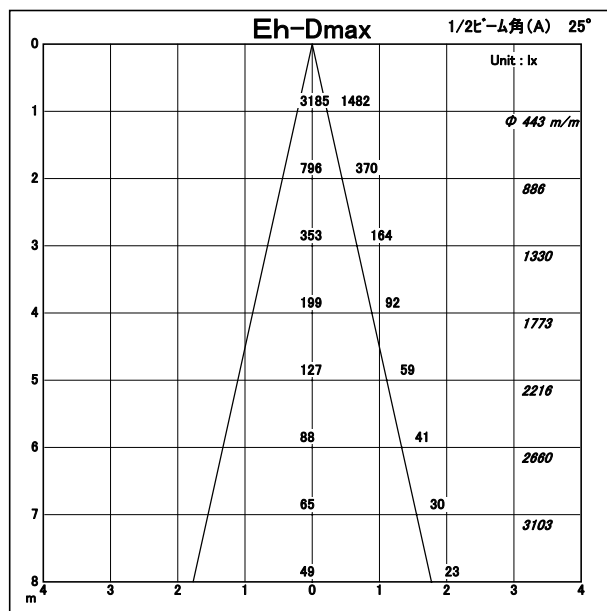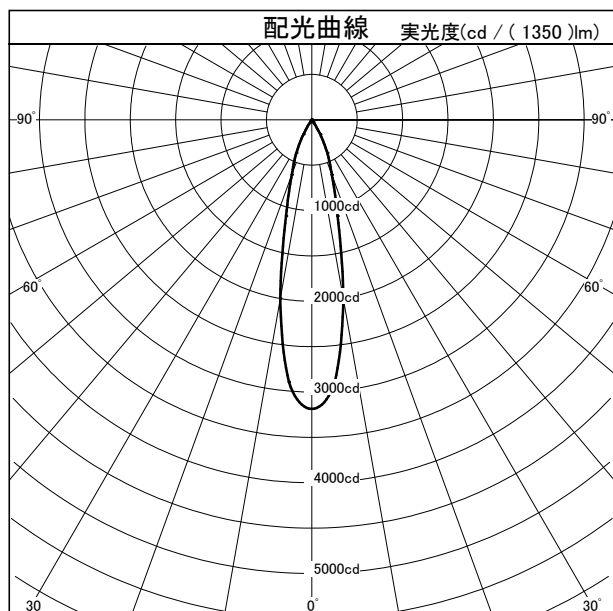

照 明 率 表		平均照度=台数*照明率*保守率* 1350 (光束)/(間口*奥行)											
床面反射率(%)		20											
天井面反射率(%)		0											
壁面反射率(%)		0											
室 指 数	0.50	0.49	0.46	0.45	0.48	0.46	0.45	0.48	0.46	0.45	0.48	0.46	0.45
	0.70	0.53	0.51	0.49	0.52	0.50	0.49	0.52	0.50	0.49	0.51	0.50	0.48
	1.00	0.57	0.54	0.53	0.56	0.54	0.52	0.55	0.53	0.52	0.54	0.53	0.52
	1.25	0.59	0.56	0.55	0.57	0.56	0.54	0.56	0.55	0.54	0.55	0.54	0.53
	1.50	0.60	0.58	0.56	0.59	0.57	0.56	0.57	0.56	0.55	0.56	0.55	0.54
	2.00	0.62	0.60	0.59	0.60	0.59	0.58	0.59	0.58	0.57	0.57	0.56	0.56
	2.50	0.63	0.61	0.60	0.61	0.60	0.59	0.59	0.58	0.58	0.58	0.57	0.56
	3.00	0.64	0.62	0.61	0.62	0.61	0.60	0.60	0.59	0.58	0.58	0.58	0.57
	4.00	0.65	0.64	0.63	0.63	0.62	0.61	0.61	0.60	0.59	0.59	0.58	0.58
	5.00	0.66	0.65	0.64	0.63	0.63	0.62	0.61	0.61	0.60	0.59	0.59	0.58
数	7.00	0.67	0.66	0.65	0.64	0.63	0.63	0.62	0.61	0.61	0.60	0.59	0.59
	10.00	0.67	0.67	0.66	0.65	0.64	0.64	0.62	0.62	0.61	0.60	0.60	0.59