


配光特性

図番 MR140219



カタログ番号	J525BN
オプション番号	3000K Ra83
使用ランプ	LMZ8-SW30
ランプ光束	1054.0 lm 1,000
器具効率	90.3 %
下方効率	90.1 %
上方効率	0.1 %
最大取付間隔	
A断面	0.23 H
C断面	
B断面	



G.E.M. 75SERIES	角度	光度
	0°	11449
	10°	2526
	20°	266
	30°	82
	40°	36
	50°	12
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	1

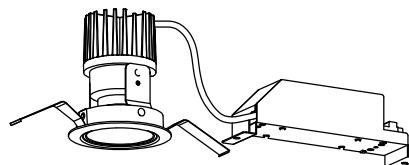

断面

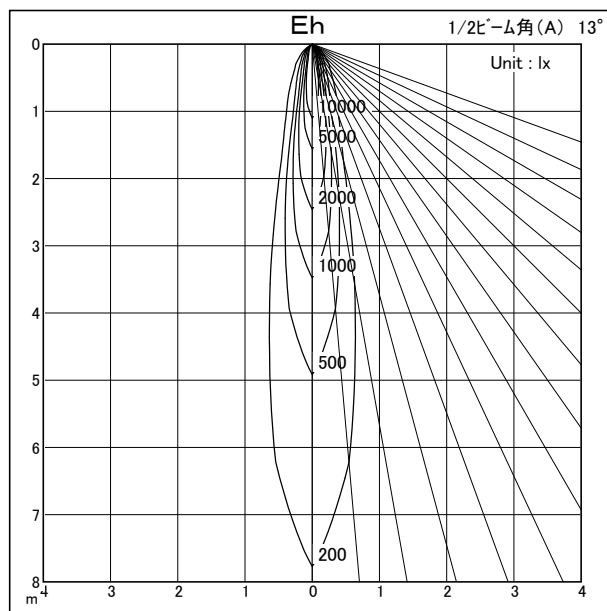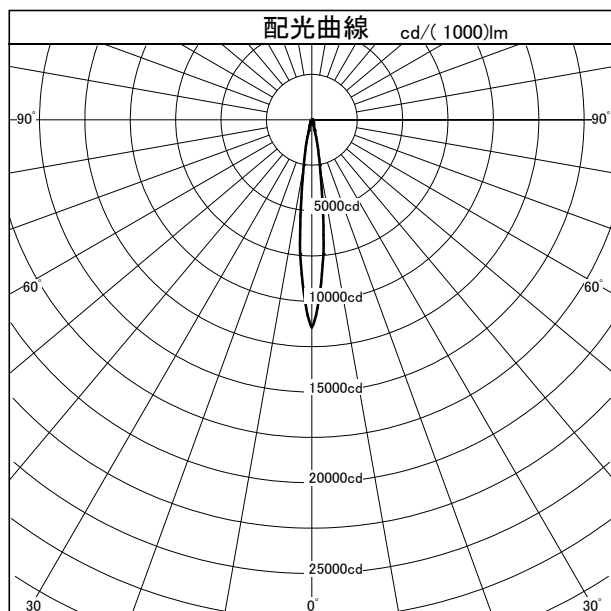

照 明 率 表		平均照度=台数×照明率×保守率×1054(光束)/(間口×奥行)											
床面反射率(%)		20											
天井面反射率(%)		0											
壁面反射率(%)		0											
室 指 数	0.50	0.84	0.81	0.80	0.83	0.81	0.80	0.83	0.81	0.79	0.82	0.81	0.79
	0.70	0.88	0.85	0.83	0.87	0.85	0.83	0.86	0.84	0.83	0.85	0.84	0.81
	1.00	0.92	0.89	0.87	0.90	0.88	0.86	0.89	0.87	0.86	0.88	0.86	0.84
	1.25	0.94	0.91	0.89	0.92	0.90	0.88	0.91	0.89	0.87	0.89	0.87	0.85
	1.50	0.96	0.93	0.91	0.93	0.91	0.90	0.92	0.90	0.88	0.90	0.88	0.86
	2.00	0.98	0.95	0.93	0.95	0.93	0.92	0.93	0.91	0.90	0.91	0.90	0.87
	2.50	0.99	0.97	0.95	0.96	0.95	0.93	0.94	0.92	0.91	0.91	0.90	0.87
	3.00	1.00	0.98	0.97	0.97	0.96	0.94	0.94	0.93	0.92	0.92	0.91	0.88
	4.00	1.02	1.00	0.99	0.98	0.97	0.96	0.95	0.94	0.93	0.92	0.91	0.88
	5.00	1.03	1.01	1.00	0.99	0.98	0.97	0.96	0.95	0.94	0.92	0.92	0.89
数	7.00	1.04	1.03	1.02	1.00	0.99	0.98	0.96	0.96	0.95	0.93	0.92	0.89
	10.00	1.05	1.04	1.03	1.01	1.00	0.99	0.97	0.96	0.96	0.93	0.93	0.89