


配光特性

図番 MR140222





カタログ番号	J500AN		
オプション番号	2700K Ra83		
使用ランプ	LXR8-SW27		
ランプ光束	1080.0	lm	1.000
器具効率	84.5 %		
下方効率	84.5 %		
上方効率	0.0 %		
最大取付間隔			
A断面	0.35 H		
C断面			
B断面			

G.E.M. 75SERIES	角度	光度
	0°	4990
10°	2620	
20°	418	
30°	118	
40°	38	
50°	12	
60°	0	
70°	0	
80°	0	
90°	0	
100°	0	
110°	0	
120°	0	
130°	0	
140°	0	
150°	0	
160°	0	
170°	0	
180°	0	

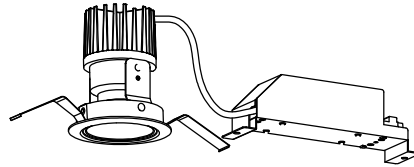

断面

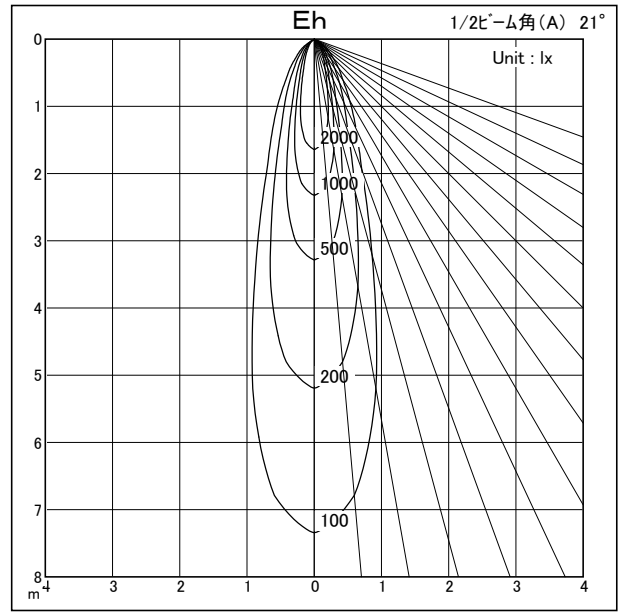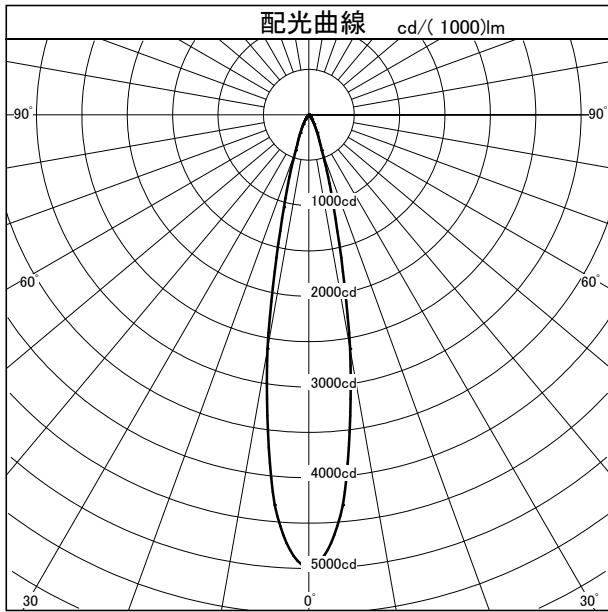

照明率表		平均照度=台数*照明率*保守率*1080(光束)/(間口*奥行)											
床面反射率(%)		20											
天井面反射率(%)		80			60			40			20		
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10
室	0.50	0.74	0.71	0.69	0.73	0.71	0.69	0.73	0.71	0.69	0.72	0.70	0.69
	0.70	0.79	0.76	0.74	0.78	0.76	0.74	0.77	0.75	0.73	0.77	0.75	0.73
	1.00	0.84	0.81	0.79	0.82	0.80	0.78	0.81	0.79	0.77	0.80	0.78	0.77
	1.25	0.86	0.83	0.81	0.84	0.82	0.80	0.83	0.81	0.79	0.81	0.80	0.78
	1.50	0.88	0.85	0.83	0.86	0.84	0.82	0.84	0.82	0.81	0.82	0.81	0.80
指	2.00	0.90	0.88	0.86	0.88	0.86	0.84	0.86	0.84	0.83	0.84	0.82	0.81
	2.50	0.92	0.90	0.88	0.89	0.87	0.86	0.87	0.85	0.84	0.84	0.83	0.82
	3.00	0.93	0.91	0.89	0.90	0.89	0.87	0.87	0.86	0.85	0.85	0.84	0.83
	4.00	0.95	0.93	0.92	0.91	0.90	0.89	0.88	0.87	0.86	0.86	0.85	0.84
数	5.00	0.96	0.94	0.93	0.92	0.91	0.90	0.89	0.88	0.87	0.86	0.85	0.85
	7.00	0.97	0.96	0.95	0.93	0.92	0.91	0.90	0.89	0.88	0.86	0.86	0.86
	10.00	0.98	0.97	0.96	0.94	0.93	0.93	0.90	0.90	0.89	0.87	0.86	0.86