


配光特性

図番 MS140219





カタログ番号	J545DN
オプション番号	4000K Ra80
使用ランプ	LMZ8-SW40
ランプ光束	1220.0 lm 1,000
最大光度	14283.1 cd
1/2ビーム角	
A断面	13.00 °
C断面	
B断面	

G.E.M. 75SERIES	角度	光度
	0°	14283
	10°	3152
	20°	332
	30°	103
	40°	45
	50°	15
	60°	1
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0



断面

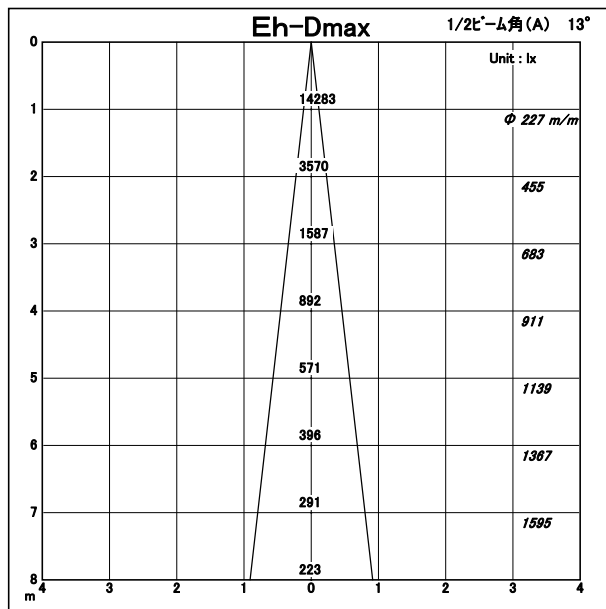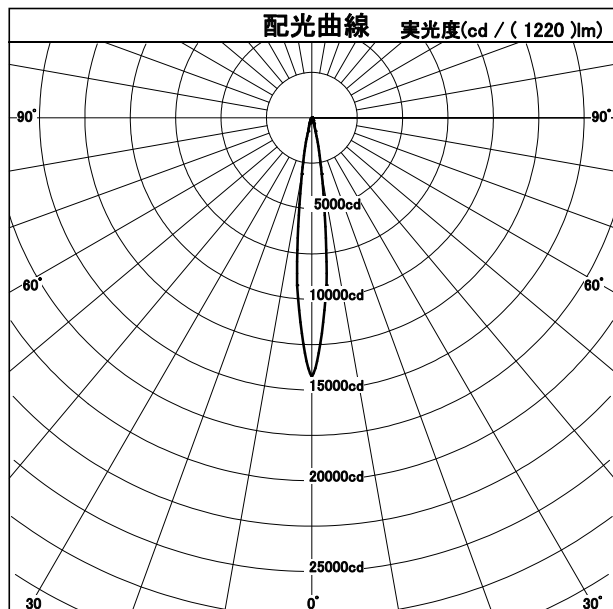

照 明 率 表		平均照度=台数 * 照明率 * 保守率 * 1220 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.86	0.83	0.82	0.85	0.83	0.81	0.85	0.83	0.81	0.84	0.82	0.81	0.80
	0.70	0.90	0.87	0.85	0.89	0.87	0.85	0.88	0.86	0.85	0.87	0.86	0.84	0.83
	1.00	0.94	0.91	0.89	0.93	0.90	0.88	0.91	0.89	0.88	0.90	0.88	0.87	0.86
	1.25	0.96	0.93	0.91	0.94	0.92	0.90	0.93	0.91	0.89	0.91	0.90	0.88	0.87
	1.50	0.98	0.95	0.93	0.96	0.93	0.92	0.94	0.92	0.91	0.92	0.90	0.89	0.88
指	2.00	1.00	0.98	0.96	0.97	0.96	0.94	0.95	0.94	0.92	0.93	0.92	0.91	0.89
	2.50	1.02	0.99	0.98	0.99	0.97	0.95	0.96	0.95	0.93	0.93	0.92	0.92	0.89
	3.00	1.03	1.01	0.99	0.99	0.98	0.97	0.97	0.95	0.94	0.94	0.93	0.92	0.90
	4.00	1.04	1.02	1.01	1.01	0.99	0.98	0.97	0.96	0.95	0.94	0.94	0.93	0.90
	5.00	1.05	1.04	1.02	1.01	1.00	0.99	0.98	0.97	0.96	0.95	0.94	0.93	0.91
数	7.00	1.06	1.05	1.04	1.02	1.01	1.01	0.98	0.98	0.97	0.95	0.95	0.94	0.91
	10.00	1.07	1.06	1.06	1.03	1.02	1.02	0.99	0.98	0.98	0.95	0.95	0.95	0.91