




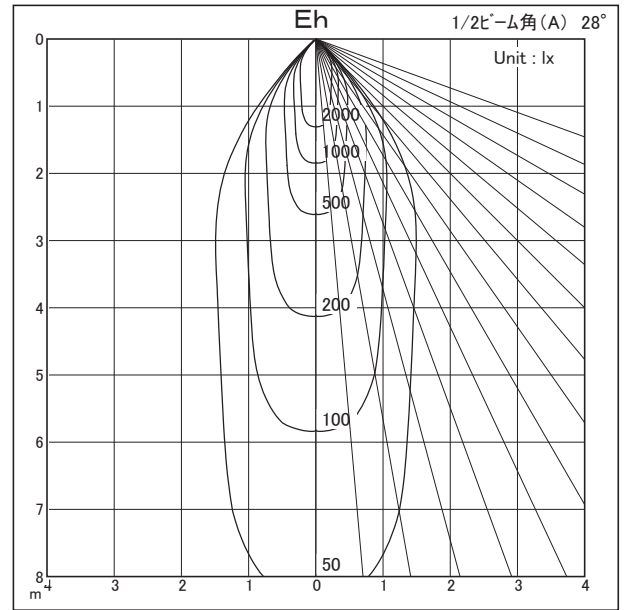

|         |                |    |       |
|---------|----------------|----|-------|
| カタログ番号  | X121DN         |    |       |
| オプション番号 | 4000K Ra85     |    |       |
| 使用ランプ   | XTM19804013CCA |    |       |
| ランプ光束   | 1300.0         | lm | 1,000 |
| 器具効率    | 98.3 %         |    |       |
| 下方効率    | 98.3 %         |    |       |
| 上方効率    | 0.0 %          |    |       |
| 最大取付間隔  |                |    |       |
| A断面     | 0.48 H         |    |       |
| C断面     |                |    |       |
| B断面     |                |    |       |

| <br>断面 | 角度   | 光度   |
|--|------|------|
|  | 0°   | 3400 |
|  | 10°  | 2586 |
|  | 20°  | 964  |
|  | 30°  | 500  |
|  | 40°  | 148  |
|  | 50°  | 1    |
|  | 60°  | 0    |
|  | 70°  | 0    |
|  | 80°  | 0    |
|  | 90°  | 0    |
|  | 100° | 0    |
|  | 110° | 0    |
|  | 120° | 0    |
|  | 130° | 0    |
|  | 140° | 0    |
|  | 150° | 0    |
|  | 160° | 0    |
| 170°   | 0    |      |
| 180°   | 0    |      |

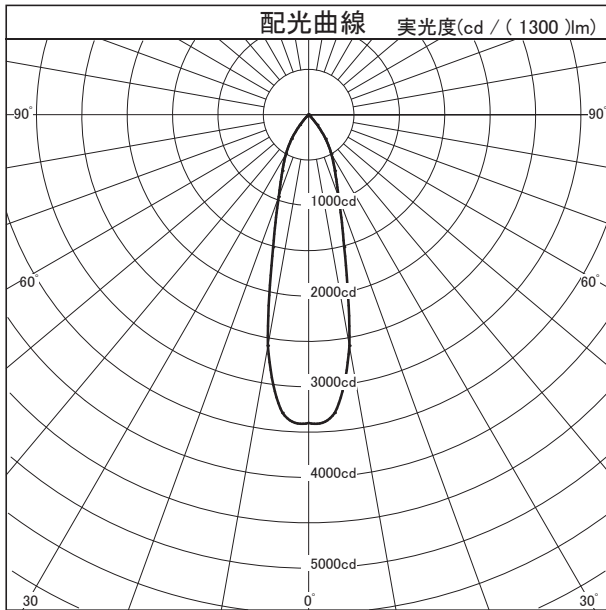

| 照明率表      |       | 平均照度=台数*照明率*保守率*1300(光束)/(間口*奥行) |      |      |      |      |      |      |      |      |      |      |      |      |
|-----------|-------|----------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| 床面反射率(%)  |       | 20                               |      |      |      |      |      |      |      |      |      |      |      |      |
| 天井面反射率(%) |       | 80                               |      |      | 60   |      |      | 40   |      |      | 20   |      |      |      |
| 壁面反射率(%)  |       | 50                               | 30   | 10   | 50   | 30   | 10   | 50   | 30   | 10   | 50   | 30   | 10   |      |
| 室         | 0.50  | 0.74                             | 0.69 | 0.66 | 0.73 | 0.69 | 0.66 | 0.73 | 0.69 | 0.66 | 0.72 | 0.68 | 0.66 | 0.65 |
|           | 0.70  | 0.83                             | 0.79 | 0.76 | 0.82 | 0.78 | 0.75 | 0.81 | 0.78 | 0.75 | 0.80 | 0.77 | 0.75 | 0.73 |
|           | 1.00  | 0.91                             | 0.87 | 0.84 | 0.90 | 0.86 | 0.83 | 0.88 | 0.85 | 0.83 | 0.87 | 0.84 | 0.82 | 0.80 |
|           | 1.25  | 0.96                             | 0.91 | 0.88 | 0.94 | 0.90 | 0.87 | 0.92 | 0.89 | 0.86 | 0.90 | 0.87 | 0.85 | 0.84 |
|           | 1.50  | 0.99                             | 0.95 | 0.92 | 0.96 | 0.93 | 0.90 | 0.94 | 0.91 | 0.89 | 0.92 | 0.90 | 0.88 | 0.86 |
| 指         | 2.00  | 1.02                             | 0.99 | 0.96 | 1.00 | 0.97 | 0.94 | 0.97 | 0.95 | 0.93 | 0.95 | 0.93 | 0.91 | 0.89 |
|           | 2.50  | 1.05                             | 1.02 | 0.99 | 1.02 | 0.99 | 0.97 | 0.99 | 0.97 | 0.95 | 0.96 | 0.94 | 0.93 | 0.91 |
|           | 3.00  | 1.06                             | 1.04 | 1.01 | 1.03 | 1.01 | 0.99 | 1.00 | 0.98 | 0.96 | 0.97 | 0.95 | 0.94 | 0.92 |
|           | 4.00  | 1.09                             | 1.07 | 1.05 | 1.05 | 1.03 | 1.02 | 1.02 | 1.00 | 0.99 | 0.98 | 0.97 | 0.96 | 0.93 |
|           | 5.00  | 1.10                             | 1.08 | 1.07 | 1.06 | 1.05 | 1.03 | 1.03 | 1.01 | 1.00 | 0.99 | 0.98 | 0.97 | 0.94 |
| 数         | 7.00  | 1.12                             | 1.11 | 1.09 | 1.08 | 1.07 | 1.05 | 1.04 | 1.03 | 1.02 | 1.00 | 0.99 | 0.99 | 0.95 |
|           | 10.00 | 1.13                             | 1.12 | 1.11 | 1.09 | 1.08 | 1.07 | 1.05 | 1.04 | 1.03 | 1.01 | 1.00 | 1.00 | 0.96 |