




配光特性

図番 MR150199

カタログ番号	X157DN
オプション番号	4000K Ra95
使用ランプ	XTM19954013CCA
ランプ光束	1300.0 lm 1,000
器具効率	98.3 %
下方効率	98.3 %
上方効率	0.0 %
最大取付間隔	
A断面	0.48 H
C断面	
B断面	



X-series4.0 BASE	角度	光度
	0°	3400
	10°	2586
	20°	964
	30°	500
	40°	148
	50°	1
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

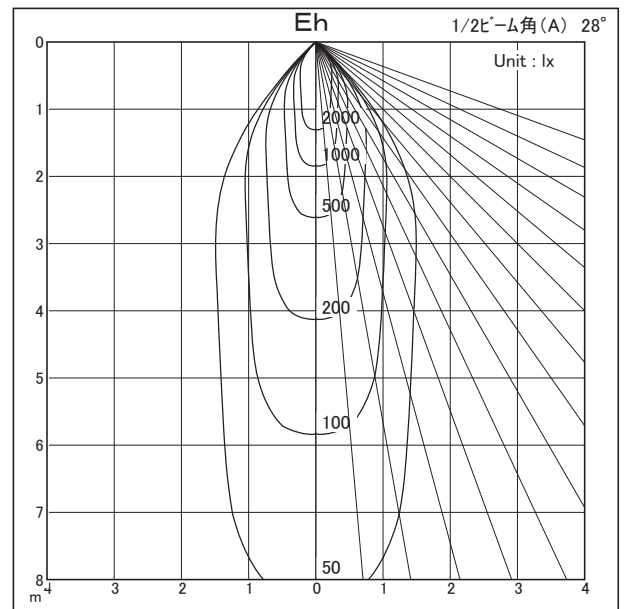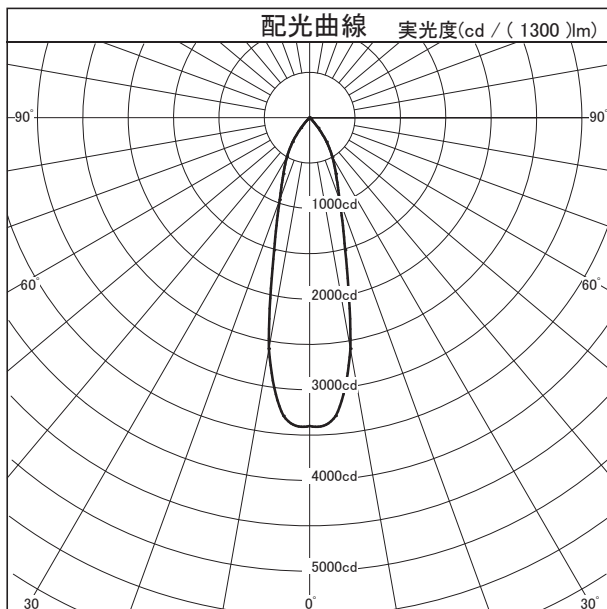

照 明 率 表		平均照度=台数 * 照明率 * 保守率 * 1300 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.74	0.69	0.66	0.73	0.69	0.66	0.73	0.69	0.66	0.72	0.68	0.66	0.65
	0.70	0.83	0.79	0.76	0.82	0.78	0.75	0.81	0.78	0.75	0.80	0.77	0.75	0.73
	1.00	0.91	0.87	0.84	0.90	0.86	0.83	0.88	0.85	0.83	0.87	0.84	0.82	0.80
	1.25	0.96	0.91	0.88	0.94	0.90	0.87	0.92	0.89	0.86	0.90	0.87	0.85	0.84
	1.50	0.99	0.95	0.92	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.86
指	2.00	1.02	0.99	0.96	1.00	0.97	0.94	0.97	0.95	0.93	0.95	0.93	0.91	0.89
	2.50	1.05	1.02	0.99	1.02	0.99	0.97	0.99	0.97	0.95	0.96	0.94	0.93	0.91
	3.00	1.06	1.04	1.01	1.03	1.01	0.99	1.00	0.98	0.96	0.97	0.95	0.94	0.92
	4.00	1.09	1.07	1.05	1.05	1.03	1.02	1.02	1.00	0.99	0.98	0.97	0.96	0.93
	5.00	1.10	1.08	1.07	1.06	1.05	1.03	1.03	1.01	1.00	0.99	0.98	0.97	0.94
数	7.00	1.12	1.11	1.09	1.08	1.07	1.05	1.04	1.03	1.02	1.00	0.99	0.99	0.95
	10.00	1.13	1.12	1.11	1.09	1.08	1.07	1.05	1.04	1.03	1.01	1.00	1.00	0.96