




配光特性

図番 MR150184

カタログ番号	X159AN
オプション番号	2700K Ra95
使用ランプ	XTM19952713CCA
ランプ光束	1300.0 lm 1,000
最大光度	1626.8 cd
1/2ビーム角	
A断面	24.00 °
C断面	
B断面	



X-series4.0 ADJUSTABLE	角度	光度
	0°	1627
	10°	1014
	20°	345
	30°	136
	40°	13
	50°	3
	60°	1
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

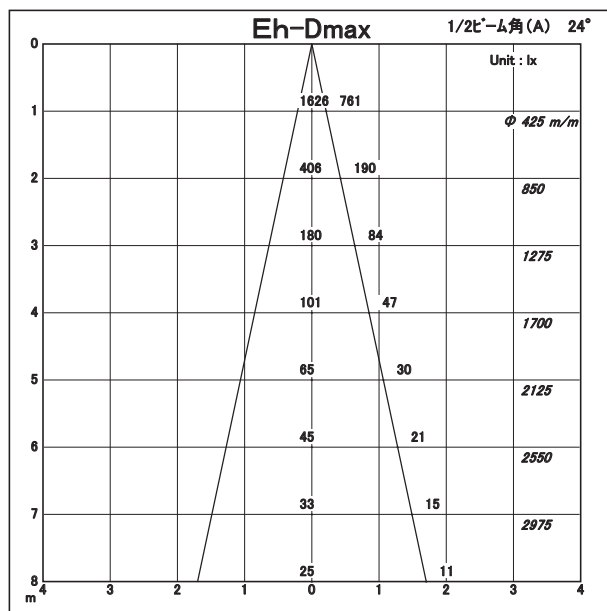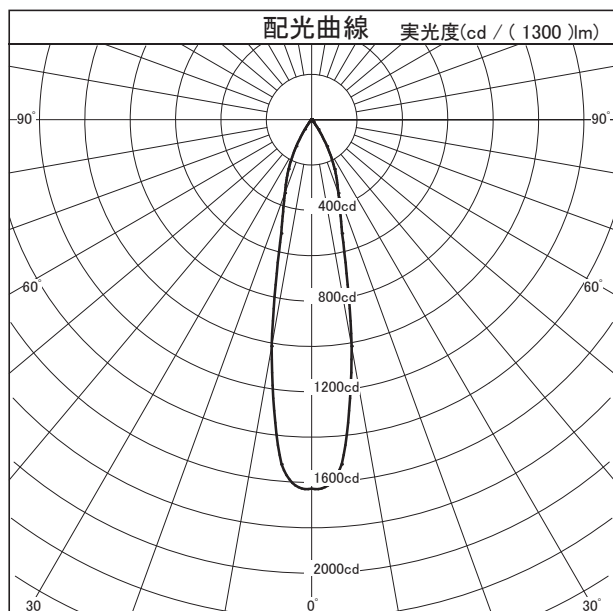

照 明 率 表		平均照度=台数*照明率*保守率* 1300 (光束)/(間口*奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80												0
壁面反射率(%)		50												0
室 指 数	0.50	0.27	0.26	0.25	0.27	0.26	0.25	0.27	0.26	0.25	0.27	0.26	0.25	0.24
	0.70	0.30	0.29	0.28	0.30	0.28	0.28	0.29	0.28	0.27	0.29	0.28	0.27	0.27
	1.00	0.33	0.31	0.30	0.32	0.31	0.30	0.31	0.30	0.30	0.31	0.30	0.29	0.29
	1.25	0.34	0.32	0.31	0.33	0.32	0.31	0.32	0.32	0.31	0.32	0.31	0.30	0.30
	1.50	0.35	0.33	0.32	0.34	0.33	0.32	0.33	0.32	0.32	0.32	0.32	0.31	0.31
	2.00	0.36	0.35	0.34	0.35	0.34	0.33	0.34	0.33	0.33	0.33	0.33	0.32	0.31
	2.50	0.37	0.36	0.35	0.36	0.35	0.34	0.35	0.34	0.33	0.34	0.33	0.33	0.32
	3.00	0.37	0.36	0.36	0.36	0.35	0.35	0.35	0.34	0.34	0.34	0.33	0.33	0.32
	4.00	0.38	0.37	0.37	0.37	0.36	0.36	0.35	0.35	0.35	0.34	0.34	0.34	0.33
	5.00	0.38	0.38	0.37	0.37	0.37	0.36	0.36	0.35	0.35	0.35	0.34	0.34	0.33
数	7.00	0.39	0.38	0.38	0.37	0.37	0.37	0.36	0.36	0.36	0.35	0.35	0.34	0.33
	10.00	0.39	0.39	0.39	0.38	0.38	0.37	0.36	0.36	0.36	0.35	0.35	0.35	0.33