


配光特性

図番 MR140328





カタログ番号	J514BN		
オプション番号	3000K Ra85		
使用ランプ	BLM-1311-30853		
ランプ光束	2100.0	lm	1,000
器具効率	68.8 %		
下方効率	68.8 %		
上方効率	0.0 %		
最大取付間隔			
A断面	0.33 H		
C断面			
B断面			

G.E.M. DL-FLOOD	角度	光度
	0°	8008
10°	3858	
20°	1203	
30°	140	
40°	2	
50°	2	
60°	2	
70°	1	
80°	1	
90°	0	
100°	0	
110°	0	
120°	0	
130°	0	
140°	0	
150°	0	
160°	0	
170°	0	
180°	0	

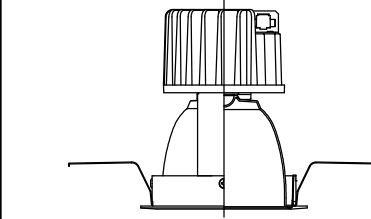

断面

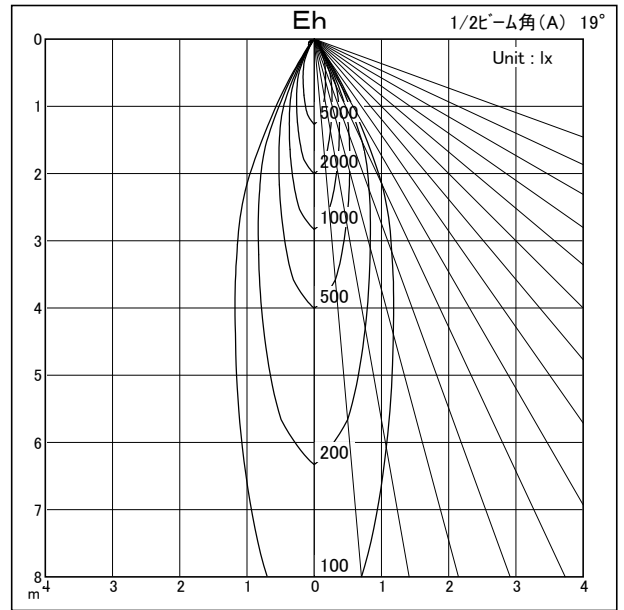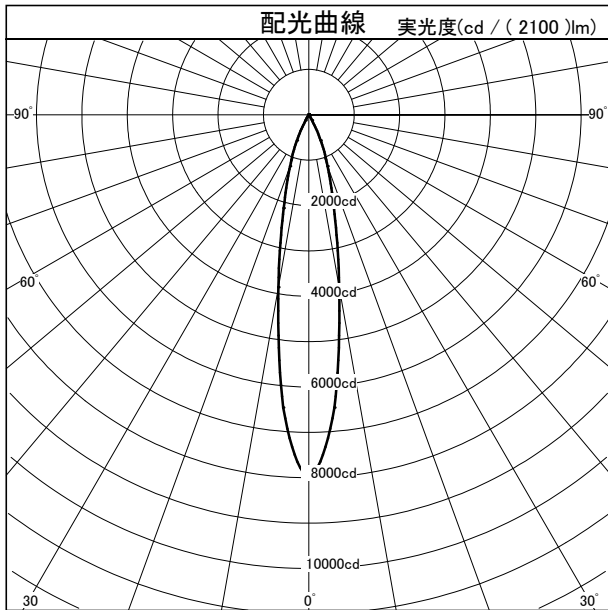

照明率表		平均照度=台数*照明率*保守率*2100(光束)/(間口*奥行)												
床面反射率(%)		20												
天井面反射率(%)		80			60			40			20			
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	
室	0.50	0.60	0.58	0.56	0.60	0.57	0.56	0.59	0.57	0.56	0.59	0.57	0.56	
	0.70	0.64	0.62	0.60	0.64	0.62	0.60	0.63	0.61	0.60	0.62	0.61	0.59	
	1.00	0.68	0.66	0.64	0.67	0.65	0.64	0.66	0.65	0.63	0.65	0.64	0.63	
	1.25	0.71	0.68	0.66	0.69	0.67	0.66	0.68	0.66	0.65	0.67	0.65	0.64	
	1.50	0.72	0.70	0.68	0.70	0.69	0.67	0.69	0.67	0.66	0.68	0.66	0.65	
	指	2.00	0.74	0.72	0.70	0.72	0.71	0.69	0.70	0.69	0.68	0.69	0.68	0.67
		2.50	0.75	0.74	0.72	0.73	0.72	0.71	0.71	0.70	0.69	0.69	0.68	0.68
		3.00	0.76	0.75	0.73	0.74	0.73	0.72	0.72	0.71	0.70	0.70	0.69	0.68
		4.00	0.78	0.76	0.75	0.75	0.74	0.73	0.73	0.72	0.71	0.70	0.70	0.69
		5.00	0.78	0.77	0.76	0.76	0.75	0.74	0.73	0.72	0.72	0.71	0.70	0.70
数	7.00	0.79	0.79	0.78	0.76	0.76	0.75	0.74	0.73	0.73	0.71	0.71	0.70	
	10.00	0.80	0.80	0.79	0.77	0.76	0.76	0.74	0.74	0.73	0.71	0.71	0.71	