



配光特性

図番 MR140328



カタログ番号	J514DN
オプション番号	4000K Ra85
使用ランプ	BLM-1311-40853
ランプ光束	2300.0 lm 1,000
器具効率	68.8 %
下方効率	68.8 %
上方効率	0.0 %
最大取付間隔	
A断面	0.33 H
C断面	
B断面	

G.E.M. DL-FLOOD	角度	光度
	0°	8770
	10°	4226
	20°	1318
	30°	153
	40°	2
	50°	2
	60°	2
	70°	1
	80°	1
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

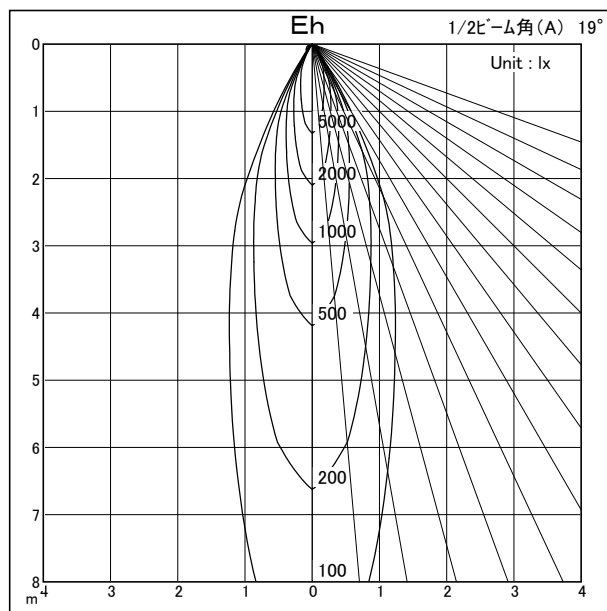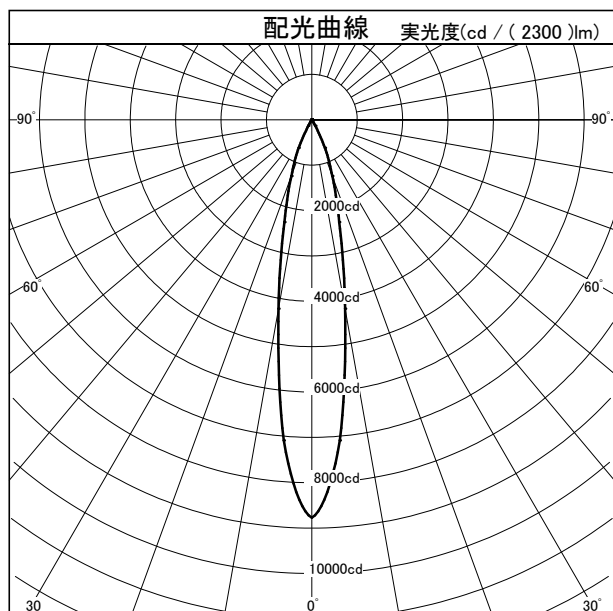

照 明 率 表		平均照度=台数×照明率×保守率×2300(光束)/(間口×奥行)											
床面反射率(%)		20											
天井面反射率(%)		0											
壁面反射率(%)		0											
室 指 数	0.50	0.60	0.58	0.56	0.60	0.57	0.56	0.59	0.57	0.56	0.59	0.57	0.56
	0.70	0.64	0.62	0.60	0.64	0.62	0.60	0.63	0.61	0.60	0.62	0.61	0.59
	1.00	0.68	0.66	0.64	0.67	0.65	0.64	0.66	0.65	0.63	0.65	0.64	0.63
	1.25	0.71	0.68	0.66	0.69	0.67	0.66	0.68	0.66	0.65	0.67	0.65	0.64
	1.50	0.72	0.70	0.68	0.70	0.69	0.67	0.69	0.67	0.66	0.68	0.66	0.65
	2.00	0.74	0.72	0.70	0.72	0.71	0.69	0.70	0.69	0.68	0.69	0.68	0.67
	2.50	0.75	0.74	0.72	0.73	0.72	0.71	0.71	0.70	0.69	0.69	0.68	0.66
	3.00	0.76	0.75	0.73	0.74	0.73	0.72	0.72	0.71	0.70	0.70	0.69	0.66
	4.00	0.78	0.76	0.75	0.75	0.74	0.73	0.73	0.72	0.71	0.70	0.70	0.67
	5.00	0.78	0.77	0.76	0.76	0.75	0.74	0.73	0.72	0.72	0.71	0.70	0.67
数	7.00	0.79	0.79	0.78	0.76	0.76	0.75	0.74	0.73	0.73	0.71	0.71	0.70
	10.00	0.80	0.80	0.79	0.77	0.76	0.76	0.74	0.74	0.73	0.71	0.71	0.68