

配光特性

図番 MR140184





カタログ番号	J517CN		
オプション番号	3500K Ra85		
使用ランプ	BLM-1311-35853		
ランプ光束	2200.0	lm	1.000
最大光度	4363.6 cd		
1/2ビーム角	33.00°		
A断面	33.00°		
C断面			
B断面			

角度	光度
0°	4364
10°	3778
20°	1208
30°	54
40°	7
50°	8
60°	8
70°	7
80°	6
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

G.E.M. ADJUSTABLE WIDE

断面

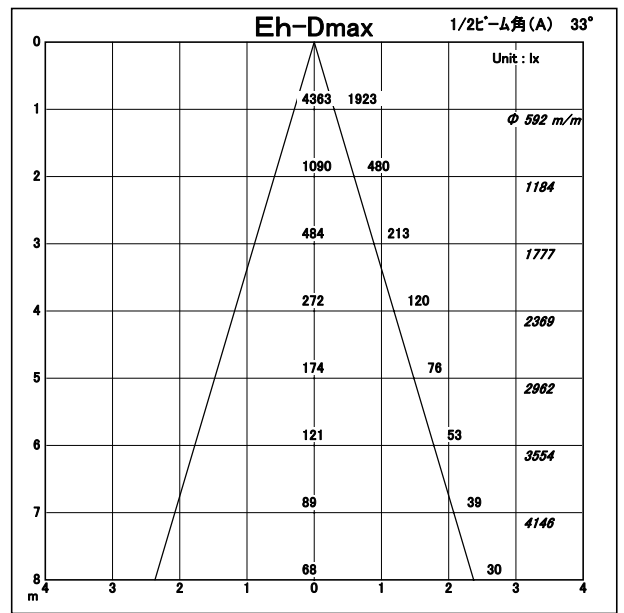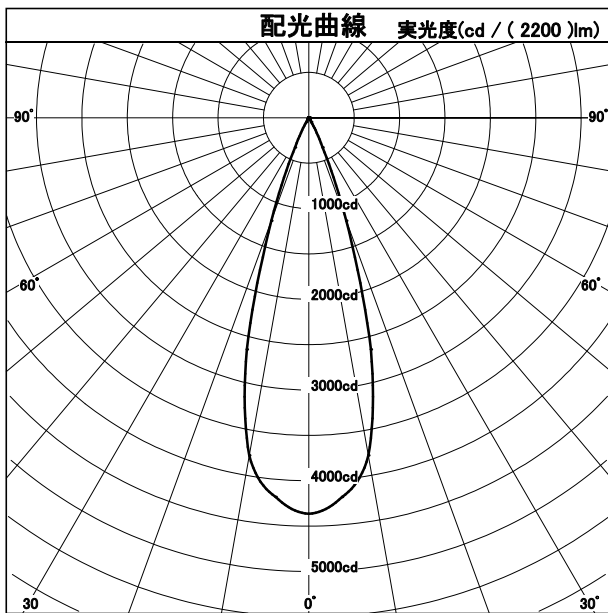

照明率表		平均照度=台数*照明率*保守率*2200(光束)/(間口*奥行)												
床面反射率(%)		20												
天井面反射率(%)		80			60			40			20			
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	
室	0.50	0.51	0.49	0.48	0.51	0.49	0.48	0.51	0.49	0.48	0.50	0.49	0.48	0.47
	0.70	0.55	0.53	0.52	0.55	0.53	0.51	0.54	0.52	0.51	0.54	0.52	0.51	0.50
	1.00	0.59	0.57	0.55	0.58	0.56	0.55	0.57	0.55	0.54	0.56	0.55	0.54	0.53
	1.25	0.61	0.59	0.57	0.60	0.58	0.56	0.58	0.57	0.56	0.57	0.56	0.55	0.54
	1.50	0.62	0.60	0.58	0.61	0.59	0.58	0.59	0.58	0.57	0.58	0.57	0.56	0.55
指	2.00	0.64	0.62	0.61	0.62	0.61	0.60	0.61	0.59	0.58	0.59	0.58	0.57	0.56
	2.50	0.65	0.64	0.62	0.63	0.62	0.61	0.61	0.60	0.59	0.60	0.59	0.58	0.57
	3.00	0.66	0.65	0.63	0.64	0.63	0.62	0.62	0.61	0.60	0.60	0.60	0.59	0.57
	4.00	0.67	0.66	0.65	0.65	0.64	0.63	0.63	0.62	0.61	0.61	0.60	0.60	0.58
	5.00	0.68	0.67	0.66	0.66	0.65	0.64	0.63	0.63	0.62	0.61	0.61	0.60	0.58
数	7.00	0.69	0.68	0.67	0.66	0.66	0.65	0.64	0.63	0.63	0.62	0.61	0.61	0.59
	10.00	0.70	0.69	0.68	0.67	0.66	0.66	0.64	0.64	0.63	0.62	0.62	0.61	0.59