



配光特性

図番 MR140184

カタログ番号	J517DN
オプション番号	4000K Ra85
使用ランプ	BLM-1311-40853
ランプ光束	2300.0 lm 1,000
最大光度	4562 cd
1/2ビーム角	
A断面	33.00 °
C断面	
B断面	



G.E.M. ADJUSTABLE WIDE	角度	光度
	0°	4562
	10°	3950
	20°	1263
	30°	56
	40°	7
	50°	8
	60°	9
	70°	8
	80°	6
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

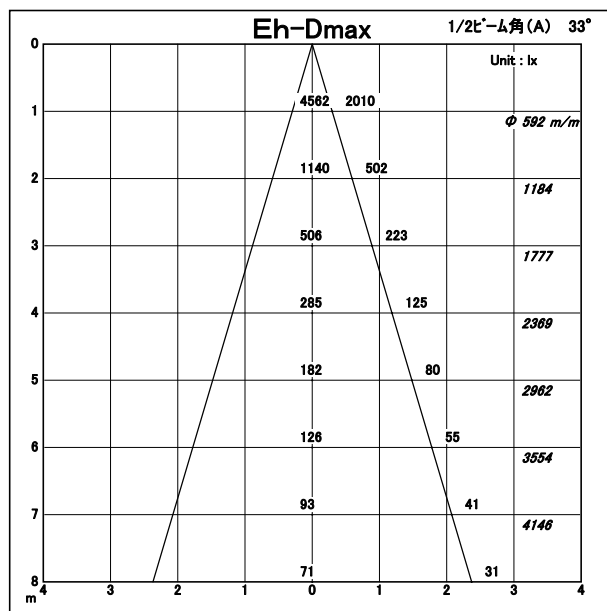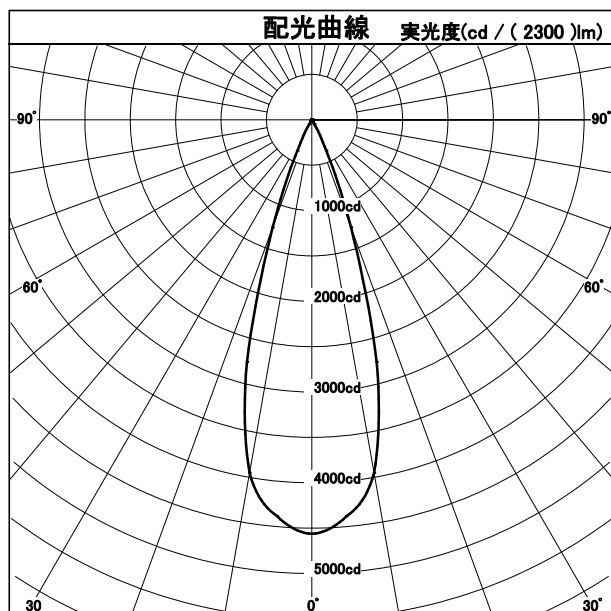

照 明 率 表		平均照度=台数 * 照明率 * 保守率 * 2300 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.51	0.49	0.48	0.51	0.49	0.48	0.51	0.49	0.48	0.50	0.49	0.48	0.47
	0.70	0.55	0.53	0.52	0.55	0.53	0.51	0.54	0.52	0.51	0.54	0.52	0.51	0.50
	1.00	0.59	0.57	0.55	0.58	0.56	0.55	0.57	0.55	0.54	0.56	0.55	0.54	0.53
	1.25	0.61	0.59	0.57	0.60	0.58	0.56	0.58	0.57	0.56	0.57	0.56	0.55	0.54
	1.50	0.62	0.60	0.58	0.61	0.59	0.58	0.59	0.58	0.57	0.58	0.57	0.56	0.55
指	2.00	0.64	0.62	0.61	0.62	0.61	0.60	0.61	0.59	0.58	0.59	0.58	0.57	0.56
	2.50	0.65	0.64	0.62	0.63	0.62	0.61	0.61	0.60	0.59	0.60	0.59	0.58	0.57
	3.00	0.66	0.65	0.63	0.64	0.63	0.62	0.62	0.61	0.60	0.60	0.60	0.59	0.57
	4.00	0.67	0.66	0.65	0.65	0.64	0.63	0.63	0.62	0.61	0.61	0.60	0.60	0.58
	5.00	0.68	0.67	0.66	0.66	0.65	0.64	0.63	0.63	0.62	0.61	0.61	0.60	0.58
数	7.00	0.69	0.68	0.67	0.66	0.66	0.65	0.64	0.63	0.63	0.62	0.61	0.61	0.59
	10.00	0.70	0.69	0.68	0.67	0.66	0.66	0.64	0.64	0.63	0.62	0.62	0.61	0.59