


# 配光特性

図番 MR150880





カタログ番号	X127AW		
オプション番号	2700K Ra85		
使用ランプ	XTM19802713CCA		
ランプ光束	1300.0	lm	1.000
最大光度	969	cd	
1/2ビーム角			
A断面	71.00 °		
C断面			
B断面			

X-series4.0 UNIVERSAL	角度	光度
	0°	969
10°	947	
20°	821	
30°	626	
40°	323	
50°	66	
60°	20	
70°	11	
80°	4	
90°	0	
100°	0	
110°	0	
120°	0	
130°	0	
140°	0	
150°	0	
160°	0	
170°	0	
180°	0	

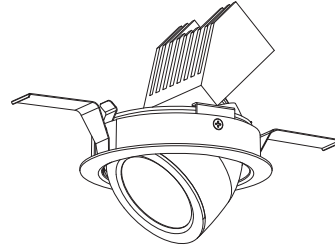

断面

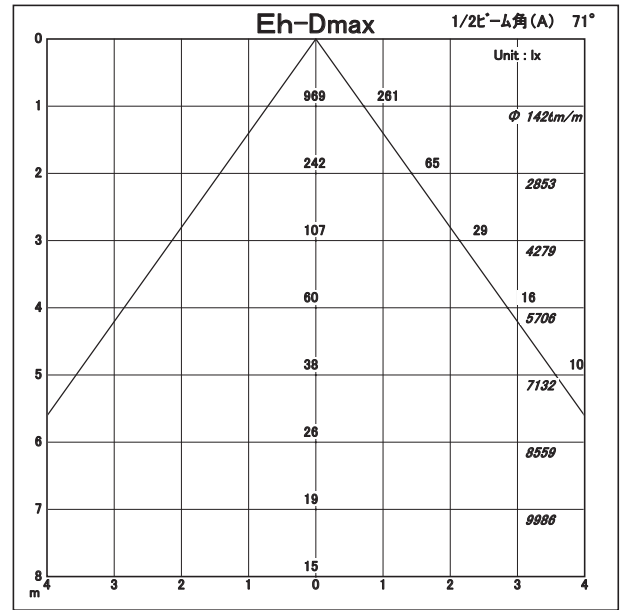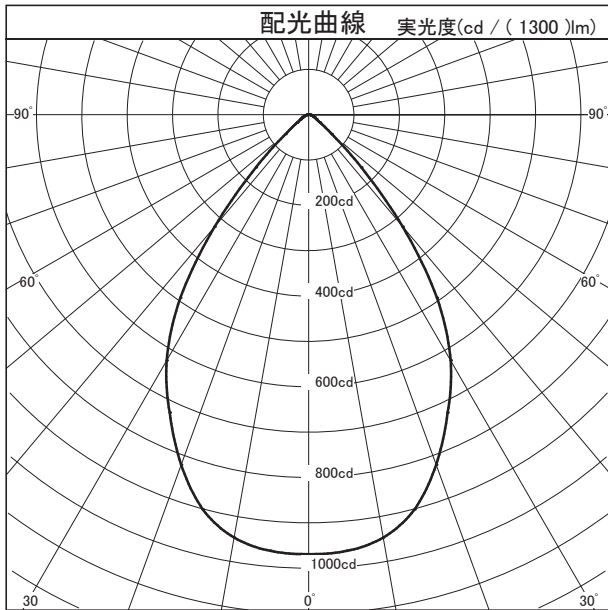

照明率表														平均照度=台数*照明率*保守率*1300(光束)/(間口*奥行)				
床面反射率(%)		20												0				
天井面反射率(%)		80				60				40				20				0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
室	0.50	0.52	0.46	0.42	0.51	0.46	0.42	0.50	0.45	0.42	0.50	0.45	0.42	0.50	0.45	0.42	0.41	
	0.70	0.64	0.58	0.54	0.63	0.58	0.54	0.62	0.57	0.54	0.61	0.56	0.53	0.61	0.56	0.53	0.52	
	1.00	0.75	0.69	0.65	0.73	0.68	0.65	0.71	0.67	0.64	0.70	0.66	0.64	0.70	0.66	0.64	0.62	
	1.25	0.80	0.75	0.71	0.78	0.74	0.70	0.76	0.72	0.69	0.74	0.71	0.69	0.74	0.71	0.69	0.67	
	1.50	0.84	0.79	0.76	0.82	0.78	0.74	0.80	0.76	0.73	0.78	0.75	0.72	0.78	0.75	0.72	0.70	
指	2.00	0.89	0.85	0.82	0.86	0.83	0.80	0.84	0.81	0.79	0.82	0.79	0.77	0.82	0.79	0.77	0.75	
	2.50	0.92	0.89	0.86	0.89	0.86	0.84	0.87	0.84	0.82	0.84	0.82	0.80	0.84	0.82	0.80	0.78	
	3.00	0.94	0.91	0.88	0.91	0.88	0.86	0.88	0.86	0.84	0.85	0.83	0.82	0.85	0.83	0.82	0.79	
	4.00	0.98	0.95	0.92	0.94	0.92	0.90	0.91	0.89	0.87	0.88	0.86	0.85	0.88	0.86	0.85	0.82	
	5.00	0.99	0.97	0.95	0.96	0.94	0.92	0.92	0.91	0.89	0.89	0.88	0.87	0.89	0.88	0.87	0.84	
数	7.00	1.01	1.00	0.98	0.97	0.96	0.95	0.94	0.93	0.91	0.90	0.89	0.89	0.90	0.89	0.89	0.85	
	10.00	1.03	1.02	1.01	0.99	0.98	0.97	0.95	0.94	0.93	0.91	0.91	0.90	0.91	0.91	0.90	0.87	