



配光特性

図番 MR150879

カタログ番号	X165BW
オプション番号	3000K Ra95
使用ランプ	XTM19953013CCA
ランプ光束	1300.0 lm 1,000
最大光度	1881 cd
1/2ビーム角	
A断面	39.00 °
C断面	
B断面	



X-series4.0 UNIVERSAL	角度	光度
	0°	1881
	10°	1611
	20°	906
	30°	525
	40°	249
	50°	28
	60°	10
	70°	5
	80°	2
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

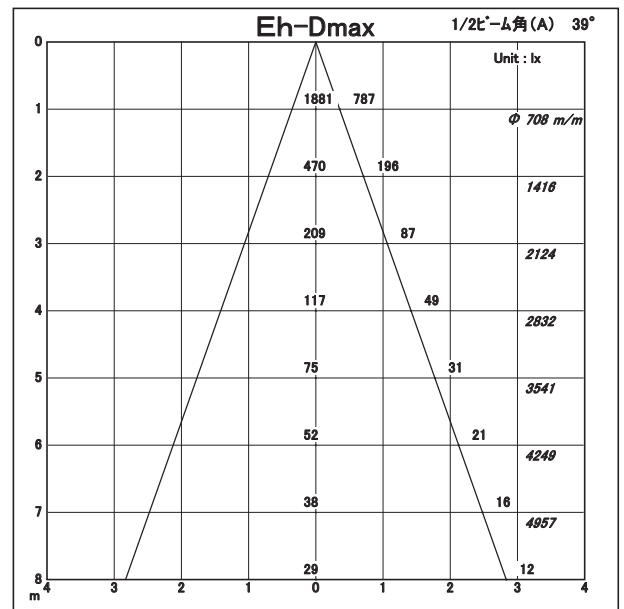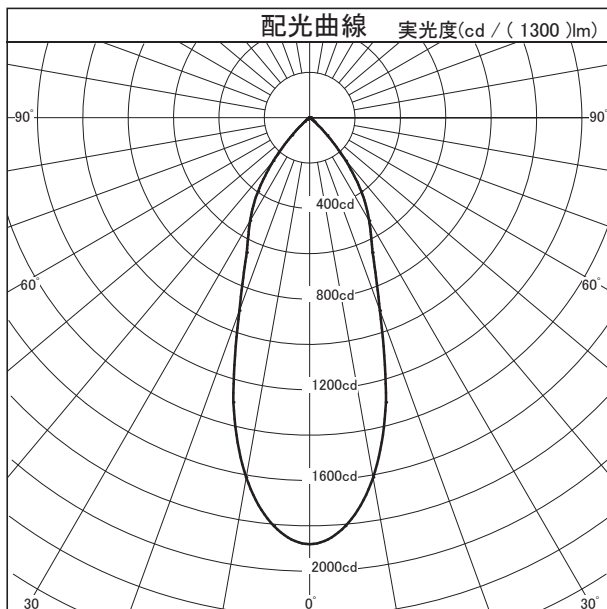

照 明 率 表		平均照度=台数*照明率*保守率* 1300 (光束)/(間口*奥行)											
床面反射率(%)		20											
天井面反射率(%)		0											
壁面反射率(%)		0											
室	0.50	0.60	0.55	0.52	0.59	0.55	0.52	0.59	0.55	0.52	0.58	0.54	0.52
	0.70	0.71	0.66	0.62	0.70	0.65	0.62	0.69	0.65	0.62	0.68	0.64	0.61
	1.00	0.80	0.75	0.72	0.78	0.74	0.71	0.77	0.73	0.71	0.76	0.72	0.70
	1.25	0.85	0.80	0.77	0.83	0.79	0.76	0.81	0.78	0.75	0.79	0.77	0.74
	1.50	0.88	0.84	0.81	0.86	0.82	0.80	0.84	0.81	0.78	0.82	0.79	0.77
	2.00	0.93	0.89	0.86	0.90	0.87	0.84	0.87	0.85	0.83	0.85	0.83	0.81
	2.50	0.95	0.92	0.89	0.92	0.90	0.87	0.90	0.87	0.85	0.87	0.85	0.84
	3.00	0.97	0.94	0.92	0.94	0.91	0.89	0.91	0.89	0.87	0.88	0.87	0.85
	4.00	1.00	0.97	0.95	0.96	0.94	0.93	0.93	0.91	0.90	0.90	0.89	0.88
	5.00	1.01	0.99	0.98	0.98	0.96	0.94	0.94	0.93	0.92	0.91	0.90	0.89
指	7.00	1.03	1.02	1.00	0.99	0.98	0.97	0.95	0.94	0.94	0.92	0.91	0.91
	10.00	1.05	1.04	1.03	1.00	1.00	0.99	0.97	0.96	0.95	0.93	0.92	0.92