





# 配光特性

図番 MR160761

カタログ番号	X155AN	
	2700K Ra85	
使用ランプ	XTM19802713	
ランプ光束	1300.0	lm <small>1.000</small>
器具効率	53.1 %	
下方効率	53.1 %	
上方効率	0.0 %	
最大取付間隔		
A断面		
C断面		
B断面		



X-SERIES DOWNLIGHT	角度	光度
	0°	642
10°	875	
20°	881	
30°	623	
40°	365	
50°	163	
60°	75	
70°	35	
80°	9	
90°	0	
100°	0	
110°	0	
120°	0	
130°	0	
140°	0	
150°	0	
160°	0	
170°	0	
180°	0	

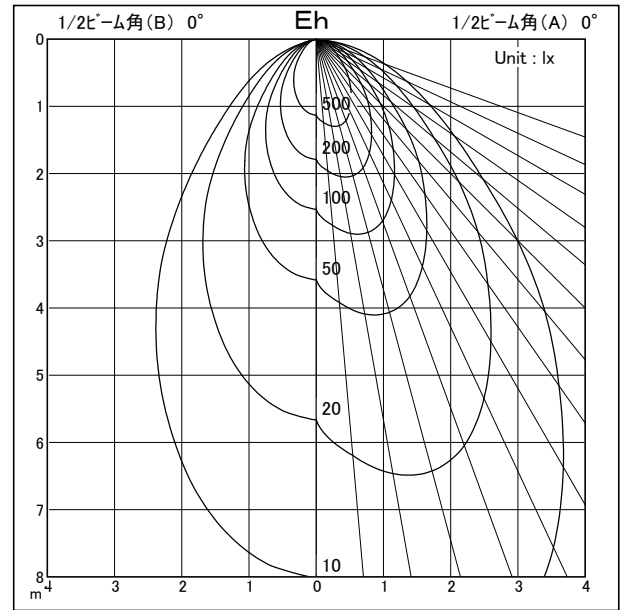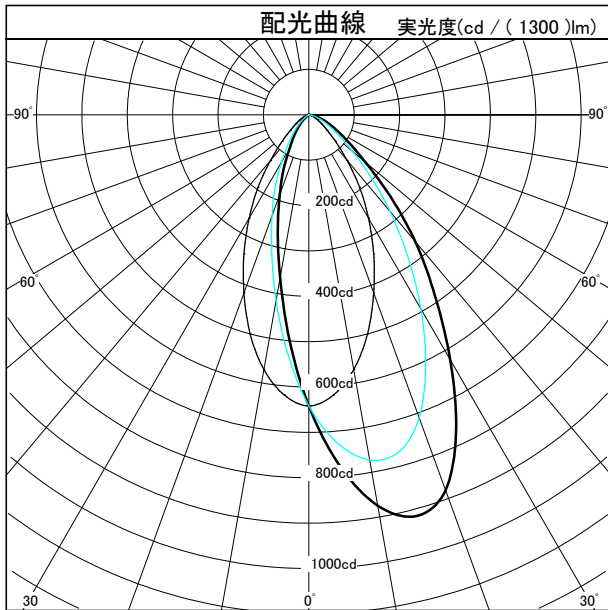

壁面照度分布							単灯							連灯						
(m)							(m)							(m)						
0.50 — 1.00 — 1.50 — 2.00 — 2.50 — 3.00							0.50 — 1.00 — 1.50 — 2.00 — 2.50 — 3.00							0.50 — 1.00 — 1.50 — 2.00 — 2.50 — 3.00						
0.50	42	24	7	2			0.50	57	51	57				0.50	57	51	57			
1.00	90	53	16	5	2	1	1.00	127	117	127				1.00	127	117	127			
1.50	89	62	25	8	3	1	1.50	147	143	147				1.50	147	143	147			
2.00	65	49	25	11	4	2	2.00	126	125	126				2.00	126	125	126			
2.50	43	35	21	11	5	2	2.50	99	99	99				2.50	99	99	99			
3.00	28	25	17	10	5	3	3.00	76	76	76				3.00	76	76	76			
3.50	19	17	12	8	5	3	3.50	58	58	58				3.50	58	58	58			

壁面からの距離：1.0m 器具間隔：1.0m 保守率：1.0  
単位：lx