





配光特性

図番 MR160761



カタログ番号	X155DN
	4000K Ra85
使用ランプ	XTM19804013
ランプ光束	1300.0 lm 1,000
器具効率	53.1 %
下方効率	53.1 %
上方効率	0.0 %
最大取付間隔	
A断面	
C断面	
B断面	

X-SERIES DOWNLIGHT	角度	光度
	0°	642
	10°	875
	20°	881
	30°	623
	40°	365
	50°	163
	60°	75
	70°	35
	80°	9
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

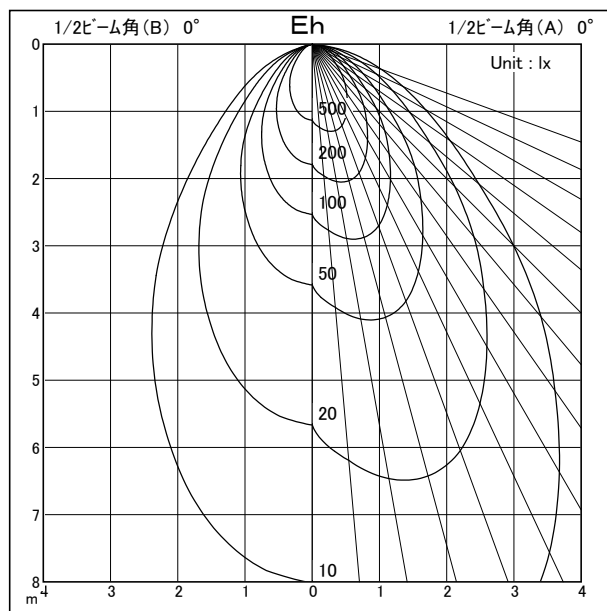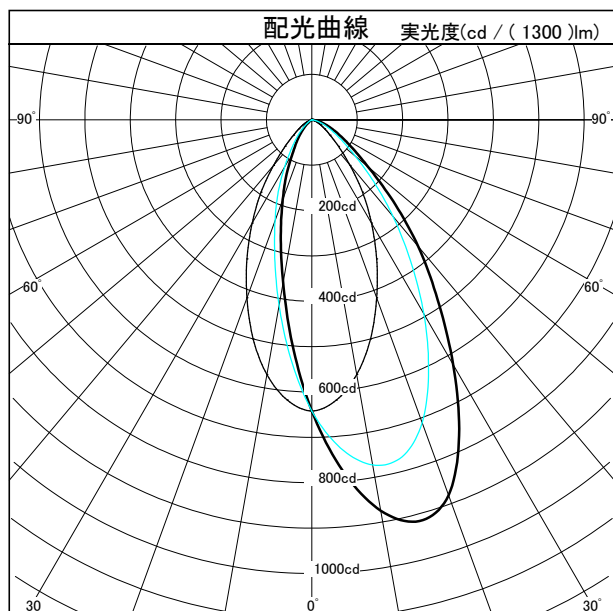

壁面照度分布 単灯							連灯						
(m)	0.50	1.00	1.50	2.00	2.50	3.00	(m)	0.50					
0.50	42	24	7	2			0.50	57	51	57			
1.00	90	53	16	5	2	1	1.00	127	117	127			
1.50	89	62	25	8	3	1	1.50	147	143	147			
2.00	65	49	25	11	4	2	2.00	126	125	126			
2.50	43	35	21	11	5	2	2.50	99	99	99			
3.00	28	25	17	10	5	3	3.00	76	76	76			
3.50	19	17	12	8	5	3	3.50	58	58	58			
壁面からの距離 : 1.0m 器具間隔 : 1.0m 保守率 : 1.0							単位 : lx (m)						

TL LABORATORY INC.