

配光特性





図番 MR140330



カタログ番号	J518AN	
オプション番号	2700K Ra85	
使用ランプ	LM-1311-27853	
ランプ光束	2000.0	lm <small>1.000</small>
器具効率	41.6 %	
下方効率	41.6 %	
上方効率	0.0 %	
最大取付間隔		
A断面		
C断面		
B断面		

角度	光度
0°	721
10°	1212
20°	1256
30°	756
40°	343
50°	162
60°	98
70°	55
80°	21
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

G.E.M. WALLWASHER

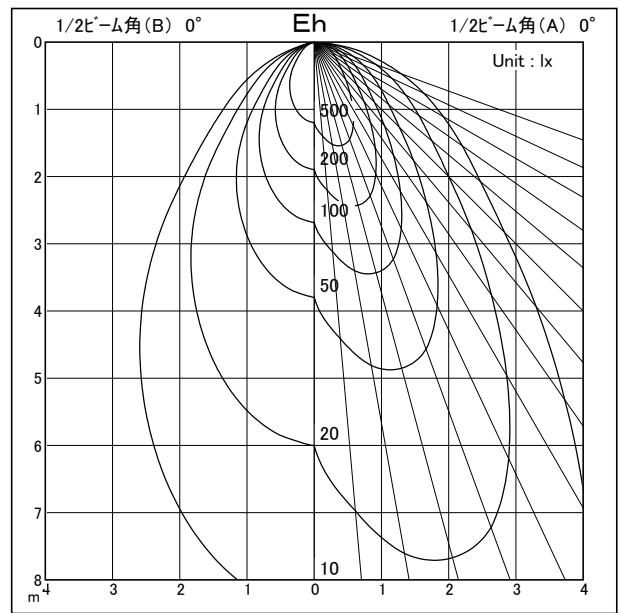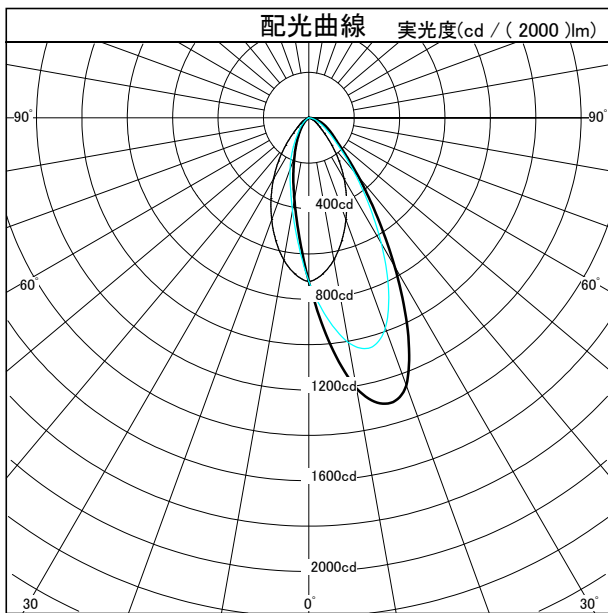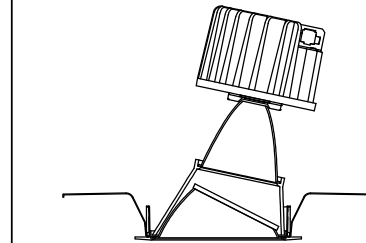

(m)	0.50	1.00	1.50	2.00	2.50	3.00
0.50	59	34	10	3	1	
1.00	80	52	20	7	2	1
1.50	99	66	27	10	4	2
2.00	85	62	30	13	5	2
2.50	60	48	28	14	6	3
3.00	40	34	23	13	7	3
3.50	27	24	17	11	6	4

壁面からの距離: 1.0m 器具間隔: 1.0m 保守率: 1.0

(m)	0.50	1.00	1.50	2.00	2.50	3.00	3.50
0.50	82	74	82				
1.00	125	120	125				
1.50	162	156	162				
2.00	159	155	159				
2.50	132	131	132				
3.00	103	103	103				
3.50	80	79	80				

単位: lx