




# 配光特性

図番 MR140330



カタログ番号	J518BN	
オプション番号	3000K Ra85	
使用ランプ	LM-1311-30853	
ランプ光束	2100.0	lm <small>1.000</small>
器具効率	41.6 %	
下方効率	41.6 %	
上方効率	0.0 %	
最大取付間隔		
A断面		
C断面		
B断面		

G.E.M. WALLWASHER	角度	光度
	0°	757
10°	1272	
20°	1319	
30°	794	
40°	360	
50°	170	
60°	103	
70°	58	
80°	22	
90°	0	
100°	0	
110°	0	
120°	0	
130°	0	
140°	0	
150°	0	
160°	0	
170°	0	
180°	0	

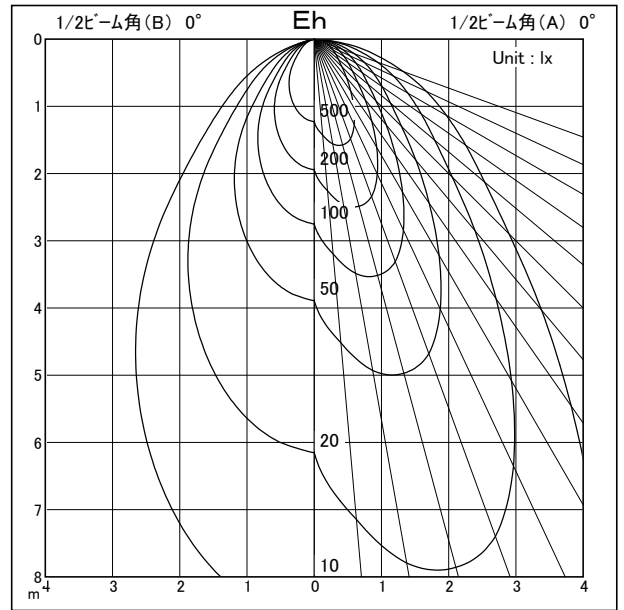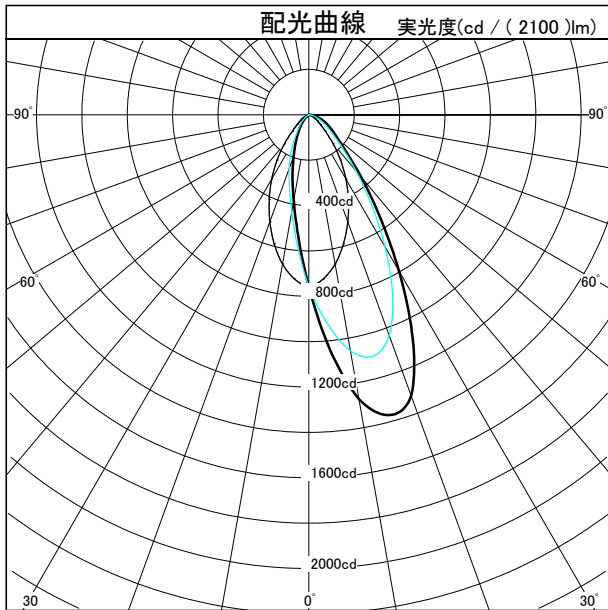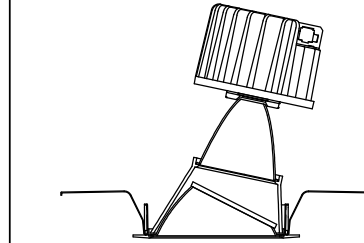

壁面照度分布	単灯					
	0.50	1.00	1.50	2.00	2.50	3.00
0.50	62	36	11	3	1	
1.00	84	55	21	7	2	1
1.50	104	69	29	10	4	2
2.00	89	65	32	13	5	2
2.50	63	50	29	14	7	3
3.00	42	36	24	13	7	4
3.50	28	25	18	11	7	4

壁面からの距離: 1.0m 器具間隔: 1.0m 保守率: 1.0

壁面照度分布	連灯		
	0.50	1.00	1.50
0.50	86	77	86
1.00	131	126	131
1.50	171	163	171
2.00	167	163	167
2.50	139	137	139
3.00	109	108	109
3.50	84	83	84

単位: lx