

配光特性




図番 MR140330



カタログ番号	J518CN	
オプション番号	3500K Ra85	
使用ランプ	LM-1311-35853	
ランプ光束	2200.0	lm <small>1.000</small>
器具効率	41.6 %	
下方効率	41.6 %	
上方効率	0.0 %	
最大取付間隔		
A断面		
C断面		
B断面		

角度	光度
0°	793
10°	1333
20°	1382
30°	832
40°	377
50°	178
60°	108
70°	61
80°	23
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

G.E.M. WALLWASHER

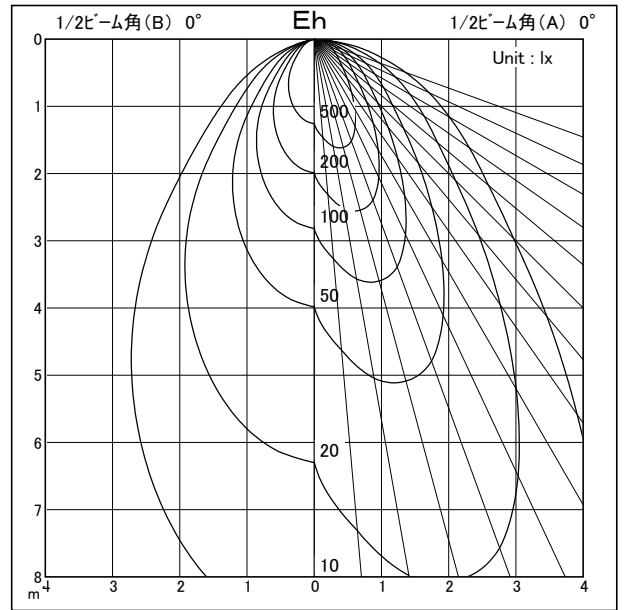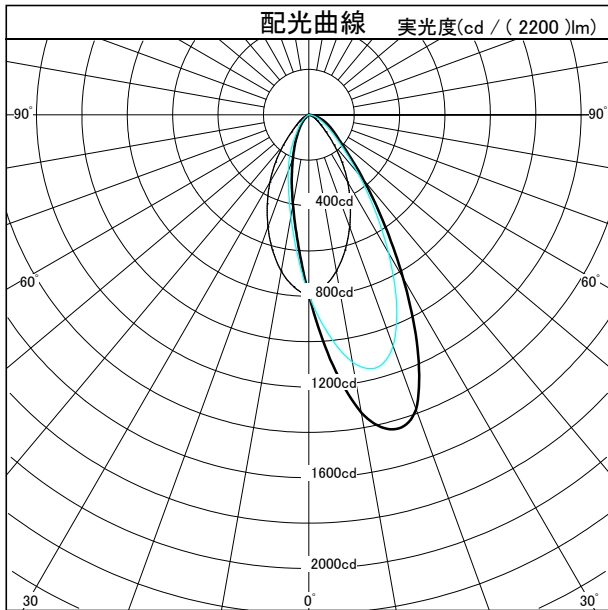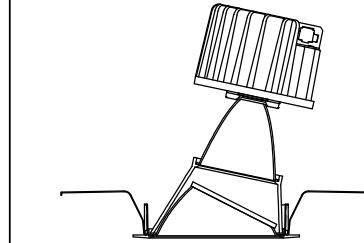

壁面照度分布							単灯							連灯						
(m)							(m)							(m)						
0.50	1.00	1.50	2.00	2.50	3.00		0.50	1.00	1.50	2.00	2.50	3.00		0.50	1.00	1.50	2.00	2.50	3.00	
65	37	12	3	1			90	81	90				90	81	90					
88	57	22	7	3	1		138	132	138				138	132	138					
109	73	30	11	4	2	1	179	171	179				179	171	179					
93	68	33	14	6	2	1	174	170	174				174	170	174					
66	53	31	15	7	3	1	145	144	145				145	144	145					
44	38	25	14	7	4	2	114	114	114				114	114	114					
30	26	19	12	7	4	2	88	87	88				88	87	88					

壁面からの距離: 1.0m 器具間隔: 1.0m 保守率: 1.0
単位: lx