

# 配光特性

図番 MR150428





カタログ番号	X139BW		
オプション番号	3000K Ra85		
使用ランプ	XTM19803013CCA		
ランプ光束	1300.0	lm	1,000
器具効率	43.0 %		
下方効率	40.9 %		
上方効率	2.2 %		
最大取付間隔			
A断面	0.89 H		
C断面			
B断面			

角度	光度
0°	594
10°	551
20°	448
30°	243
40°	53
50°	23
60°	21
70°	18
80°	14
90°	10
100°	9
110°	7
120°	5
130°	2
140°	0
150°	0
160°	0
170°	0
180°	0

X-series4.0 ACCESSORY

断面

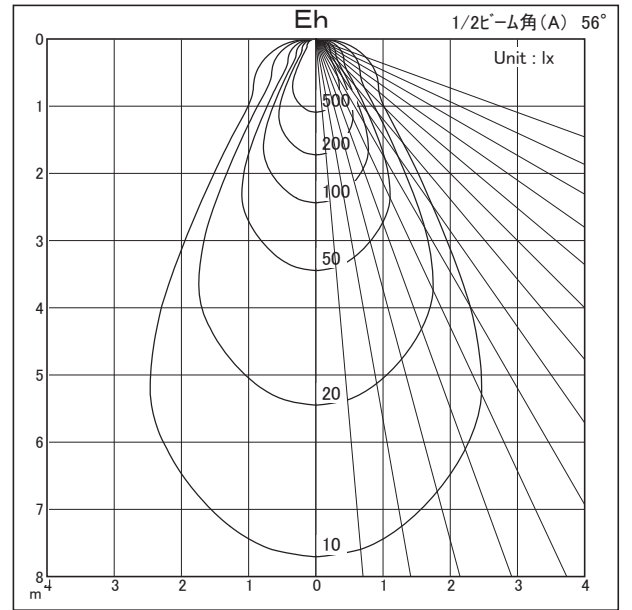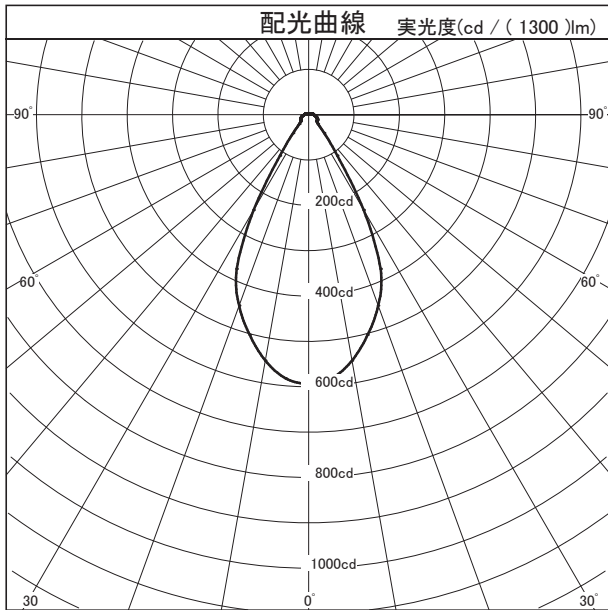

照明率表		平均照度=台数*照明率*保守率*1300(光束)/(間口*奥行)												
床面反射率(%)		20												
天井面反射率(%)		80			60			40			20			
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	
室	0.50	0.25	0.23	0.21	0.25	0.23	0.21	0.24	0.22	0.21	0.24	0.22	0.21	0.20
	0.70	0.30	0.27	0.26	0.29	0.27	0.25	0.29	0.27	0.25	0.28	0.26	0.25	0.24
	1.00	0.35	0.32	0.30	0.34	0.31	0.30	0.33	0.31	0.29	0.32	0.30	0.29	0.28
	1.25	0.37	0.34	0.32	0.36	0.34	0.32	0.35	0.33	0.31	0.33	0.32	0.31	0.30
	1.50	0.39	0.36	0.34	0.37	0.35	0.34	0.36	0.34	0.33	0.35	0.33	0.32	0.31
指	2.00	0.41	0.39	0.37	0.39	0.38	0.36	0.38	0.36	0.35	0.36	0.35	0.34	0.33
	2.50	0.43	0.41	0.39	0.41	0.39	0.38	0.39	0.38	0.37	0.38	0.36	0.36	0.34
	3.00	0.44	0.42	0.40	0.42	0.40	0.39	0.40	0.39	0.38	0.38	0.37	0.36	0.35
	4.00	0.45	0.44	0.42	0.43	0.42	0.41	0.41	0.40	0.39	0.39	0.39	0.38	0.36
	5.00	0.46	0.45	0.44	0.44	0.43	0.42	0.42	0.41	0.40	0.40	0.39	0.39	0.37
数	7.00	0.47	0.46	0.45	0.45	0.44	0.43	0.43	0.42	0.41	0.41	0.40	0.40	0.38
	10.00	0.48	0.47	0.47	0.46	0.45	0.45	0.43	0.43	0.42	0.41	0.41	0.41	0.39