

配光特性


図番 MS100092





カタログ番号	X148DW		
オプション番号	4000K Ra80		
使用ランプ	XTM19804013CCA		
ランプ光束	1300.0	lm	1,000
器具効率	72.5 %		
下方効率	72.5 %		
上方効率	0.0 %		
最大取付間隔			
A断面	0.39 H		
C断面			
B断面			

角度	光度
0°	3768
10°	2235
20°	742
30°	314
40°	17
50°	0
60°	0
70°	0
80°	0
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

X-series 軒下灯 高出力



断面

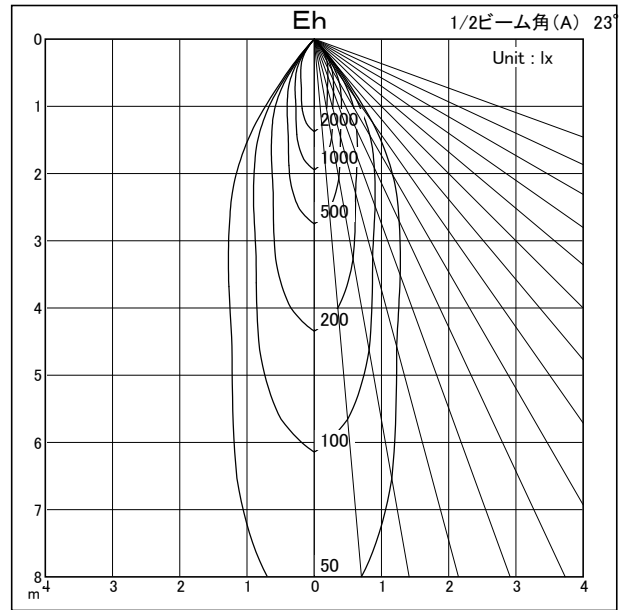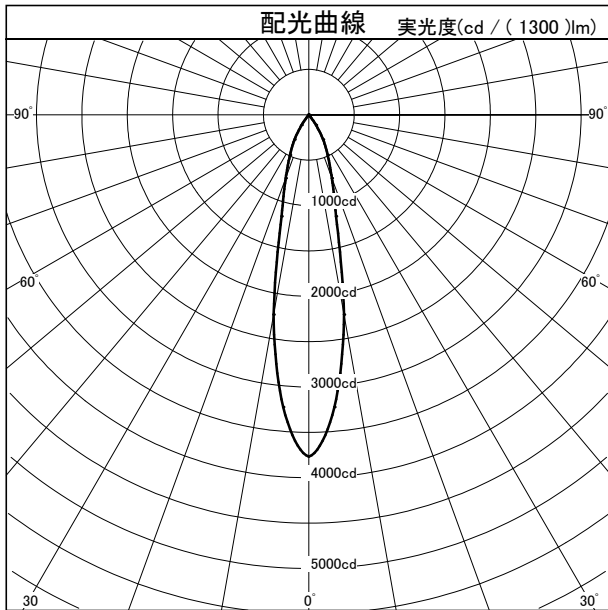

照明率表		平均照度=台数*照明率*保守率*1300(光束)/(間口*奥行)												
床面反射率(%)		20												
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.58	0.56	0.54	0.58	0.55	0.53	0.57	0.55	0.53	0.57	0.55	0.53	0.53
	0.70	0.64	0.61	0.59	0.63	0.61	0.59	0.63	0.60	0.59	0.62	0.60	0.58	0.58
	1.00	0.69	0.66	0.64	0.68	0.66	0.64	0.67	0.65	0.63	0.66	0.64	0.63	0.62
	1.25	0.72	0.69	0.67	0.70	0.68	0.66	0.69	0.67	0.66	0.68	0.66	0.65	0.64
	1.50	0.74	0.71	0.69	0.72	0.70	0.68	0.71	0.69	0.67	0.69	0.68	0.66	0.65
	2.00	0.76	0.74	0.72	0.74	0.72	0.71	0.72	0.71	0.70	0.71	0.69	0.68	0.67
	2.50	0.78	0.76	0.74	0.76	0.74	0.73	0.73	0.72	0.71	0.71	0.70	0.70	0.68
	3.00	0.79	0.77	0.76	0.76	0.75	0.74	0.74	0.73	0.72	0.72	0.71	0.70	0.68
指	4.00	0.81	0.79	0.78	0.78	0.77	0.75	0.75	0.74	0.73	0.73	0.72	0.71	0.69
	5.00	0.82	0.80	0.79	0.79	0.78	0.77	0.76	0.75	0.74	0.73	0.73	0.72	0.70
	7.00	0.83	0.82	0.81	0.79	0.79	0.78	0.76	0.76	0.75	0.74	0.73	0.73	0.70
	10.00	0.84	0.83	0.82	0.80	0.80	0.79	0.77	0.77	0.76	0.74	0.74	0.74	0.71