



配光特性

図番 MS100094



カタログ番号	X150BW
オプション番号	3000K Ra80
使用ランプ	XTM19803013CCA
ランプ光束	1300.0 lm 1,000
器具効率	72.4 %
下方効率	72.4 %
上方効率	0.0 %
最大取付間隔	
A断面	0.87 H
C断面	
B断面	

X-series 軒下灯 高出力	角度	光度
	0°	1129
	10°	1030
	20°	825
	30°	510
	40°	143
	50°	13
	60°	10
	70°	13
	80°	8
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

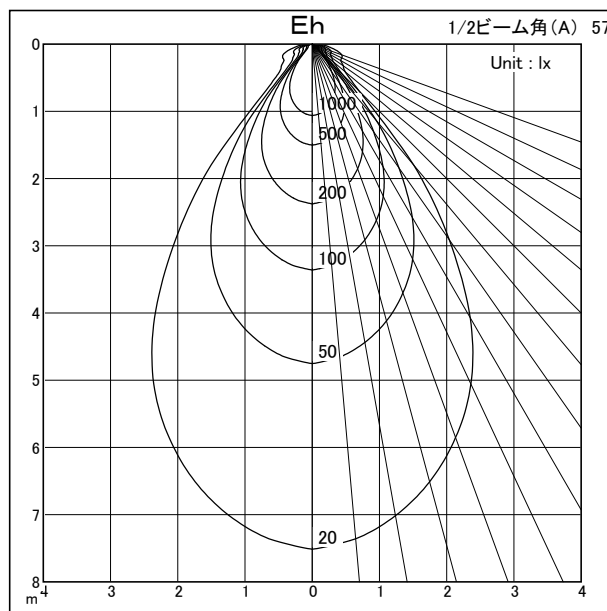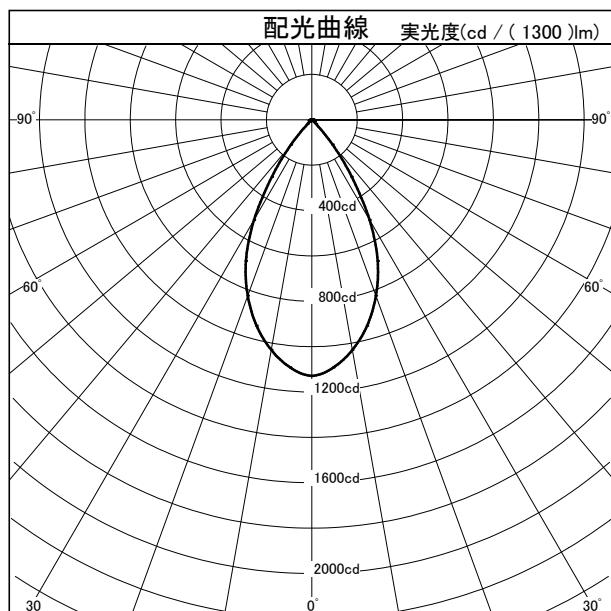

照 明 率 表		平均照度=台数×照明率×保守率×1300(光束)/(間口×奥行)												
床面反射率(%)		20												
天井面反射率(%)		0												
壁面反射率(%)		0												
室	0.50	0.46	0.42	0.40	0.46	0.42	0.40	0.45	0.42	0.39	0.45	0.42	0.39	0.38
	0.70	0.55	0.51	0.48	0.54	0.50	0.48	0.53	0.50	0.48	0.52	0.49	0.47	0.46
	1.00	0.62	0.58	0.56	0.61	0.58	0.55	0.60	0.57	0.55	0.59	0.56	0.54	0.53
	1.25	0.66	0.62	0.60	0.65	0.61	0.59	0.63	0.60	0.58	0.62	0.59	0.58	0.56
	1.50	0.69	0.65	0.63	0.67	0.64	0.62	0.65	0.63	0.61	0.64	0.62	0.60	0.59
	2.00	0.72	0.69	0.67	0.70	0.68	0.66	0.68	0.66	0.64	0.66	0.65	0.63	0.62
	2.50	0.75	0.72	0.70	0.72	0.70	0.68	0.70	0.68	0.67	0.68	0.67	0.65	0.63
	3.00	0.76	0.74	0.72	0.74	0.72	0.70	0.71	0.70	0.68	0.69	0.68	0.66	0.65
	4.00	0.78	0.76	0.75	0.76	0.74	0.72	0.73	0.72	0.70	0.71	0.70	0.69	0.66
	5.00	0.80	0.78	0.76	0.77	0.75	0.74	0.74	0.73	0.72	0.71	0.71	0.70	0.67
数	7.00	0.81	0.80	0.79	0.78	0.77	0.76	0.75	0.74	0.74	0.72	0.72	0.71	0.69
	10.00	0.83	0.82	0.81	0.79	0.78	0.78	0.76	0.75	0.75	0.73	0.73	0.72	0.70