


配光特性

図番 MR150202





カタログ番号	X145DN		
オプション番号	4000K Ra95		
使用ランプ	XTM19954030CCA		
ランプ光束	3000.0	lm	1.000
器具効率	94.4 %		
下方効率	94.4 %		
上方効率	0.0 %		
最大取付間隔			
A断面	0.68 H		
C断面			
B断面			

角度	光度
0°	4876
10°	4096
20°	2687
30°	1328
40°	281
50°	3
60°	5
70°	8
80°	16
90°	4
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0



断面

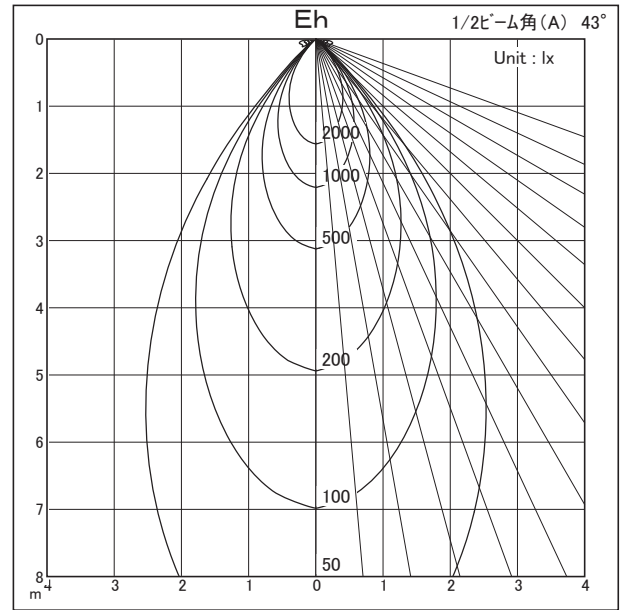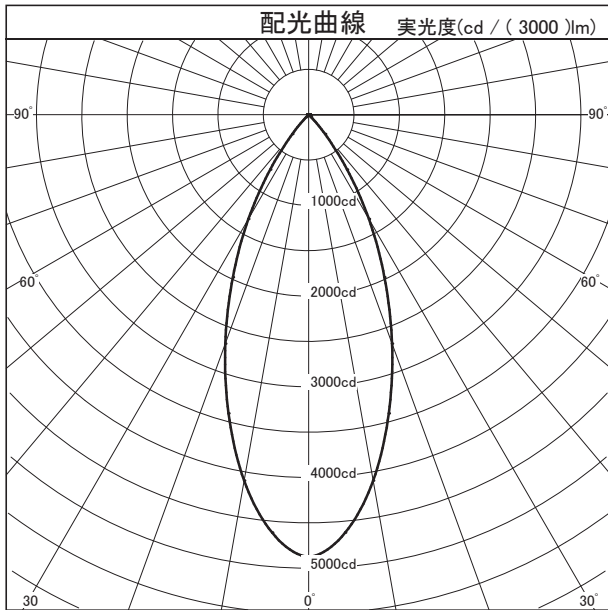

照明率表		平均照度=台数*照明率*保守率*3000(光束)/(間口*奥行)												
床面反射率(%)		20												
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.66	0.61	0.58	0.65	0.61	0.58	0.65	0.61	0.58	0.64	0.60	0.58	0.57
	0.70	0.76	0.71	0.68	0.75	0.71	0.68	0.74	0.70	0.67	0.73	0.70	0.67	0.66
	1.00	0.85	0.80	0.77	0.83	0.79	0.76	0.82	0.78	0.76	0.80	0.77	0.75	0.74
	1.25	0.89	0.85	0.82	0.87	0.84	0.81	0.86	0.82	0.80	0.84	0.81	0.79	0.77
	1.50	0.93	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.86	0.84	0.82	0.80
指	2.00	0.97	0.93	0.90	0.94	0.91	0.88	0.91	0.89	0.87	0.89	0.87	0.85	0.83
	2.50	0.99	0.96	0.93	0.96	0.94	0.91	0.93	0.91	0.89	0.91	0.89	0.87	0.85
	3.00	1.01	0.98	0.95	0.98	0.95	0.93	0.95	0.93	0.91	0.92	0.90	0.89	0.86
	4.00	1.04	1.01	0.99	1.00	0.98	0.96	0.96	0.95	0.93	0.93	0.92	0.91	0.88
	5.00	1.05	1.03	1.01	1.01	1.00	0.98	0.98	0.96	0.95	0.94	0.93	0.92	0.89
数	7.00	1.07	1.05	1.04	1.03	1.01	1.00	0.99	0.98	0.97	0.95	0.94	0.94	0.91
	10.00	1.08	1.07	1.06	1.04	1.03	1.02	1.00	0.99	0.98	0.96	0.95	0.95	0.92