



配光特性

図番 MR150186

カタログ番号	X142AN
オプション番号	2700K Ra85
使用ランプ	XTM19802730CCA
ランプ光束	3000.0 lm 1,000
最大光度	8882.4 cd
1/2ビーム角	
A断面	24.00 °
C断面	
B断面	



X-series4.0 ADJUSTABLE	角度	光度
	0°	8882
	10°	5595
	20°	1557
	30°	482
	40°	38
	50°	9
	60°	1
	70°	0
	80°	0
	90°	1
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

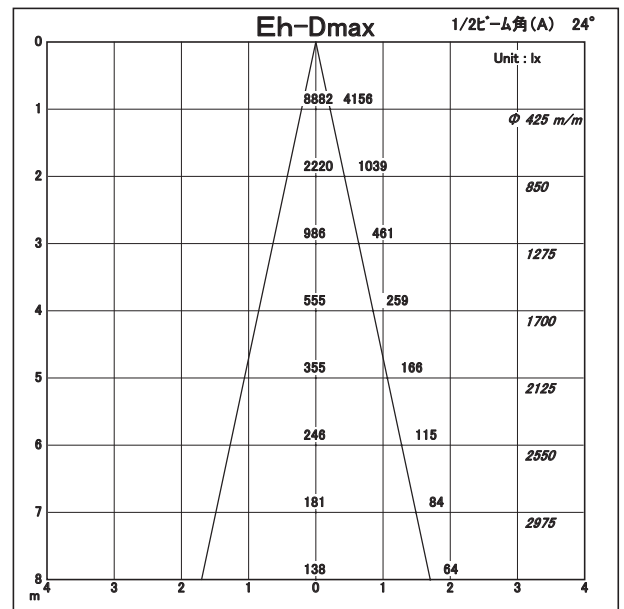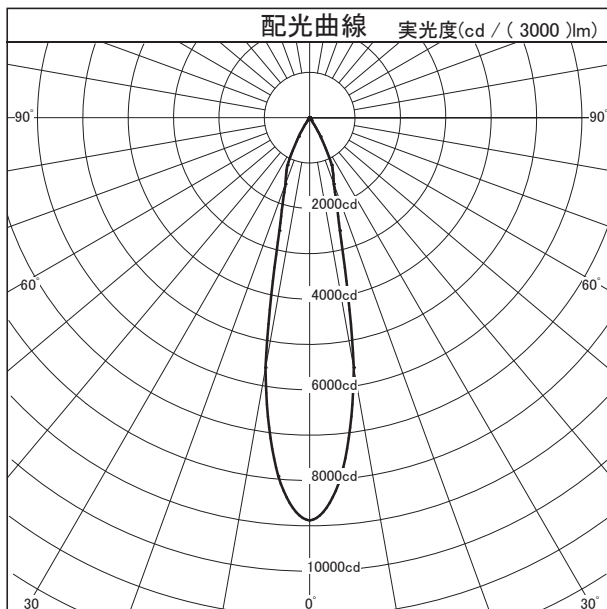

照 明 率 表													
平均照度=台数*照明率*保守率* 3000 (光束)/(間口*奥行)													
床面反射率(%)		20											
天井面反射率(%)		0											
壁面反射率(%)		0											
室	0.50	0.58	0.55	0.53	0.57	0.55	0.53	0.57	0.55	0.53	0.56	0.54	0.52
	0.70	0.63	0.60	0.58	0.62	0.60	0.58	0.61	0.59	0.58	0.61	0.59	0.57
	1.00	0.67	0.65	0.63	0.66	0.64	0.62	0.65	0.63	0.62	0.64	0.63	0.60
	1.25	0.70	0.67	0.65	0.68	0.66	0.64	0.67	0.65	0.64	0.66	0.64	0.62
	1.50	0.71	0.69	0.67	0.70	0.68	0.66	0.68	0.67	0.65	0.67	0.65	0.63
	2.00	0.74	0.71	0.70	0.72	0.70	0.68	0.70	0.68	0.67	0.68	0.67	0.65
	2.50	0.75	0.73	0.72	0.73	0.71	0.70	0.71	0.70	0.68	0.69	0.68	0.65
	3.00	0.76	0.74	0.73	0.74	0.72	0.71	0.71	0.70	0.69	0.69	0.69	0.66
	4.00	0.77	0.76	0.75	0.75	0.74	0.73	0.72	0.71	0.71	0.70	0.69	0.67
	5.00	0.78	0.77	0.76	0.75	0.74	0.74	0.73	0.72	0.71	0.70	0.70	0.67
指	7.00	0.79	0.78	0.77	0.76	0.75	0.75	0.73	0.73	0.72	0.71	0.70	0.68
	10.00	0.80	0.79	0.79	0.77	0.76	0.76	0.74	0.73	0.73	0.71	0.71	0.68