


# 配光特性

図番 MR150186





カタログ番号	X146AN		
オプション番号	2700K Ra95		
使用ランプ	XTM19952730CCA		
ランプ光束	3000.0	lm	1.000
最大光度	8882.4 cd		
1/2ビーム角			
A断面	24.00 °		
C断面			
B断面			

角度	光度
0°	8882
10°	5595
20°	1557
30°	482
40°	38
50°	9
60°	1
70°	0
80°	0
90°	1
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0



断面

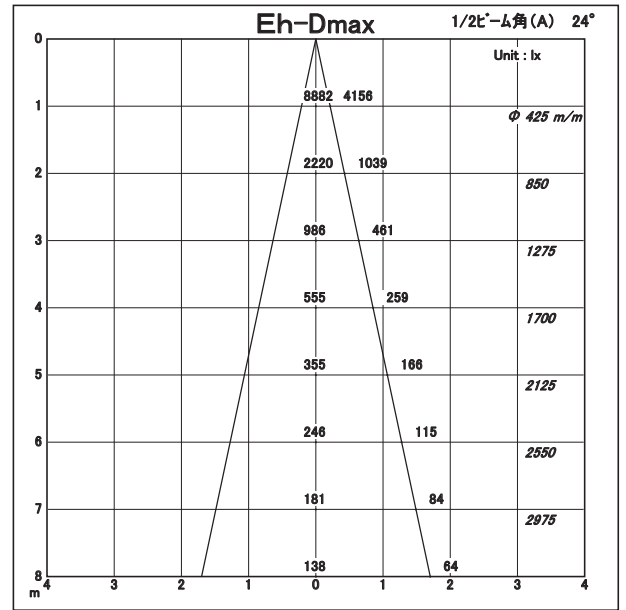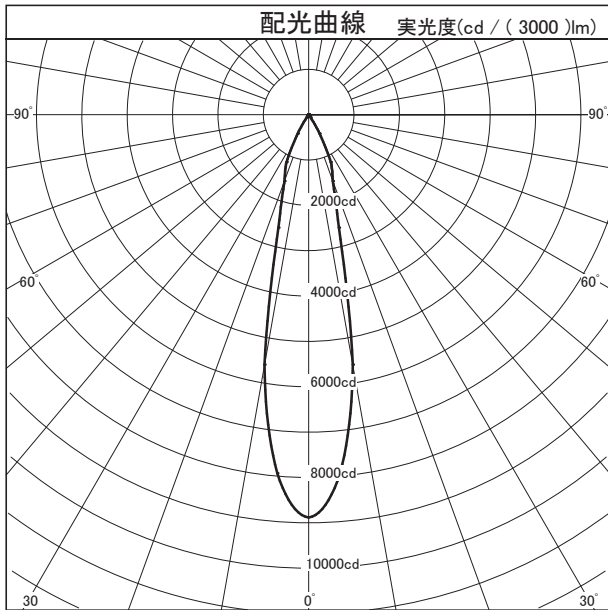

照明率表		平均照度=台数*照明率*保守率*3000(光束)/(間口*奥行)											
床面反射率(%)		20											
天井面反射率(%)		80			60			40			20		
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10
室	0.50	0.58	0.55	0.53	0.57	0.55	0.53	0.57	0.55	0.53	0.56	0.54	0.53
	0.70	0.63	0.60	0.58	0.62	0.60	0.58	0.61	0.59	0.58	0.61	0.59	0.58
	1.00	0.67	0.65	0.63	0.66	0.64	0.62	0.65	0.63	0.62	0.64	0.63	0.61
	1.25	0.70	0.67	0.65	0.68	0.66	0.64	0.67	0.65	0.64	0.66	0.64	0.63
	1.50	0.71	0.69	0.67	0.70	0.68	0.66	0.68	0.67	0.65	0.67	0.65	0.64
指	2.00	0.74	0.71	0.70	0.72	0.70	0.68	0.70	0.68	0.67	0.68	0.67	0.66
	2.50	0.75	0.73	0.72	0.73	0.71	0.70	0.71	0.70	0.68	0.69	0.68	0.67
	3.00	0.76	0.74	0.73	0.74	0.72	0.71	0.71	0.70	0.69	0.69	0.69	0.68
	4.00	0.77	0.76	0.75	0.75	0.74	0.73	0.72	0.71	0.71	0.70	0.69	0.69
	5.00	0.78	0.77	0.76	0.75	0.74	0.74	0.73	0.72	0.71	0.70	0.70	0.69
数	7.00	0.79	0.78	0.77	0.76	0.75	0.75	0.73	0.73	0.72	0.71	0.70	0.70
	10.00	0.80	0.79	0.79	0.77	0.76	0.76	0.74	0.73	0.73	0.71	0.71	0.71