



配光特性

図番 MR150187

カタログ番号	X147AN
オプション番号	2700K Ra95
使用ランプ	XTM19952730CCA
ランプ光束	3000.0 lm 1,000
最大光度	2988.8 cd
1/2ビーム角	
A断面	47.00 °
C断面	
B断面	



X-series4.0 ADJUSTABLE	角度	光度
	0°	2989
	10°	2704
	20°	1774
	30°	678
	40°	132
	50°	34
	60°	2
	70°	1
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

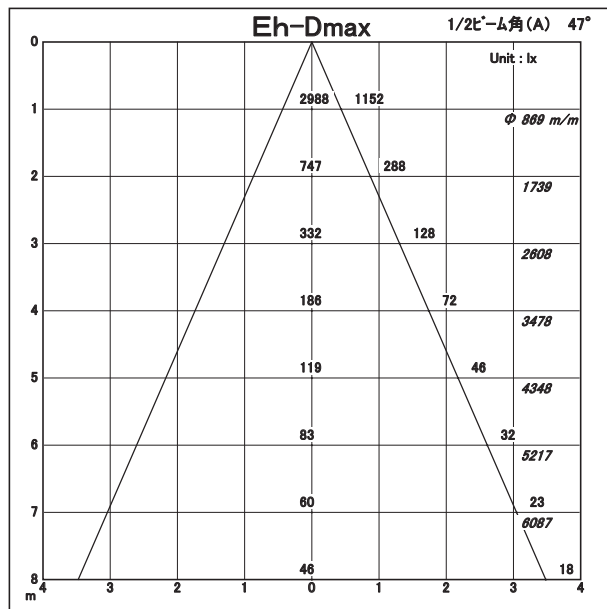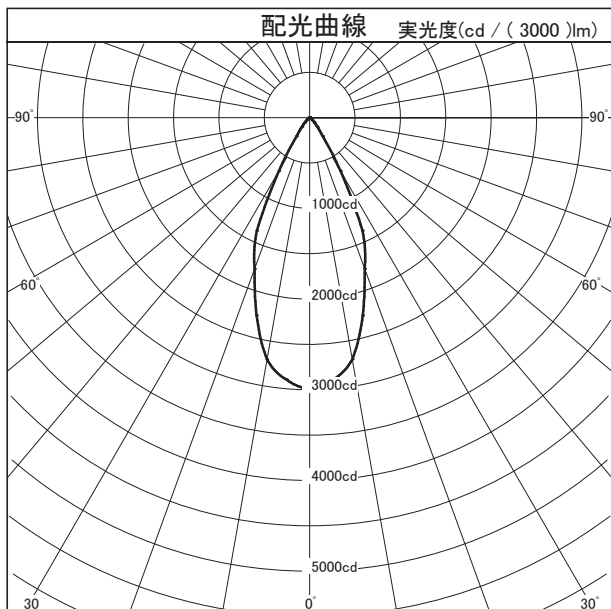

照 明 率 表													
平均照度=台数*照明率*保守率* 3000 (光束)/(間口*奥行)													
床面反射率(%)		20											
天井面反射率(%)		0											
壁面反射率(%)		0											
室	0.50	0.41	0.39	0.37	0.41	0.38	0.37	0.41	0.38	0.36	0.40	0.38	0.36
	0.70	0.48	0.45	0.43	0.47	0.44	0.43	0.46	0.44	0.42	0.46	0.44	0.42
	1.00	0.53	0.50	0.48	0.52	0.50	0.48	0.51	0.49	0.47	0.50	0.48	0.47
	1.25	0.56	0.53	0.51	0.54	0.52	0.51	0.53	0.51	0.50	0.52	0.51	0.49
	1.50	0.58	0.55	0.53	0.56	0.54	0.52	0.55	0.53	0.52	0.54	0.52	0.51
	2.00	0.60	0.58	0.56	0.58	0.57	0.55	0.57	0.55	0.54	0.55	0.54	0.53
	2.50	0.62	0.60	0.58	0.60	0.58	0.57	0.58	0.57	0.56	0.56	0.55	0.54
	3.00	0.63	0.61	0.60	0.61	0.59	0.58	0.59	0.58	0.57	0.57	0.56	0.55
	4.00	0.64	0.63	0.62	0.62	0.61	0.60	0.60	0.59	0.58	0.58	0.57	0.56
	5.00	0.65	0.64	0.63	0.63	0.62	0.61	0.60	0.60	0.59	0.58	0.58	0.57
指	7.00	0.66	0.65	0.64	0.64	0.63	0.62	0.61	0.61	0.60	0.59	0.59	0.58
	10.00	0.67	0.66	0.66	0.64	0.64	0.63	0.62	0.61	0.61	0.59	0.59	0.57