


配光特性

図番 MR150187





カタログ番号	X147BN		
オプション番号	3000K Ra95		
使用ランプ	XTM19953030CCA		
ランプ光束	3000.0	lm	1.000
最大光度	2988.8 cd		
1/2ビーム角			
A断面	47.00 °		
C断面			
B断面			

X-series4.0 ADJUSTABLE	角度	光度
	0°	2989
10°	2704	
20°	1774	
30°	678	
40°	132	
50°	34	
60°	2	
70°	1	
80°	0	
90°	0	
100°	0	
110°	0	
120°	0	
130°	0	
140°	0	
150°	0	
160°	0	
170°	0	
180°	0	



断面

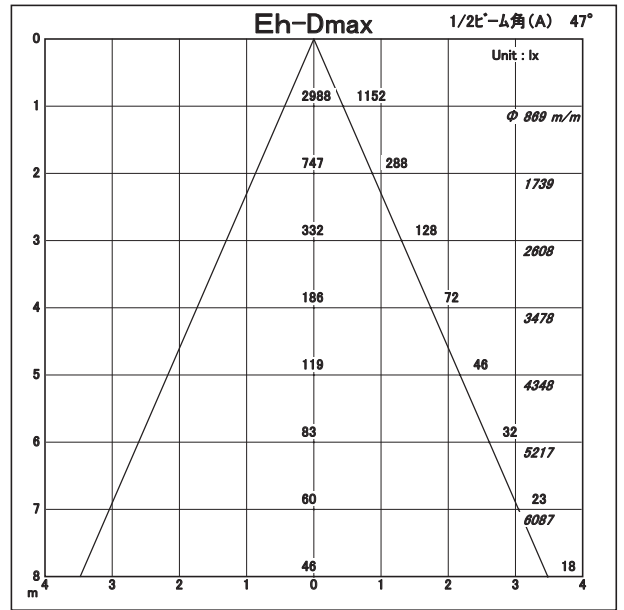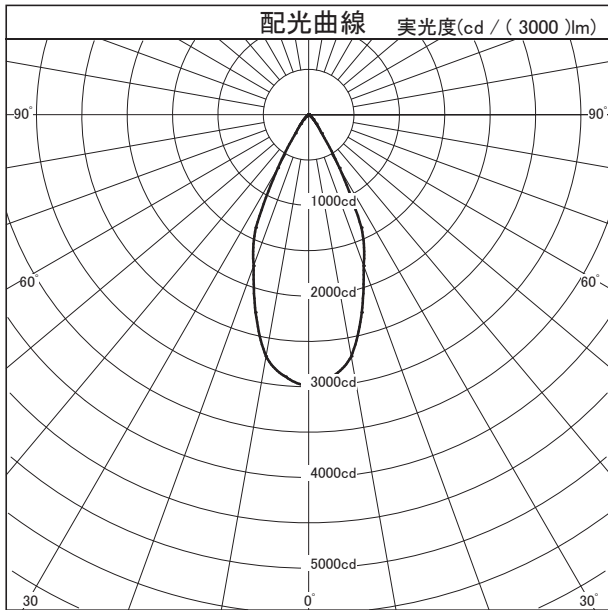

照明率表		平均照度=台数*照明率*保守率*3000(光束)/(間口*奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.41	0.39	0.37	0.41	0.38	0.37	0.41	0.38	0.36	0.40	0.38	0.36	0.36
	0.70	0.48	0.45	0.43	0.47	0.44	0.43	0.46	0.44	0.42	0.46	0.44	0.42	0.41
	1.00	0.53	0.50	0.48	0.52	0.50	0.48	0.51	0.49	0.47	0.50	0.48	0.47	0.46
	1.25	0.56	0.53	0.51	0.54	0.52	0.51	0.53	0.51	0.50	0.52	0.51	0.49	0.48
	1.50	0.58	0.55	0.53	0.56	0.54	0.52	0.55	0.53	0.52	0.54	0.52	0.51	0.50
指	2.00	0.60	0.58	0.56	0.58	0.57	0.55	0.57	0.55	0.54	0.55	0.54	0.53	0.52
	2.50	0.62	0.60	0.58	0.60	0.58	0.57	0.58	0.57	0.56	0.56	0.55	0.54	0.53
	3.00	0.63	0.61	0.60	0.61	0.59	0.58	0.59	0.58	0.57	0.57	0.56	0.55	0.54
	4.00	0.64	0.63	0.62	0.62	0.61	0.60	0.60	0.59	0.58	0.58	0.57	0.57	0.55
	5.00	0.65	0.64	0.63	0.63	0.62	0.61	0.60	0.60	0.59	0.58	0.58	0.57	0.56
数	7.00	0.66	0.65	0.64	0.64	0.63	0.62	0.61	0.61	0.60	0.59	0.59	0.58	0.56
	10.00	0.67	0.66	0.66	0.64	0.64	0.63	0.62	0.61	0.61	0.59	0.59	0.59	0.57