



配光特性

図番 MR140337



カタログ番号	J519CN
オプション番号	3500K Ra85
使用ランプ	BLM-1120-35853
ランプ光束	4100.0 lm 1,000
器具効率	71.9 %
下方効率	71.9 %
上方効率	0.0 %
最大取付間隔	
A断面	0.25 H
C断面	
B断面	

G.E.M. DL-FLOOD	角度	光度
	0°	17414
	10°	4823
	20°	1330
	30°	1194
	40°	800
	50°	5
	60°	1
	70°	1
	80°	2
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

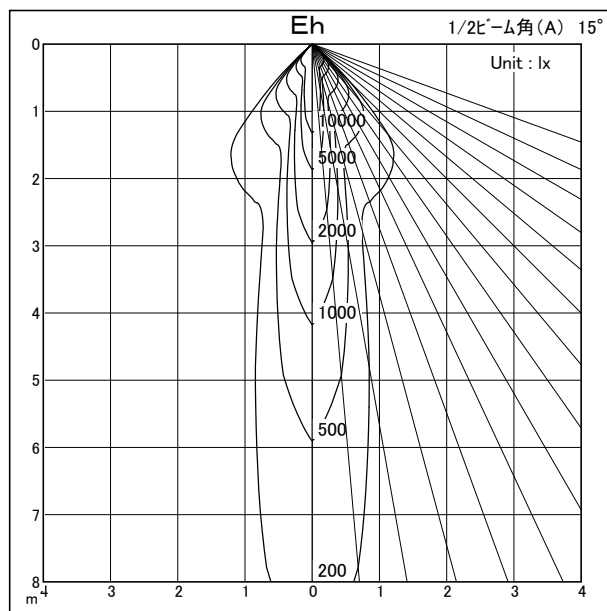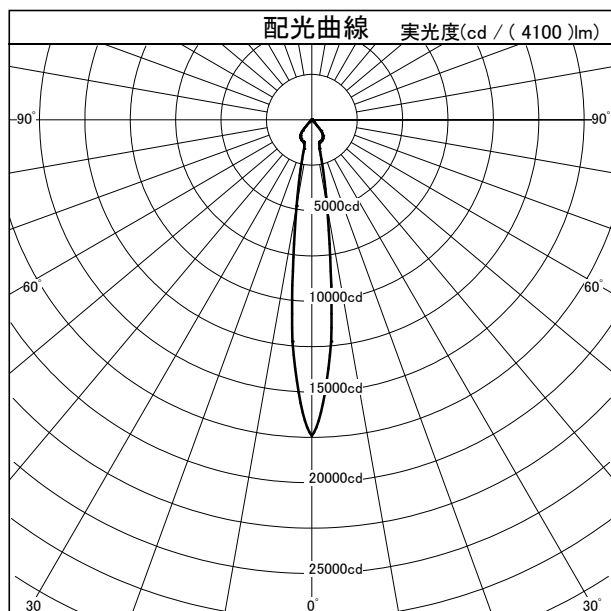

照 明 率 表		平均照度=台数×照明率×保守率×4100(光束)/(間口×奥行)											
床面反射率(%)		20											
天井面反射率(%)		0											
壁面反射率(%)		0											
室 指 数	0.50	0.52	0.49	0.47	0.52	0.49	0.47	0.51	0.49	0.46	0.51	0.48	0.46
	0.70	0.60	0.56	0.54	0.59	0.56	0.53	0.58	0.55	0.53	0.57	0.55	0.52
	1.00	0.66	0.63	0.60	0.65	0.62	0.60	0.64	0.61	0.59	0.63	0.60	0.58
	1.25	0.69	0.66	0.64	0.68	0.65	0.63	0.66	0.64	0.62	0.65	0.63	0.60
	1.50	0.72	0.69	0.66	0.70	0.67	0.65	0.68	0.66	0.64	0.67	0.65	0.62
	2.00	0.75	0.72	0.70	0.73	0.70	0.69	0.71	0.69	0.67	0.69	0.67	0.64
	2.50	0.77	0.74	0.72	0.74	0.72	0.71	0.72	0.70	0.69	0.70	0.69	0.66
	3.00	0.78	0.76	0.74	0.75	0.73	0.72	0.73	0.71	0.70	0.71	0.70	0.67
	4.00	0.80	0.78	0.76	0.77	0.75	0.74	0.74	0.73	0.72	0.72	0.71	0.68
	5.00	0.81	0.79	0.78	0.78	0.77	0.76	0.75	0.74	0.73	0.73	0.72	0.69
数	7.00	0.82	0.81	0.80	0.79	0.78	0.77	0.76	0.75	0.75	0.73	0.73	0.70
	10.00	0.83	0.82	0.82	0.80	0.79	0.78	0.77	0.76	0.76	0.74	0.73	0.70