

Luminaire

Code M326925

Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K SPOT CORNICE BIANCO / DEFL. BIANCO


Measurement

Code FTS1602725

Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K SPOT CORNICE BIANCO / DEFL. BIANCO

Luminaire Flux	992.20 lm	Luminaire Power	13.00 W	Efficacy	76.32 lm/W	Efficiency	100.00%
Lamps Flux	992.20 lm	Maximum value	3592.99 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm	
Horizontal Luminous Area	0.001963 m2		Emitting area on Plane 180°	0.000000 m2			
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°	0.000000 m2			
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°	0.000475 m2			
Coordinate system	CG		Symmetry Type	Rotosymmetrical			
Date	08-04-2015		Maximum Gamma Angle	90			
Measurement Distance	0.00		Measurement Flux	992.20 lm			
LED Flux=1330lm LED Power=13W Eff=74,6% EfcLed=102lm/W EfcLum=76lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	94 99 100 100 100		D DIN 5040	A60			
F UTE	1.00 A		B NBN	BZ 1			


80mm x 80mm



Semipiani C

180.0 — 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

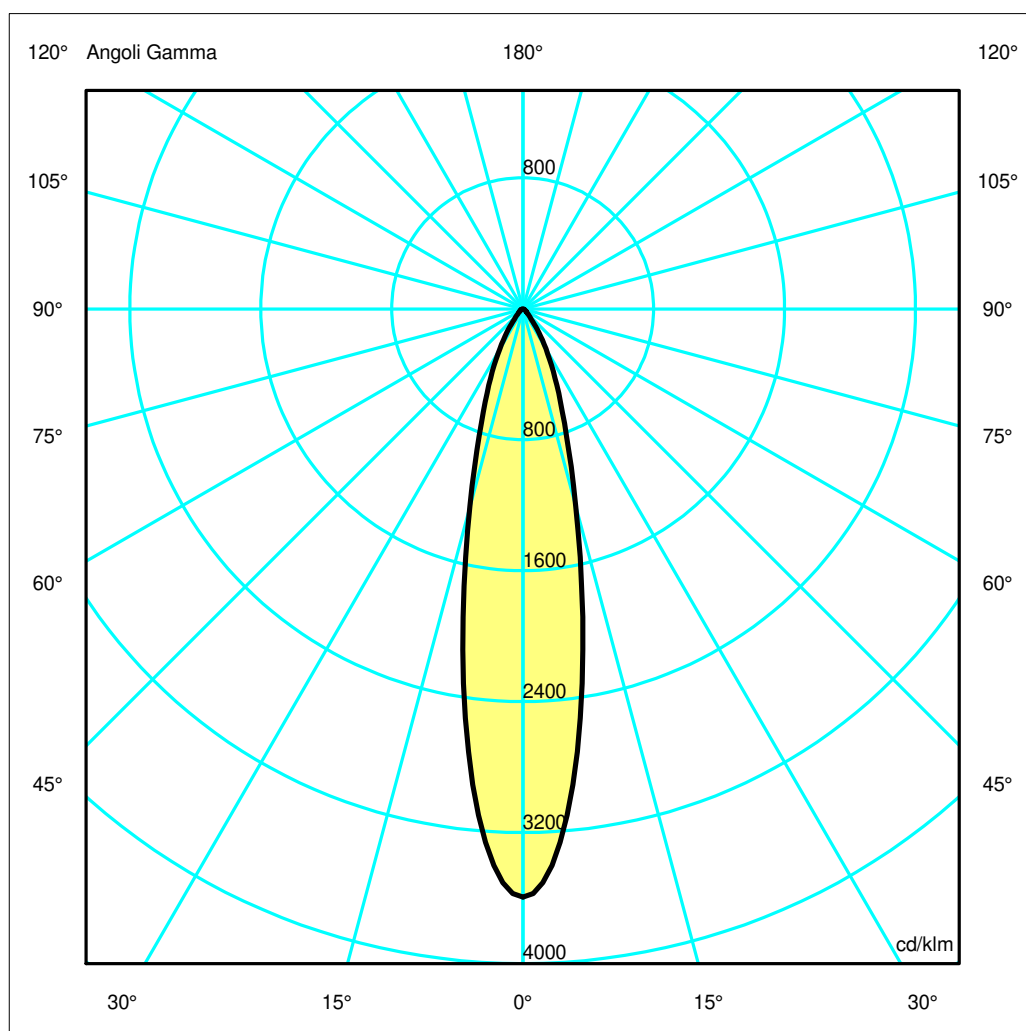

Luminaire

Code M326925

Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K SPOT CORNICE BIANCO / DEFL. BIANCO

Measurement

Code FTS1602725


Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K SPOT CORNICE BIANCO / DEFL. BIANCO

Luminaire Flux	992.20 lm	Luminaire Power	13.00 W	Efficacy	76.32 lm/W	Efficiency	100.00%
Lamps Flux	992.20 lm	Maximum value	3592.99 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		08-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		992.20 lm	
LED Flux=1330lm LED Power=13W Eff=74,6% EfcLed=102lm/W EfcLum=76lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	94 99 100 100 100			D DIN 5040		A60	
F UTE	1.00 A			B NBN		BZ 1	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.21	0.41	0.62	0.82	1.03	OC	0.21	0.41	0.62	0.82	1.03
OB	0.21	0.41	0.62	0.82	1.03	OD	0.21	0.41	0.62	0.82	1.03

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3564.97	3080.82	1242.65	462.62	153.16	43.16	21.56	10.85	2.95	0.00
OB	3564.97	3080.82	1242.65	462.62	153.16	43.16	21.56	10.85	2.95	0.00
OC	3564.97	3080.82	1242.65	462.62	153.16	43.16	21.56	10.85	2.95	0.00
OD	3564.97	3080.82	1242.65	462.62	153.16	43.16	21.56	10.85	2.95	0.00

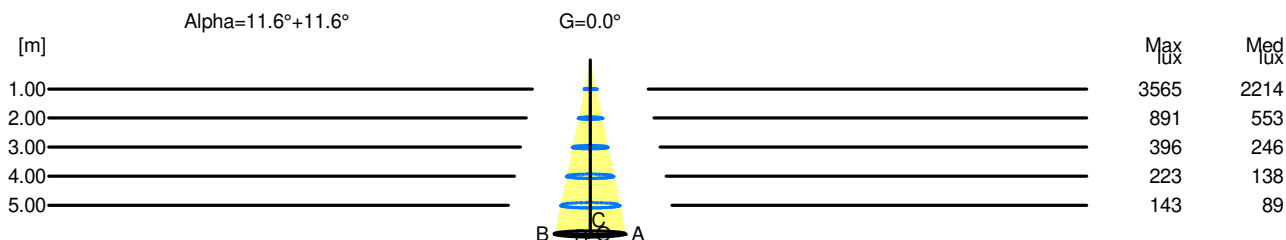

H[m]	D[m]	Max lux	Med lux	Alpha=11.6°+11.6°	G=0.0
1.00	0.41	3565	2214		
2.00	0.82	891	553		
3.00	1.24	396	246		
4.00	1.65	223	138		
5.00	2.06	143	89		