

**Luminaire**

Code M327325

Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K FLOOD CORNICE BIANCO / DEFL. NERO


**Measurement**

Code FTS1602735

Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K FLOOD CORNICE BIANCO / DEFL. NERO

|                                                                                                  |                 |                 |                             |                 |               |            |                 |
|--------------------------------------------------------------------------------------------------|-----------------|-----------------|-----------------------------|-----------------|---------------|------------|-----------------|
| Luminaire Flux                                                                                   | 809.97 lm       | Luminaire Power | 13.00 W                     | Efficacy        | 62.31 lm/W    | Efficiency | 100.00%         |
| Lamps Flux                                                                                       | 809.97 lm       | Maximum value   | 3301.84 cd/klm              | Position        | C=0.00 G=0.00 | CG         | Rotosymmetrical |
| Rectangular Luminaire<br>Round Luminous Area                                                     | Length<br>Diam. | 80 mm<br>50 mm  | Width<br>Height             | 80 mm<br>0 mm   | Height        | 115 mm     |                 |
| Horizontal Luminous Area                                                                         | 0.001963 m2     |                 | Emitting area on Plane 180° | 0.000000 m2     |               |            |                 |
| Emitting area on Plane 0°                                                                        | 0.000000 m2     |                 | Emitting area on Plane 270° | 0.000000 m2     |               |            |                 |
| Emitting area on Plane 90°                                                                       | 0.000000 m2     |                 | Glare area at 76°           | 0.000475 m2     |               |            |                 |
| Coordinate system                                                                                | CG              |                 | Symmetry Type               | Rotosymmetrical |               |            |                 |
| Date                                                                                             | 30-06-2015      |                 | Maximum Gamma Angle         | 90              |               |            |                 |
| Measurement Distance                                                                             | 0.00            |                 | Measurement Flux            | 809.97 lm       |               |            |                 |
| LED Flux=1330lm LED Power=13W Eff=60,9% EfcLed=102lm/W EfcLum=62lm/W Ra=90 SDCM=3 L70(6K)=50000h |                 |                 |                             |                 |               |            |                 |
| C.I.E.                                                                                           | 99              | 100             | 100                         | 100             | 100           | D DIN 5040 | A60             |
| F UTE                                                                                            | --              |                 |                             |                 |               | B NBN      | BZ 1            |

80mm x 80mm




Semipiani C

180.0 — 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

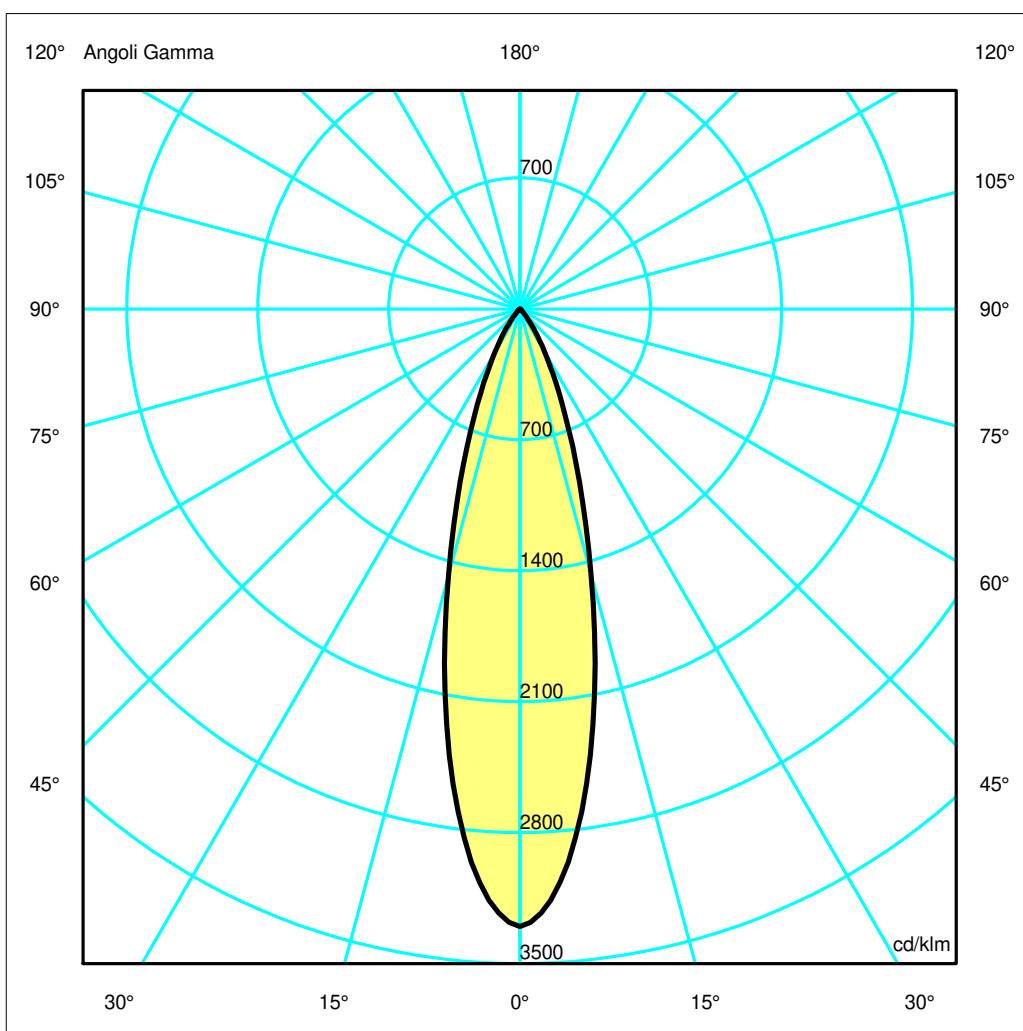

## Luminaire

Code M327325

Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K FLOOD CORNICE BIANCO / DEFL. NERO

## Measurement

Code FTS1602735


Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K FLOOD CORNICE BIANCO / DEFL. NERO

|                                                                                                  |                          |                 |                |                             |               |                 |                 |
|--------------------------------------------------------------------------------------------------|--------------------------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux                                                                                   | 809.97 lm                | Luminaire Power | 13.00 W        | Efficacy                    | 62.31 lm/W    | Efficiency      | 100.00%         |
| Lamps Flux                                                                                       | 809.97 lm                | Maximum value   | 3301.84 cd/klm | Position                    | C=0.00 G=0.00 | CG              | Rotosymmetrical |
| Rectangular Luminaire<br>Round Luminous Area                                                     |                          | Length<br>Diam. | 80 mm<br>50 mm | Width<br>Height             | 80 mm<br>0 mm | Height          | 115 mm          |
| Horizontal Luminous Area                                                                         |                          | 0.001963 m2     |                | Emitting area on Plane 180° |               | 0.000000 m2     |                 |
| Emitting area on Plane 0°                                                                        |                          | 0.000000 m2     |                | Emitting area on Plane 270° |               | 0.000000 m2     |                 |
| Emitting area on Plane 90°                                                                       |                          | 0.000000 m2     |                | Glare area at 76°           |               | 0.000475 m2     |                 |
| Coordinate system                                                                                |                          | CG              |                | Symmetry Type               |               | Rotosymmetrical |                 |
| Date                                                                                             |                          | 30-06-2015      |                | Maximum Gamma Angle         |               | 90              |                 |
| Measurement Distance                                                                             |                          | 0.00            |                | Measurement Flux            |               | 809.97 lm       |                 |
| LED Flux=1330lm LED Power=13W Eff=60,9% EfcLed=102lm/W EfcLum=62lm/W Ra=90 SDCM=3 L70(6K)=50000h |                          |                 |                |                             |               |                 |                 |
| C.I.E.<br>F UTE                                                                                  | 99 100 100 100 100<br>-- |                 |                | D DIN 5040<br>B NBN         | A60<br>BZ 1   |                 |                 |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA   | 0.25 | 0.49 | 0.74 | 0.98 | 1.23 | OC   | 0.25 | 0.49 | 0.74 | 0.98 | 1.23 |
| OB   | 0.25 | 0.49 | 0.74 | 0.98 | 1.23 | OD   | 0.25 | 0.49 | 0.74 | 0.98 | 1.23 |

|    | Luminous Intensities [ cd/klm] |         |         |        |       |       |      |      |      |      |
|----|--------------------------------|---------|---------|--------|-------|-------|------|------|------|------|
|    | 0                              | 5       | 15      | 25     | 35    | 45    | 55   | 65   | 75   | 85   |
| OA | 2674.40                        | 2404.14 | 1192.03 | 400.01 | 99.77 | 14.01 | 2.54 | 0.58 | 0.33 | 0.12 |
| OB | 2674.40                        | 2404.14 | 1192.03 | 400.01 | 99.77 | 14.01 | 2.54 | 0.58 | 0.33 | 0.12 |
| OC | 2674.40                        | 2404.14 | 1192.03 | 400.01 | 99.77 | 14.01 | 2.54 | 0.58 | 0.33 | 0.12 |
| OD | 2674.40                        | 2404.14 | 1192.03 | 400.01 | 99.77 | 14.01 | 2.54 | 0.58 | 0.33 | 0.12 |

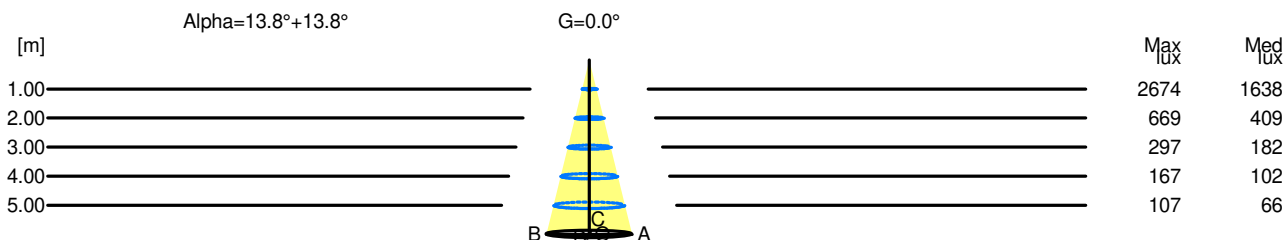

| H[m] | D[m] | Max lux | Med lux | Alpha=13.8°+13.8° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.49 | 2674    | 1638    |                   |       |
| 2.00 | 0.98 | 669     | 409     |                   |       |
| 3.00 | 1.47 | 297     | 182     |                   |       |
| 4.00 | 1.97 | 167     | 102     |                   |       |
| 5.00 | 2.46 | 107     | 66      |                   |       |