

Luminaire

Code M273825
 Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. METALLIZZATO

Measurem.

Code FTS1602228
 Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. METALLIZZATO


| | | | | | | | |
|---|---|---|---|---------------|---------------|------------|-----------------|
| Luminaire Flux | 1018.87 lm | Luminaire Power | 13.00 W | Efficacy | 78.37 lm/W | Efficiency | 100.00% |
| Lamps Flux | 1018.87 lm | Maximum value | 2741.50 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Rectangular Luminaire Round Luminous Area | Length Diam. | 80 mm 50 mm | Width Height | 80 mm 0 mm | Height | 115 mm | |
| Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90° | 0.001963 m2 0.000000 m2 0.000000 m2 | Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76° | 0.000000 m2 0.000000 m2 0.000475 m2 | | | | |
| Coordinate system Date Measurement Distance | CG 09-04-2015 0.00 | Symmetry Type Maximum Gamma Angle Measurement Flux | Rotosymmetrical 90 1018.87 lm | | | | |

LED Flux=1390lm LED Power=13W Eff=73,3% EfcLed=107lm/W EfcLum=78lm/W Ra=90 SDCM=3 L70(6K)=50000h

C.I.E. 97 100 100 100 100
 F UTE --

D DIN 5040
 B NBN
 A60
 BZ 1


80mm x 80mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

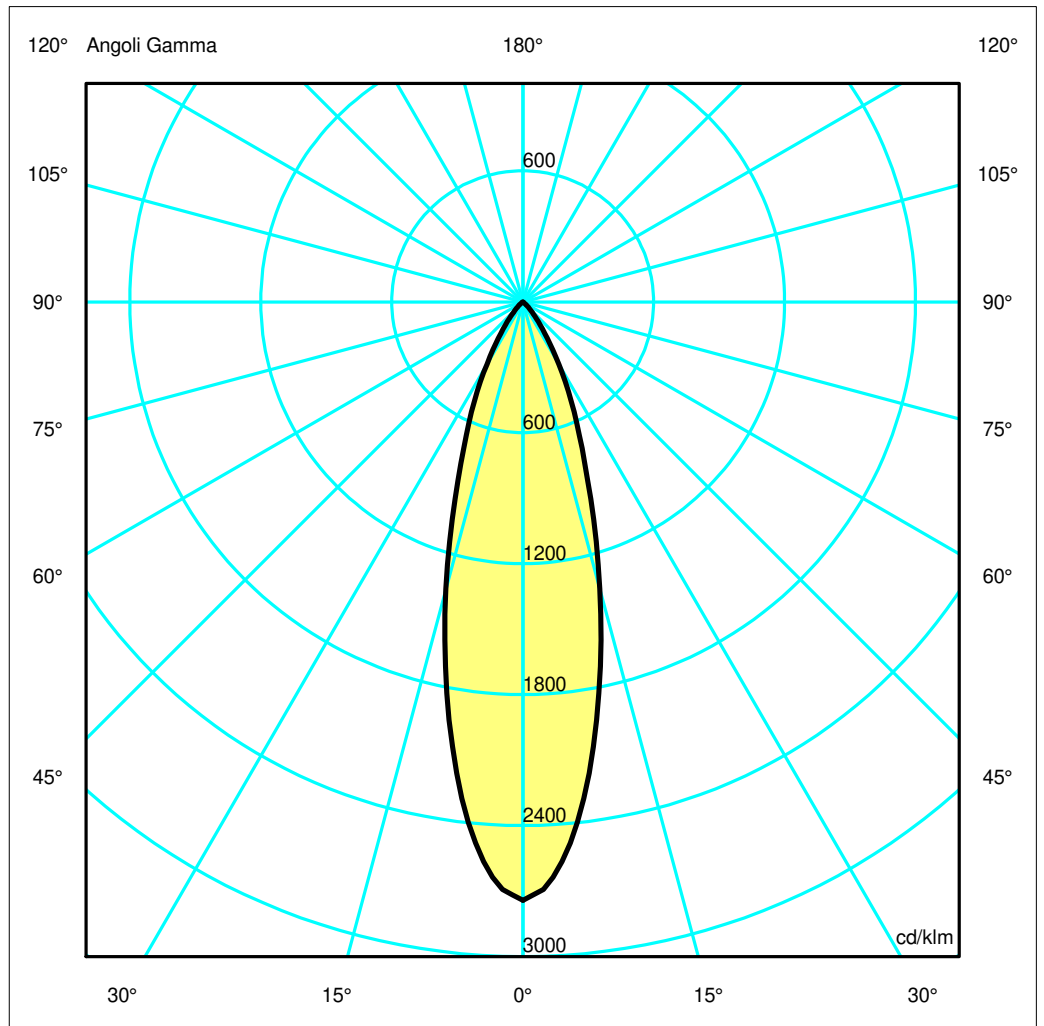

Luminaire

Code M273825
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. METALLIZZATO

Measurement


Code FTS1602228
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. METALLIZZATO

| | | | | | | | |
|--|------------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 1018.87 lm | Luminaire Power | 13.00 W | Efficacy | 78.37 lm/W | Efficiency | 100.00% |
| Lamps Flux | 1018.87 lm | Maximum value | 2741.50 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Rectangular Luminaire Round Luminous Area | | Length Diam. | 80 mm 50 mm | Width Height | 80 mm 0 mm | Height | 115 mm |
| Horizontal Luminous Area | | 0.001963 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000475 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 09-04-2015 | | Maximum Gamma Angle | | 90 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 1018.87 lm | |
| LED Flux=1390lm LED Power=13W Eff=73,3% EfcLed=107lm/W EfcLum=78lm/W Ra=90 SDCM=3 L70(6K)=50000h | | | | | | | |
| C.I.E. | 97 | 100 | 100 | 100 | 100 | D DIN 5040 | A60 |
| F UTE | -- | | | | | B NBN | BZ 1 |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA | 0.27 | 0.53 | 0.80 | 1.07 | 1.33 | OC | 0.27 | 0.53 | 0.80 | 1.07 | 1.33 |
| OB | 0.27 | 0.53 | 0.80 | 1.07 | 1.33 | OD | 0.27 | 0.53 | 0.80 | 1.07 | 1.33 |

| | Luminous Intensities [cd/klm] | | | | | | | | | |
|----|--------------------------------|---------|---------|--------|--------|-------|------|------|------|------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 2793.23 | 2535.99 | 1387.52 | 566.94 | 179.18 | 41.33 | 1.28 | 0.00 | 0.00 | 0.00 |
| OB | 2793.23 | 2535.99 | 1387.52 | 566.94 | 179.18 | 41.33 | 1.28 | 0.00 | 0.00 | 0.00 |
| OC | 2793.23 | 2535.99 | 1387.52 | 566.94 | 179.18 | 41.33 | 1.28 | 0.00 | 0.00 | 0.00 |
| OD | 2793.23 | 2535.99 | 1387.52 | 566.94 | 179.18 | 41.33 | 1.28 | 0.00 | 0.00 | 0.00 |

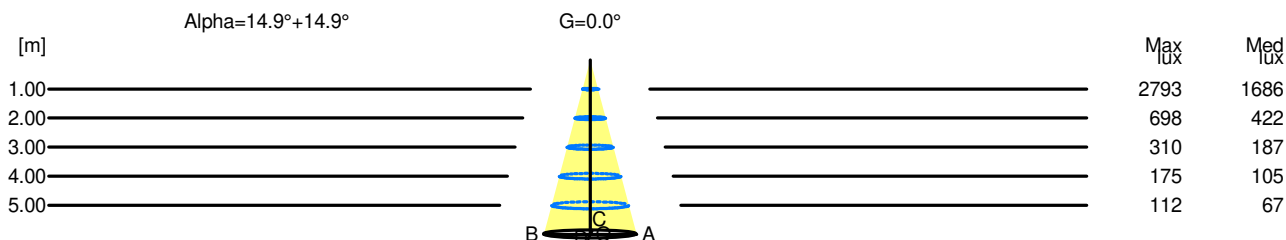

| H[m] | D[m] | Max lux | Med lux | Alpha=14.9°+14.9° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.53 | 2793 | 1686 | | |
| 2.00 | 1.07 | 698 | 422 | | |
| 3.00 | 1.60 | 310 | 187 | | |
| 4.00 | 2.13 | 175 | 105 | | |
| 5.00 | 2.66 | 112 | 67 | | |