

Luminaire

Code AF05001+AF95104

Name SHARP RECESSED TRIM 2X 6W 927 FLOOD WHITE EXT.DRV + SCREEN 2X BLACK


Measurem.

Code FTS1603137

Name SHARP RECESSED TRIM 2X 6W 927 FLOOD WHITE EXT.DRV + SCREEN 2X BLACK

Luminaire Flux	371.24 lm	Luminaire Power	6.00 W	Efficacy	61.87 lm/W	Efficiency	100.00%
Lamps Flux	371.24 lm	Maximum value	5604.42 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	74 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	72 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.002664 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000644 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		371.24 lm	
LED Flux=498,1lm LED Power=6W Eff=75% EfcLed=83lm/W EfcLum=62lm/W CCT=2700K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	100	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

74mm x 40mm




Semipiani C

180.0 — 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

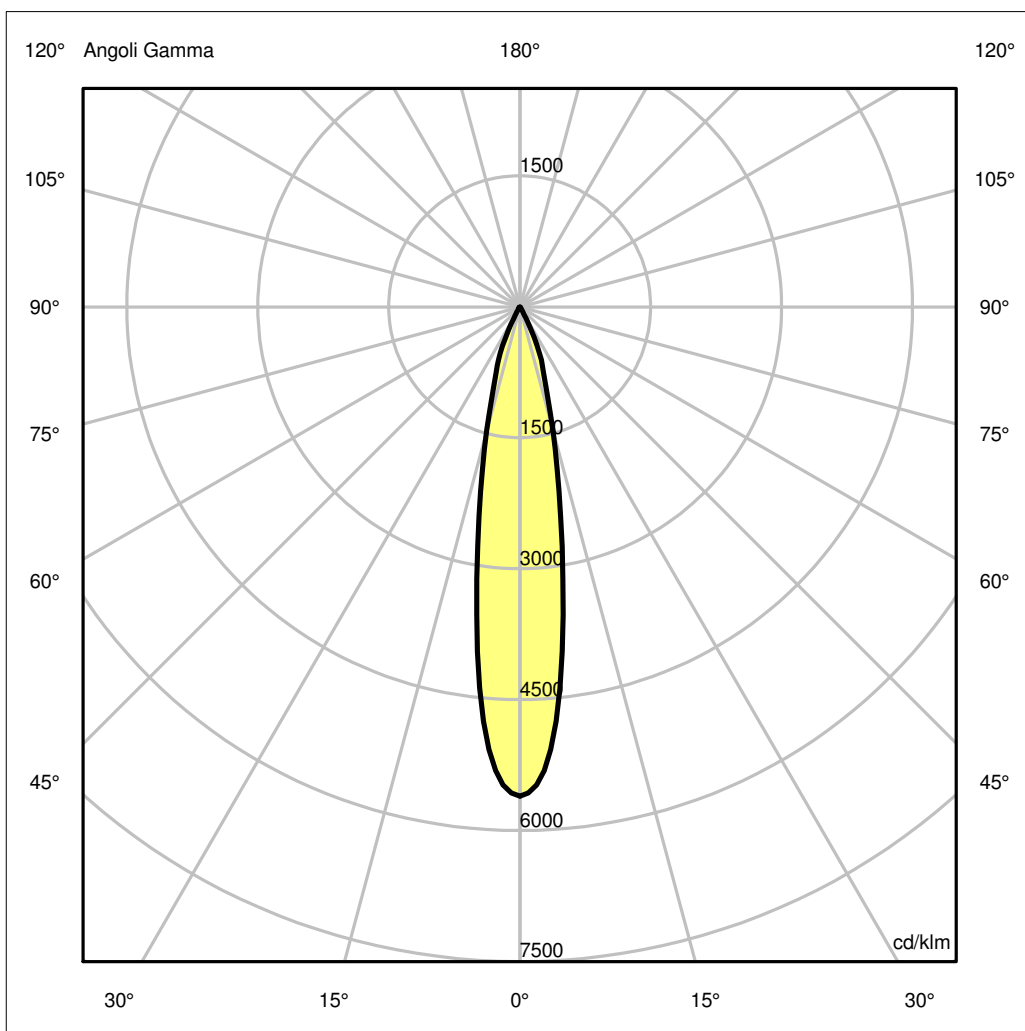

Luminaire

Code AF05001+AF95104

Name SHARP RECESSED TRIM 2X 6W 927 FLOOD WHITE EXT.DRV + SCREEN 2X BLACK

Measurem.

Code FTS1603137


Name SHARP RECESSED TRIM 2X 6W 927 FLOOD WHITE EXT.DRV + SCREEN 2X BLACK

Luminaire Flux	371.24 lm	Luminaire Power	6.00 W	Efficacy	61.87 lm/W	Efficiency	100.00%
Lamps Flux	371.24 lm	Maximum value	5604.42 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	74 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	72 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.002664 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000644 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		371.24 lm	
LED Flux=498,1lm LED Power=6W Eff=75% EfcLed=83lm/W EfcLum=62lm/W CCT=2700K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	100	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.18	0.35	0.53	0.70	0.88	OC	0.18	0.35	0.53	0.70	0.88
OB	0.18	0.35	0.53	0.70	0.88	OD	0.18	0.35	0.53	0.70	0.88

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2080.59	1769.20	543.20	145.30	8.60	1.82	0.23	0.00	0.00	0.00
OB	2080.59	1769.20	543.20	145.30	8.60	1.82	0.23	0.00	0.00	0.00
OC	2080.59	1769.20	543.20	145.30	8.60	1.82	0.23	0.00	0.00	0.00
OD	2080.59	1769.20	543.20	145.30	8.60	1.82	0.23	0.00	0.00	0.00

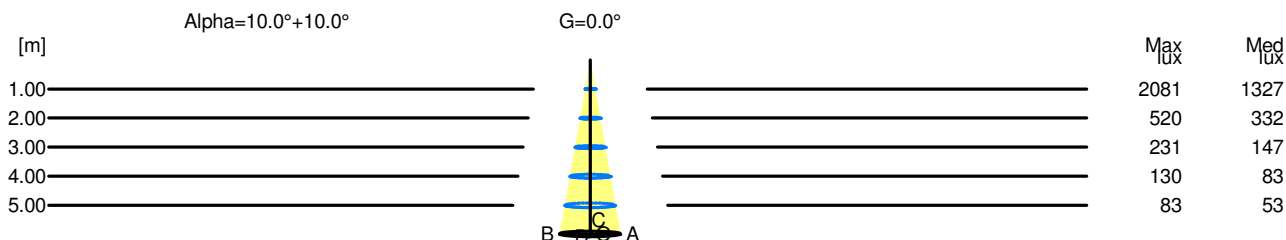

H[m]	D[m]	Max lux	Med lux	Alpha=10.0°+10.0°	G=0.0
1.00	0.35	2081	1327		
2.00	0.70	520	332		
3.00	1.05	231	147		
4.00	1.40	130	83		
5.00	1.75	83	53		