

Luminaire

Code AF10301+AF95204

Name SHARP RECESSED TRIM 4X 12W 930 FLOOD WHITE EXT.DRV + SCREEN 4X BLACK


Measurem.

Code FTS1603149

Name SHARP RECESSED TRIM 4X 12W 930 FLOOD WHITE EXT.DRV + SCREEN 4X BLACK

Luminaire Flux	790.99 lm	Luminaire Power	11.00 W	Efficacy	71.91 lm/W	Efficiency	100.00%
Lamps Flux	790.99 lm	Maximum value	5604.42 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	150 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	148 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.005476 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001325 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		790.99 lm	
LED Flux=1061,32lm LED Power=11W Eff=75% EfcLed=96lm/W EfcLum=72lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	100	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

150mm x 40mm




Semipiani C

180.0 — 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

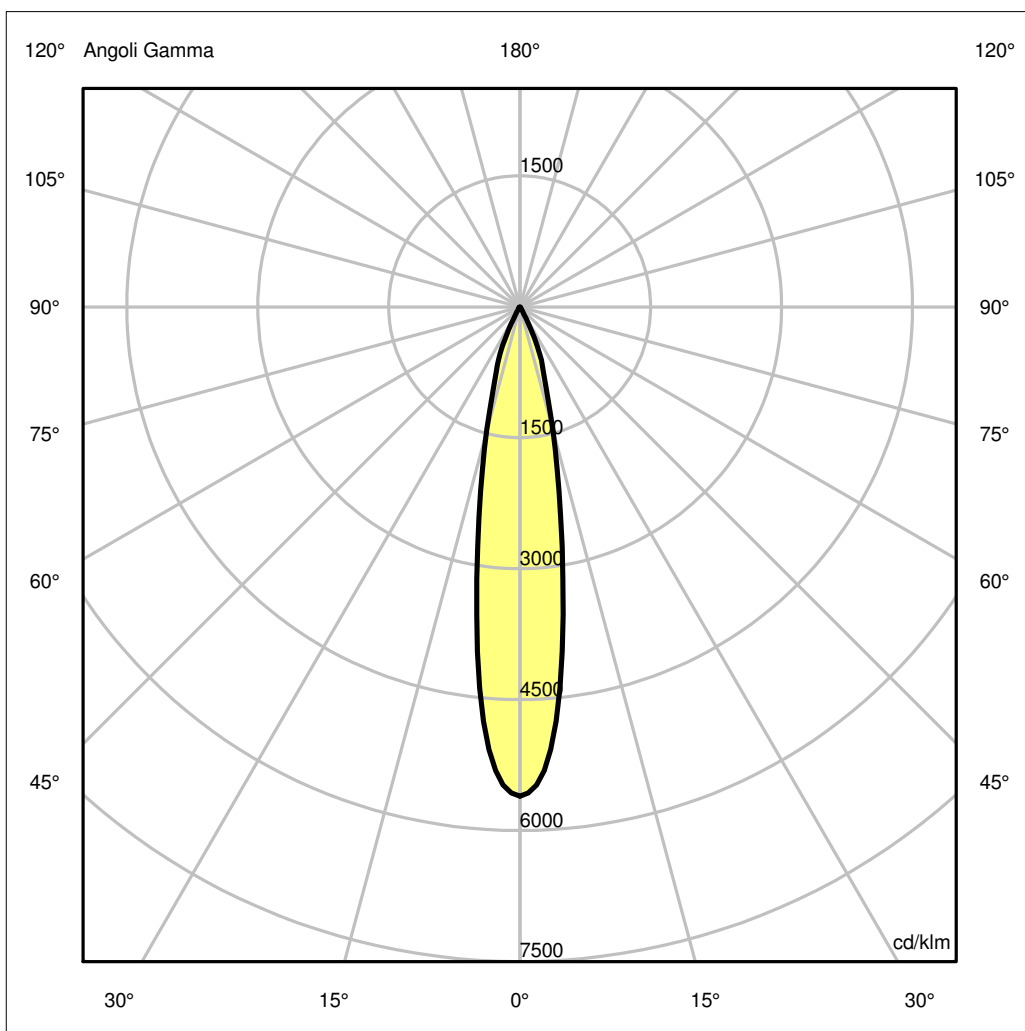

Luminaire

Code AF10301+AF95204

Name SHARP RECESSED TRIM 4X 12W 930 FLOOD WHITE EXT.DRV + SCREEN 4X BLACK

Measurem.

Code FTS1603149


Name SHARP RECESSED TRIM 4X 12W 930 FLOOD WHITE EXT.DRV + SCREEN 4X BLACK

Luminaire Flux	790.99 lm	Luminaire Power	11.00 W	Efficacy	71.91 lm/W	Efficiency	100.00%
Lamps Flux	790.99 lm	Maximum value	5604.42 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	150 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	148 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.005476 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001325 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		790.99 lm	
LED Flux=1061,32lm LED Power=11W Eff=75% EfcLed=96lm/W EfcLum=72lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	100	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.18	0.35	0.53	0.70	0.88	OC	0.18	0.35	0.53	0.70	0.88
OB	0.18	0.35	0.53	0.70	0.88	OD	0.18	0.35	0.53	0.70	0.88

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4433.04	3769.58	1157.38	309.60	18.33	3.88	0.49	0.00	0.00	0.00
OB	4433.04	3769.58	1157.38	309.60	18.33	3.88	0.49	0.00	0.00	0.00
OC	4433.04	3769.58	1157.38	309.60	18.33	3.88	0.49	0.00	0.00	0.00
OD	4433.04	3769.58	1157.38	309.60	18.33	3.88	0.49	0.00	0.00	0.00

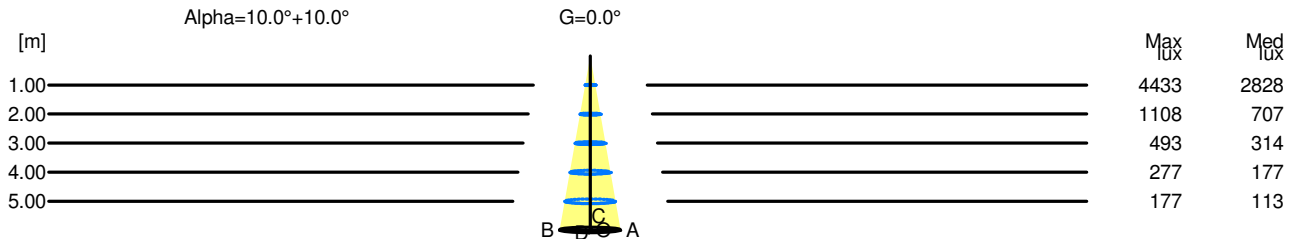

H[m]	D[m]	Max lux	Med lux	Alpha=10.0°+10.0°	G=0.0
1.00	0.35	4433	2828		
2.00	0.70	1108	707		
3.00	1.05	493	314		
4.00	1.40	277	177		
5.00	1.75	177	113		