



配光特性

図番 MOLTO LUCE

カタログ番号	J-625W
オプション番号	3000K Ra90
使用ランプ	LED 9W
ランプ光束	430.0 lm 1,000
最大光度	1517.9 cd
1/2ビーム角	
A断面	33.00 °
C断面	
B断面	



BLIND SPOT 30deg	角度	光度
	0°	1518
	10°	1278
	20°	422
	30°	15
	40°	0
	50°	0
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

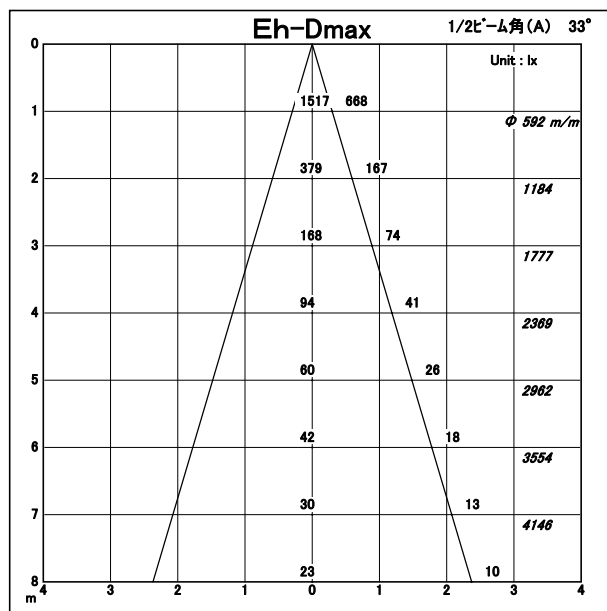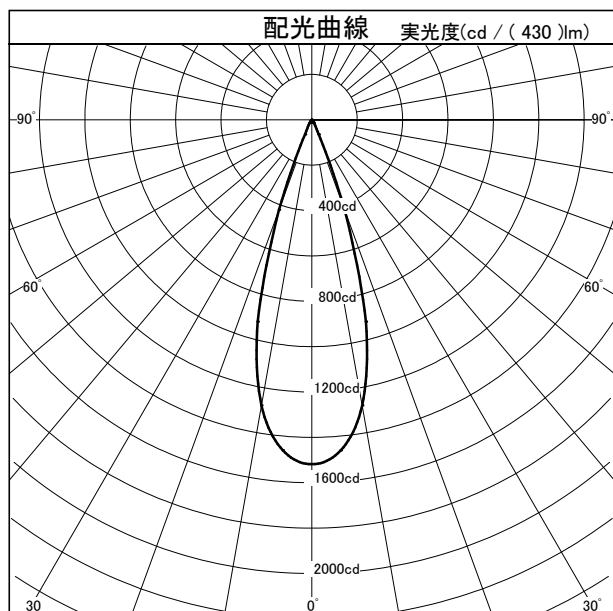

照 明 率 表		平均照度=台数 * 照明率 * 保守率 * 430 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.89	0.86	0.83	0.88	0.85	0.83	0.88	0.85	0.83	0.87	0.85	0.83	0.82
	0.70	0.95	0.92	0.89	0.94	0.91	0.89	0.93	0.91	0.89	0.92	0.90	0.88	0.87
	1.00	1.01	0.97	0.95	0.99	0.96	0.94	0.98	0.95	0.93	0.96	0.94	0.93	0.91
	1.25	1.04	1.01	0.98	1.02	0.99	0.97	1.00	0.98	0.96	0.98	0.96	0.95	0.93
	1.50	1.06	1.03	1.00	1.04	1.01	0.99	1.01	0.99	0.98	0.99	0.98	0.96	0.95
指	2.00	1.09	1.06	1.04	1.06	1.04	1.02	1.03	1.02	1.00	1.01	0.99	0.98	0.96
	2.50	1.11	1.08	1.06	1.07	1.05	1.04	1.05	1.03	1.02	1.02	1.01	0.99	0.97
	3.00	1.12	1.10	1.08	1.09	1.07	1.05	1.05	1.04	1.03	1.02	1.01	1.00	0.98
	4.00	1.14	1.12	1.10	1.10	1.08	1.07	1.06	1.05	1.04	1.03	1.02	1.01	0.99
	5.00	1.15	1.13	1.12	1.11	1.10	1.08	1.07	1.06	1.05	1.04	1.03	1.02	0.99
数	7.00	1.16	1.15	1.14	1.12	1.11	1.10	1.08	1.07	1.06	1.04	1.03	1.03	1.00
	10.00	1.17	1.17	1.16	1.13	1.12	1.11	1.08	1.08	1.07	1.04	1.04	1.04	1.00