



配光特性

図番 19.12.2017



カタログ番号	J-614W
オプション番号	3000K 15°
使用ランプ	LED 17W
ランプ光束	1530.0 lm 1,000
器具効率	100.0 %
下方効率	99.9 %
上方効率	0.1 %
最大取付間隔	
A断面	0.27 H
C断面	0.27 H
B断面	0.29 H

RIDE LENS RECESSED	角度	光度
	0°	14897
	10°	4642
	20°	396
	30°	37
	40°	5
	50°	3
	60°	2
	70°	3
	80°	2
	90°	1
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

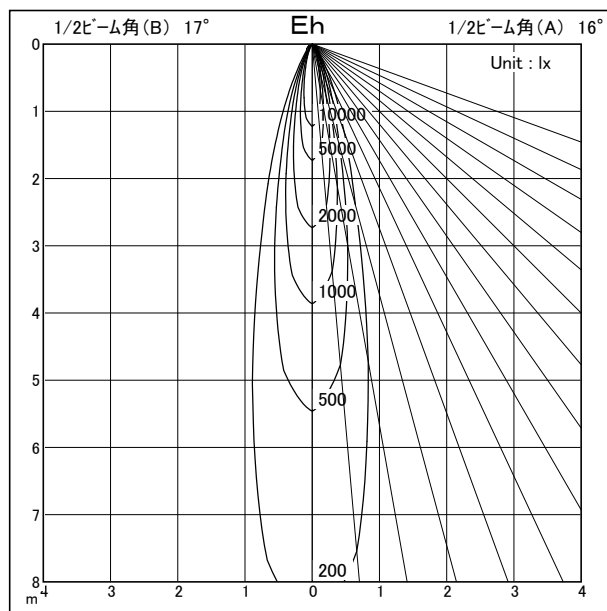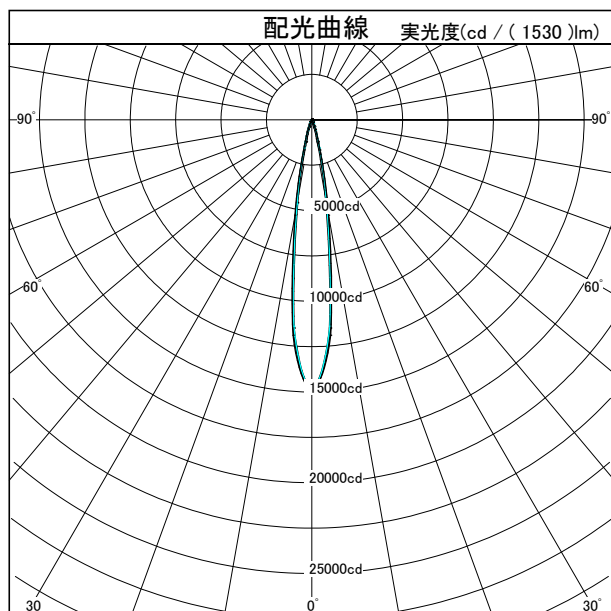

照 明 率 表		平均照度=台数 * 照明率 * 保守率 * 1530 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.94	0.92	0.90	0.94	0.91	0.90	0.93	0.91	0.90	0.93	0.91	0.89	0.89
	0.70	0.98	0.95	0.93	0.97	0.95	0.93	0.96	0.94	0.93	0.96	0.94	0.92	0.91
	1.00	1.02	0.99	0.97	1.01	0.98	0.96	0.99	0.97	0.95	0.98	0.96	0.95	0.93
	1.25	1.04	1.01	0.99	1.02	1.00	0.98	1.00	0.99	0.97	0.99	0.97	0.96	0.94
	1.50	1.06	1.03	1.01	1.04	1.01	0.99	1.01	1.00	0.98	1.00	0.98	0.97	0.95
指	2.00	1.08	1.06	1.04	1.05	1.03	1.02	1.03	1.01	1.00	1.00	0.99	0.98	0.96
	2.50	1.10	1.07	1.05	1.06	1.05	1.03	1.04	1.02	1.01	1.01	1.00	0.99	0.97
	3.00	1.11	1.09	1.07	1.07	1.06	1.04	1.04	1.03	1.02	1.01	1.00	0.99	0.97
	4.00	1.12	1.10	1.09	1.08	1.07	1.06	1.05	1.04	1.03	1.02	1.01	1.00	0.97
	5.00	1.13	1.12	1.10	1.09	1.08	1.07	1.05	1.05	1.04	1.02	1.01	1.01	0.98
数	7.00	1.14	1.13	1.12	1.10	1.09	1.08	1.06	1.05	1.05	1.02	1.02	1.01	0.98
	10.00	1.15	1.14	1.14	1.11	1.10	1.09	1.06	1.06	1.05	1.03	1.02	1.02	0.98