
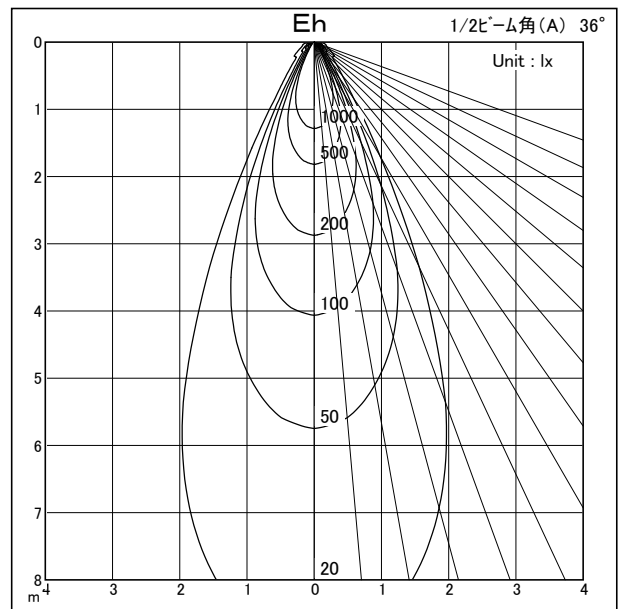
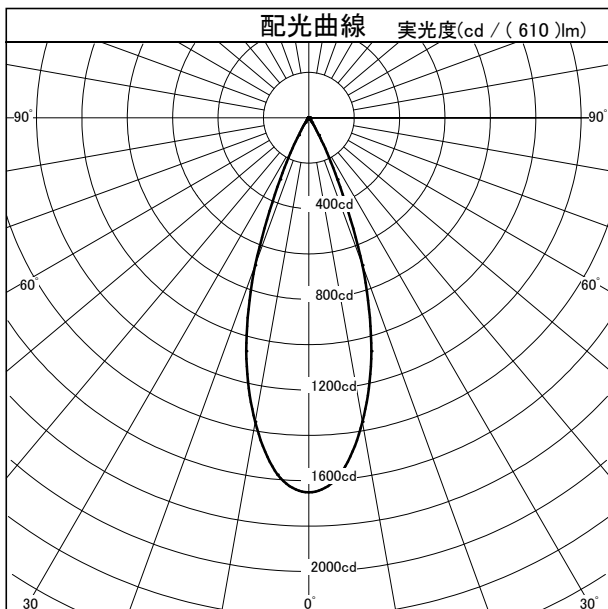




カタログ番号	L1018B		
オプション番号	3000K Medium		
使用ランプ	LED 6W		
ランプ光束	610.0	lm	1,000
器具効率	100.0 %		
下方効率	99.9 %		
上方効率	0.1 %		
最大取付間隔			
A断面	0.60 H		
C断面			
B断面			

<p>Dash L DC</p>  <p>断面</p>	角度	光度
	0°	1651
	10°	1360
	20°	692
	30°	88
	40°	11
	50°	4
	60°	4
	70°	2
	80°	3
	90°	3
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	



照明率表		平均照度=台数 * 照明率 * 保守率 * 610 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.81	0.76	0.74	0.80	0.76	0.74	0.79	0.76	0.73	0.79	0.75	0.73	0.72
	0.70	0.89	0.85	0.82	0.88	0.84	0.81	0.87	0.83	0.81	0.86	0.83	0.80	0.79
	1.00	0.96	0.92	0.89	0.94	0.91	0.88	0.93	0.90	0.87	0.91	0.89	0.87	0.85
	1.25	1.00	0.96	0.93	0.98	0.94	0.92	0.96	0.93	0.91	0.94	0.92	0.90	0.88
	1.50	1.03	0.99	0.96	1.00	0.97	0.94	0.98	0.95	0.93	0.96	0.94	0.92	0.90
指	2.00	1.06	1.03	1.00	1.03	1.00	0.98	1.01	0.98	0.96	0.98	0.96	0.95	0.92
	2.50	1.08	1.05	1.03	1.05	1.03	1.01	1.02	1.00	0.98	0.99	0.98	0.96	0.94
	3.00	1.10	1.07	1.05	1.07	1.04	1.02	1.03	1.01	1.00	1.00	0.99	0.98	0.95
	4.00	1.12	1.10	1.08	1.08	1.07	1.05	1.05	1.03	1.02	1.01	1.00	0.99	0.96
	5.00	1.14	1.12	1.10	1.10	1.08	1.07	1.06	1.04	1.03	1.02	1.01	1.00	0.97
数	7.00	1.15	1.14	1.12	1.11	1.10	1.09	1.07	1.06	1.05	1.03	1.02	1.02	0.98
	10.00	1.17	1.16	1.15	1.12	1.11	1.10	1.08	1.07	1.06	1.04	1.03	1.03	0.99