
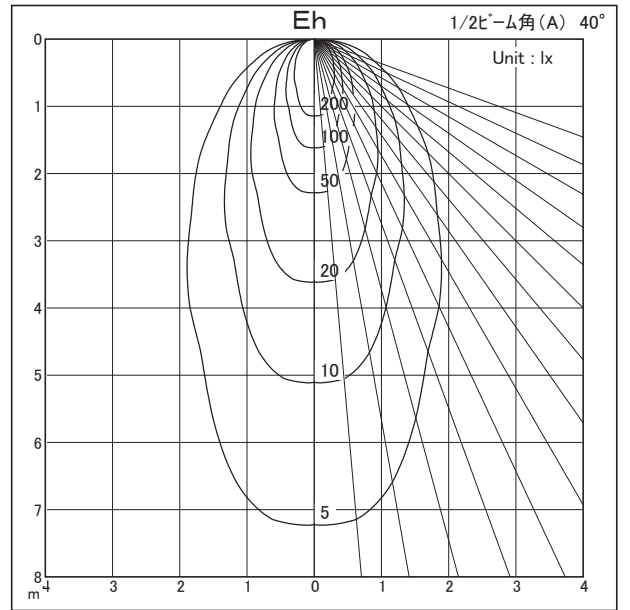
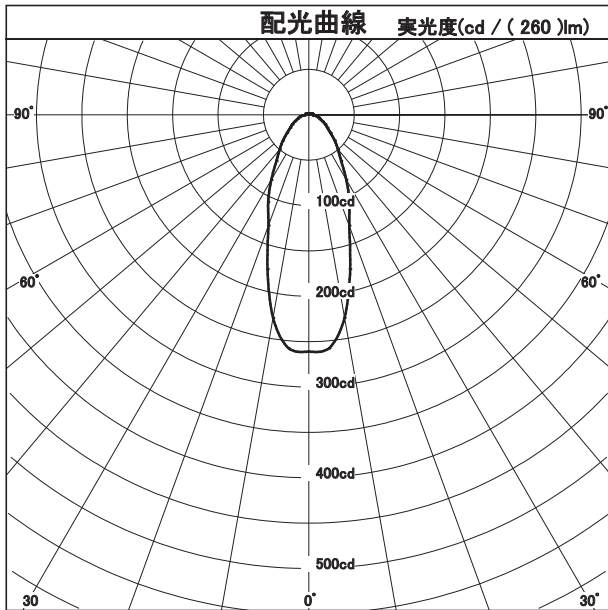




カタログ番号	J4103N		
使用ランプ	LED 4.2W		
ランプ光束	260.0	lm	1.000
器具効率	0.0 %		
下方効率	0.0 %		
上方効率	0.0 %		
最大取付間隔			
A断面	0.00 H		
C断面			
B断面			

EXTERIOR DOWNLIGHT 	角度	光度
	0°	261
	10°	227
	20°	130
	30°	83
	40°	50
	50°	31
	60°	21
	70°	13
	80°	8
	90°	4
	100°	4
	110°	3
	120°	2
	130°	1
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	



照明率表		平均照度=台数 * 照明率 * 保守率 * 260 (光束)/(間口 * 奥行)												
床面反射率(%)		20												
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.51	0.44	0.40	0.50	0.43	0.39	0.48	0.43	0.39	0.47	0.42	0.39	0.37
	0.70	0.62	0.55	0.50	0.60	0.54	0.49	0.59	0.53	0.49	0.57	0.52	0.48	0.46
	1.00	0.74	0.67	0.61	0.71	0.65	0.60	0.69	0.63	0.59	0.67	0.62	0.58	0.56
	1.25	0.80	0.73	0.68	0.77	0.71	0.67	0.74	0.69	0.65	0.72	0.68	0.64	0.61
	1.50	0.85	0.78	0.73	0.82	0.76	0.72	0.79	0.74	0.70	0.76	0.72	0.68	0.66
指	2.00	0.92	0.86	0.81	0.88	0.83	0.79	0.84	0.80	0.76	0.81	0.77	0.74	0.71
	2.50	0.96	0.91	0.86	0.92	0.87	0.83	0.88	0.84	0.81	0.84	0.81	0.78	0.75
	3.00	0.99	0.94	0.90	0.94	0.90	0.87	0.90	0.87	0.84	0.86	0.84	0.81	0.78
	4.00	1.03	0.99	0.96	0.98	0.95	0.92	0.94	0.91	0.89	0.89	0.87	0.85	0.82
数	5.00	1.06	1.02	0.99	1.01	0.98	0.95	0.96	0.94	0.91	0.91	0.90	0.88	0.84
	7.00	1.09	1.06	1.04	1.03	1.01	0.99	0.98	0.97	0.95	0.94	0.92	0.91	0.87
	10.00	1.11	1.09	1.08	1.06	1.04	1.03	1.00	0.99	0.98	0.96	0.95	0.94	0.89