



配光特性

図番 BE_50001



カタログ番号	J4103N
使用ランプ	LED 4.2W
ランプ光束	260.0 lm 1,000
器具効率	0.0 %
下方効率	0.0 %
上方効率	0.0 %
最大取付間隔	
A断面	0.00 H
C断面	
B断面	

EXTERIOR DOWNLIGHT  断面	角度	光度
	0°	261
	10°	227
	20°	130
	30°	83
	40°	50
	50°	31
	60°	21
	70°	13
	80°	8
	90°	4
	100°	4
	110°	3
	120°	2
	130°	1
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

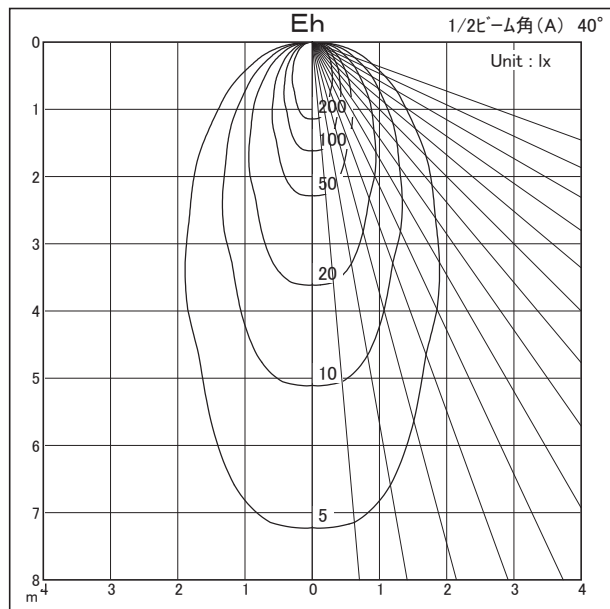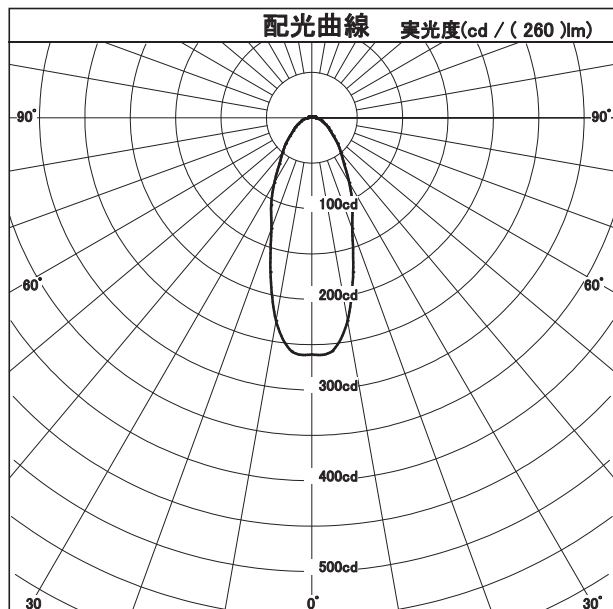

照 明 率 表		平均照度=台数×照明率×保守率× 260 (光束)/(間口×奥行)											
床面反射率(%)		20											
天井面反射率(%)		0											
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10
室 指 数	0.50	0.51	0.44	0.40	0.50	0.43	0.39	0.48	0.43	0.39	0.47	0.42	0.39
	0.70	0.62	0.55	0.50	0.60	0.54	0.49	0.59	0.53	0.49	0.57	0.52	0.48
	1.00	0.74	0.67	0.61	0.71	0.65	0.60	0.69	0.63	0.59	0.67	0.62	0.58
	1.25	0.80	0.73	0.68	0.77	0.71	0.67	0.74	0.69	0.65	0.72	0.68	0.64
	1.50	0.85	0.78	0.73	0.82	0.76	0.72	0.79	0.74	0.70	0.76	0.72	0.68
	2.00	0.92	0.86	0.81	0.88	0.83	0.79	0.84	0.80	0.76	0.81	0.77	0.74
	2.50	0.96	0.91	0.86	0.92	0.87	0.83	0.88	0.84	0.81	0.84	0.81	0.78
	3.00	0.99	0.94	0.90	0.94	0.90	0.87	0.90	0.87	0.84	0.86	0.84	0.81
	4.00	1.03	0.99	0.96	0.98	0.95	0.92	0.94	0.91	0.89	0.89	0.87	0.85
	5.00	1.06	1.02	0.99	1.01	0.98	0.95	0.96	0.94	0.91	0.91	0.90	0.88
数	7.00	1.09	1.06	1.04	1.03	1.01	0.99	0.98	0.97	0.95	0.94	0.92	0.91
	10.00	1.11	1.09	1.08	1.06	1.04	1.03	1.00	0.99	0.98	0.96	0.95	0.94