



配光特性

図番 YL230069



カタログ番号	J561CW
使用ランプ	
器具光束	5094.0 lm 1,000
下方効率	71.1 %
上方効率	0.0 %
最大取付間隔	
A 断面	0.97 H
C 断面	1.06 H
B 断面	1.18 H

角度	光度
0°	2006
10°	1922
20°	1633
30°	1188
40°	735
50°	444
60°	228
70°	130
80°	64
90°	6
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

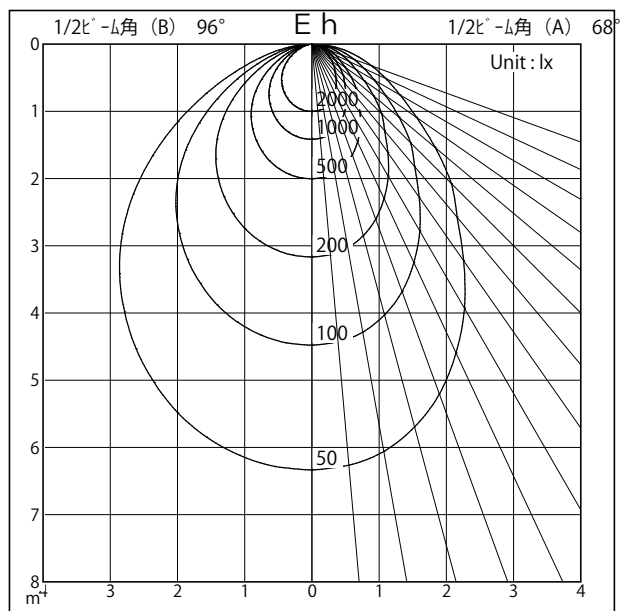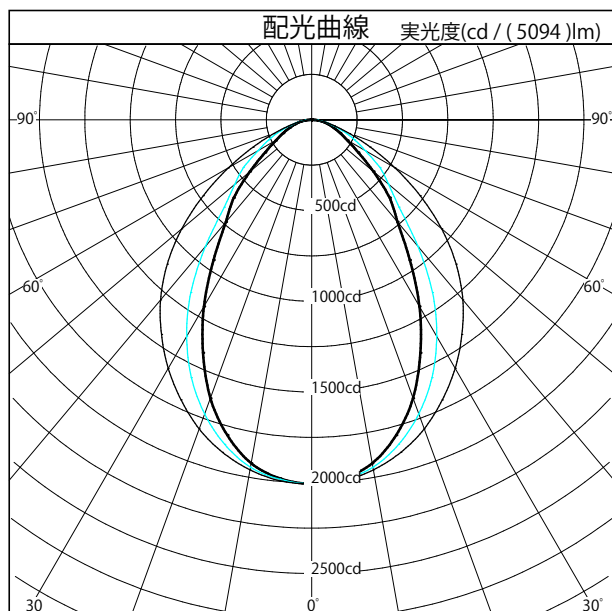

照 明 率 表		平均照度=台数×照明率×保守率× 5094 (光束)/(間口×奥行)												
床面反射率 (%)		20												0
天井面反射率 (%)		80												0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室 指 数	0.50	0.32	0.27	0.24	0.32	0.27	0.24	0.31	0.27	0.24	0.31	0.26	0.24	0.22
	0.70	0.42	0.36	0.32	0.41	0.36	0.32	0.40	0.35	0.32	0.39	0.35	0.32	0.30
	1.00	0.51	0.46	0.42	0.50	0.45	0.41	0.48	0.44	0.41	0.47	0.43	0.40	0.39
	1.25	0.56	0.51	0.47	0.55	0.50	0.47	0.53	0.49	0.46	0.52	0.48	0.45	0.44
	1.50	0.60	0.55	0.51	0.58	0.54	0.51	0.56	0.53	0.50	0.55	0.52	0.49	0.47
	2.00	0.65	0.61	0.58	0.63	0.59	0.56	0.61	0.58	0.55	0.59	0.56	0.54	0.52
	2.50	0.69	0.65	0.62	0.66	0.63	0.60	0.64	0.61	0.59	0.62	0.60	0.58	0.56
	3.00	0.71	0.67	0.64	0.68	0.65	0.63	0.66	0.63	0.61	0.63	0.62	0.60	0.58
	4.00	0.74	0.71	0.69	0.71	0.69	0.67	0.69	0.67	0.65	0.66	0.65	0.63	0.61
	5.00	0.76	0.74	0.71	0.73	0.71	0.69	0.70	0.69	0.67	0.68	0.66	0.65	0.63
数	7.00	0.78	0.77	0.75	0.75	0.74	0.72	0.72	0.71	0.70	0.69	0.68	0.67	0.65
	10.00	0.80	0.79	0.78	0.77	0.76	0.75	0.74	0.73	0.72	0.71	0.70	0.69	0.67