

# 配光特性



図番 WO-7500



カタログ番号	871DL02D		
オプション番号	4000K		
使用ランプ	COB57W		
ランプ光束	5350.0	lm	1,000
器具効率	100.0 %		
下方効率	100.0 %		
上方効率	0.0 %		
最大取付間隔			
A断面	2.40 H		
C断面	1.73 H		
B断面	1.27 H		

角度	光度
0°	1772
10°	1778
20°	1817
30°	2169
40°	2876
50°	3415
60°	1302
70°	11
80°	2
90°	1
100°	0
110°	2
120°	8
130°	10
140°	11
150°	5
160°	7
170°	24
180°	26

CU BEAM DOWN

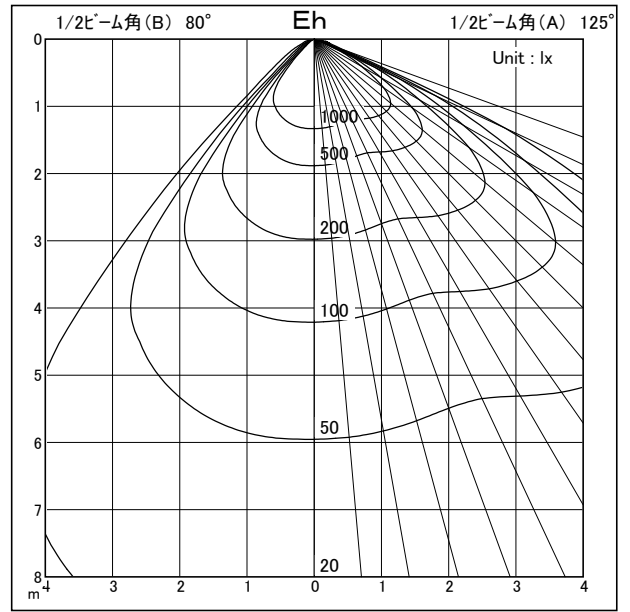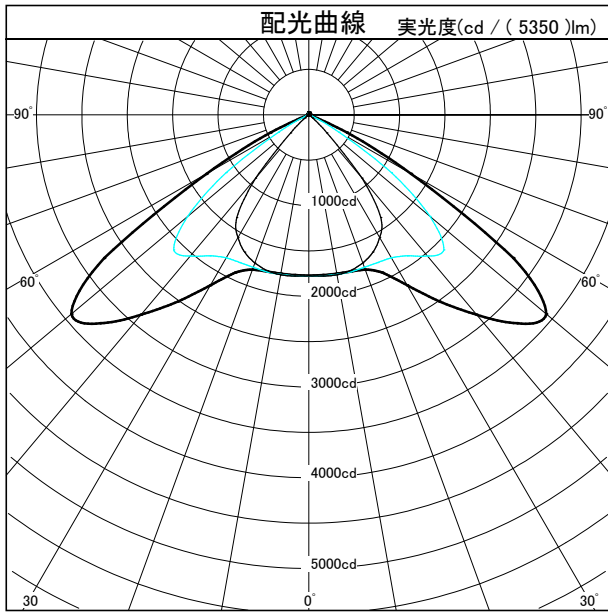

照明率表		平均照度=台数*照明率*保守率*5350(光束)/(間口*奥行)											
床面反射率(%)		20											
天井面反射率(%)		80			60			40			20		
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10
室	0.50	0.40	0.32	0.27	0.39	0.32	0.27	0.38	0.31	0.27	0.37	0.31	0.26
	0.70	0.55	0.47	0.41	0.54	0.46	0.41	0.52	0.46	0.40	0.51	0.45	0.40
	1.00	0.72	0.64	0.58	0.70	0.62	0.57	0.68	0.61	0.57	0.66	0.60	0.56
	1.25	0.80	0.73	0.67	0.78	0.71	0.66	0.75	0.70	0.65	0.73	0.68	0.64
	1.50	0.86	0.79	0.74	0.84	0.78	0.73	0.81	0.76	0.72	0.78	0.74	0.70
指	2.00	0.94	0.88	0.83	0.91	0.86	0.82	0.88	0.84	0.80	0.85	0.82	0.78
	2.50	0.99	0.94	0.89	0.96	0.91	0.87	0.92	0.89	0.85	0.89	0.86	0.83
	3.00	1.03	0.98	0.94	0.99	0.95	0.91	0.95	0.92	0.89	0.92	0.89	0.87
	4.00	1.07	1.03	1.00	1.03	1.00	0.97	0.99	0.96	0.94	0.95	0.93	0.91
	5.00	1.10	1.07	1.04	1.05	1.03	1.00	1.01	0.99	0.97	0.98	0.96	0.94
数	7.00	1.13	1.11	1.08	1.08	1.06	1.04	1.04	1.02	1.01	1.00	0.99	0.97
	10.00	1.16	1.14	1.12	1.11	1.09	1.08	1.06	1.05	1.04	1.02	1.01	1.00