



配光特性

図番

カタログ番号	708RM03/9631/40		
使用ランプ	LED11W		
ランプ光束	843.0	lm	1,000
最大光度	5105.1 cd		
1／2ビーム角			
A断面	24.00 °		
C断面	25.00 °		
B断面	23.00 °		

 yamagiwa

	角度	光度
FLOS	0°	5105
	10°	3354
	20°	243
	30°	16
	40°	7
	50°	5
	60°	3
	70°	1
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

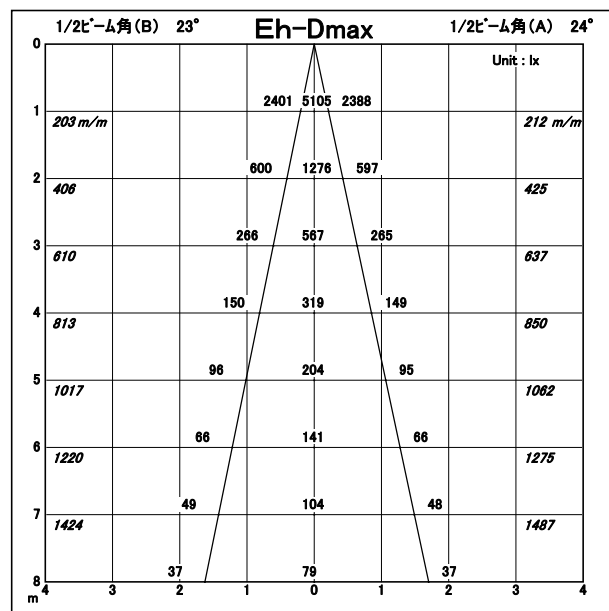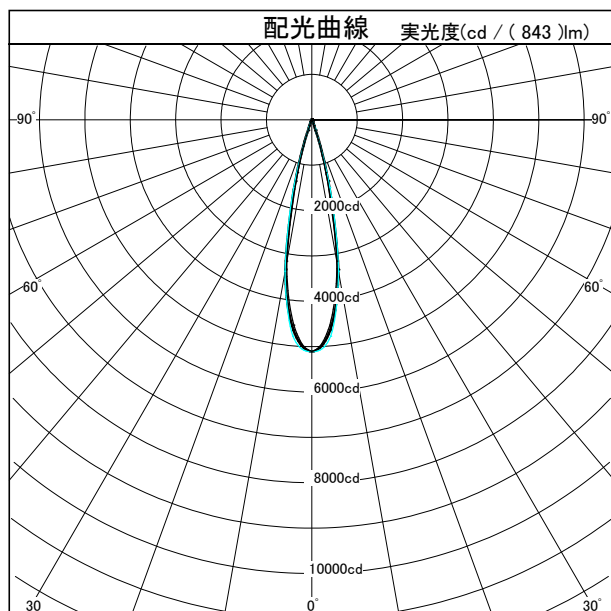

照 明 率 表		平均照度=台数 * 照明率 * 保守率 * 843 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.96	0.93	0.91	0.95	0.93	0.91	0.95	0.92	0.91	0.94	0.92	0.91	0.90
	0.70	0.99	0.97	0.95	0.99	0.96	0.94	0.98	0.95	0.94	0.97	0.95	0.93	0.92
	1.00	1.03	1.00	0.98	1.02	0.99	0.97	1.00	0.98	0.97	0.99	0.97	0.96	0.95
	1.25	1.05	1.03	1.00	1.03	1.01	0.99	1.02	1.00	0.98	1.00	0.98	0.97	0.96
	1.50	1.07	1.04	1.02	1.05	1.02	1.01	1.03	1.01	0.99	1.01	0.99	0.98	0.96
指	2.00	1.09	1.07	1.05	1.06	1.04	1.03	1.04	1.02	1.01	1.02	1.00	0.99	0.97
	2.50	1.11	1.09	1.07	1.08	1.06	1.04	1.05	1.03	1.02	1.02	1.01	1.00	0.98
	3.00	1.12	1.10	1.08	1.08	1.07	1.05	1.05	1.04	1.03	1.02	1.01	1.01	0.98
	4.00	1.13	1.12	1.10	1.10	1.08	1.07	1.06	1.05	1.04	1.03	1.02	1.01	0.99
	5.00	1.14	1.13	1.12	1.10	1.09	1.08	1.07	1.06	1.05	1.03	1.02	1.02	0.99
数	7.00	1.16	1.14	1.13	1.11	1.10	1.10	1.07	1.06	1.06	1.03	1.03	1.02	0.99
	10.00	1.17	1.16	1.15	1.12	1.11	1.11	1.08	1.07	1.07	1.04	1.03	1.03	0.99

TL LABORATORY INC.