

配光特性

図番 6274_14A



カタログ番号	708RM03/6274/40A		
使用ランプ	LED18W		
ランプ光束	1085.0	lm	1.000
最大光度	11631.2 cd		
1／2ビーム角			
A断面	16.00 °		
C断面			
B断面			



FLOS	角度	光度
	0°	11631
	10°	3377
	20°	284
	30°	64
	40°	35
	50°	17
	60°	3
	70°	2
	80°	1
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0



断面

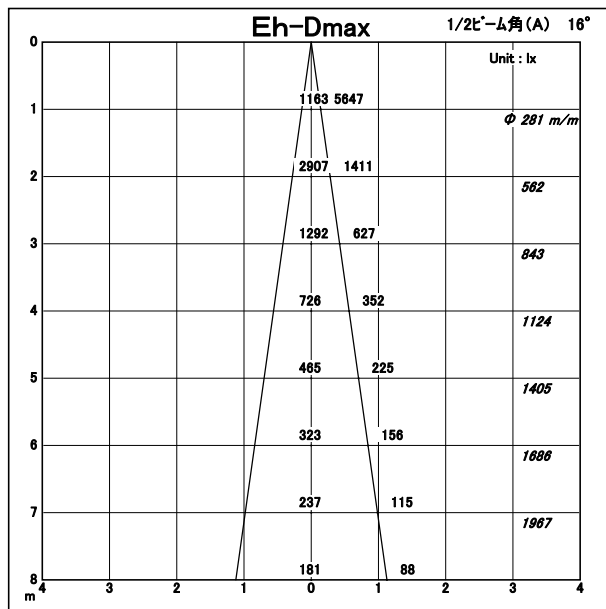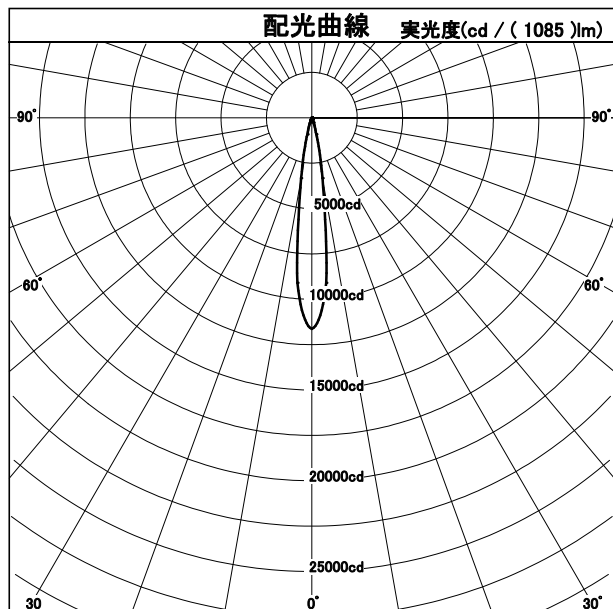

照 明 率 表		平均照度=台数 * 照明率 * 保守率 * 1085 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.96	0.94	0.92	0.96	0.93	0.92	0.95	0.93	0.91	0.95	0.93	0.91	0.90
	0.70	1.01	0.97	0.95	1.00	0.97	0.95	0.99	0.96	0.95	0.98	0.96	0.94	0.93
	1.00	1.05	1.01	0.99	1.03	1.00	0.98	1.02	0.99	0.98	1.00	0.98	0.97	0.96
	1.25	1.07	1.04	1.02	1.05	1.02	1.00	1.03	1.01	0.99	1.01	1.00	0.98	0.97
	1.50	1.09	1.06	1.03	1.06	1.04	1.02	1.04	1.02	1.01	1.02	1.01	0.99	0.98
指	2.00	1.11	1.08	1.06	1.08	1.06	1.04	1.06	1.04	1.02	1.03	1.02	1.01	0.99
	2.50	1.13	1.10	1.08	1.09	1.08	1.06	1.06	1.05	1.04	1.04	1.03	1.02	0.99
	3.00	1.14	1.12	1.10	1.10	1.09	1.07	1.07	1.06	1.05	1.04	1.03	1.02	1.00
	4.00	1.16	1.14	1.12	1.12	1.10	1.09	1.08	1.07	1.06	1.05	1.04	1.03	1.00
	5.00	1.17	1.15	1.14	1.12	1.11	1.10	1.09	1.08	1.07	1.05	1.04	1.04	1.01
数	7.00	1.18	1.17	1.15	1.13	1.12	1.12	1.09	1.08	1.08	1.05	1.05	1.04	1.01
	10.00	1.19	1.18	1.17	1.14	1.13	1.13	1.10	1.09	1.09	1.06	1.05	1.05	1.01