

# 配光特性

図番 6275\_14A



|         |                  |    |       |
|---------|------------------|----|-------|
| カタログ番号  | 708RM03/6275/40A |    |       |
|         |                  |    |       |
| 使用ランプ   | LED16W           |    |       |
| ランプ光束   | 1129.0           | lm | 1.000 |
|         |                  |    |       |
| 最大光度    | 6093.3 cd        |    |       |
|         |                  |    |       |
| 1／2ビーム角 |                  |    |       |
| A断面     | 23.00 °          |    |       |
| C断面     |                  |    |       |
| B断面     |                  |    |       |



| FLOS | 角度   | 光度   |
|------|------|------|
|      | 0°   | 6093 |
|      | 10°  | 3515 |
|      | 20°  | 652  |
|      | 30°  | 93   |
|      | 40°  | 43   |
|      | 50°  | 19   |
|      | 60°  | 4    |
|      | 70°  | 2    |
|      | 80°  | 1    |
|      | 90°  | 0    |
|      | 100° | 0    |
|      | 110° | 0    |
|      | 120° | 0    |
|      | 130° | 0    |
|      | 140° | 0    |
|      | 150° | 0    |
|      | 160° | 0    |
|      | 170° | 0    |
|      | 180° | 0    |



断面

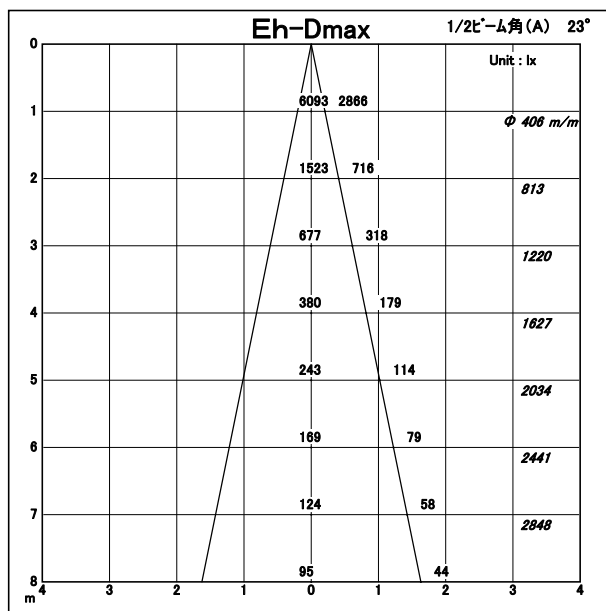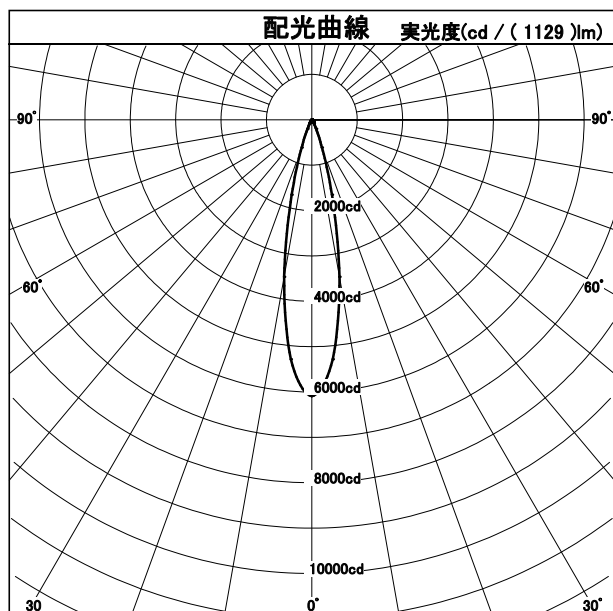

| 照 明 率 表   |       | 平均照度=台数 * 照明率 * 保守率 * 1129 (光束)/(間口 * 奥行) |      |      |      |      |      |      |      |      |      |      |      |      |
|-----------|-------|-------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| 床面反射率(%)  |       | 20                                        |      |      |      |      |      |      |      |      |      |      |      | 0    |
| 天井面反射率(%) |       | 80                                        |      |      | 60   |      |      | 40   |      |      | 20   |      |      | 0    |
| 壁面反射率(%)  |       | 50                                        | 30   | 10   | 50   | 30   | 10   | 50   | 30   | 10   | 50   | 30   | 10   | 0    |
| 室         | 0.50  | 0.88                                      | 0.85 | 0.83 | 0.88 | 0.85 | 0.82 | 0.87 | 0.84 | 0.82 | 0.86 | 0.84 | 0.82 | 0.81 |
|           | 0.70  | 0.94                                      | 0.91 | 0.88 | 0.93 | 0.90 | 0.88 | 0.92 | 0.89 | 0.87 | 0.91 | 0.89 | 0.87 | 0.86 |
|           | 1.00  | 1.00                                      | 0.96 | 0.93 | 0.98 | 0.95 | 0.93 | 0.96 | 0.94 | 0.92 | 0.95 | 0.93 | 0.91 | 0.90 |
|           | 1.25  | 1.02                                      | 0.99 | 0.96 | 1.00 | 0.98 | 0.95 | 0.99 | 0.96 | 0.94 | 0.97 | 0.95 | 0.93 | 0.92 |
|           | 1.50  | 1.05                                      | 1.01 | 0.99 | 1.02 | 1.00 | 0.97 | 1.00 | 0.98 | 0.96 | 0.98 | 0.96 | 0.95 | 0.93 |
| 指         | 2.00  | 1.07                                      | 1.05 | 1.02 | 1.05 | 1.02 | 1.00 | 1.02 | 1.00 | 0.99 | 1.00 | 0.98 | 0.97 | 0.95 |
|           | 2.50  | 1.09                                      | 1.07 | 1.05 | 1.06 | 1.04 | 1.02 | 1.03 | 1.02 | 1.00 | 1.00 | 0.99 | 0.98 | 0.96 |
|           | 3.00  | 1.11                                      | 1.08 | 1.06 | 1.07 | 1.05 | 1.04 | 1.04 | 1.03 | 1.01 | 1.01 | 1.00 | 0.99 | 0.96 |
|           | 4.00  | 1.13                                      | 1.11 | 1.09 | 1.09 | 1.07 | 1.06 | 1.05 | 1.04 | 1.03 | 1.02 | 1.01 | 1.00 | 0.97 |
|           | 5.00  | 1.14                                      | 1.12 | 1.11 | 1.10 | 1.08 | 1.07 | 1.06 | 1.05 | 1.04 | 1.02 | 1.02 | 1.01 | 0.98 |
| 数         | 7.00  | 1.15                                      | 1.14 | 1.13 | 1.11 | 1.10 | 1.09 | 1.07 | 1.06 | 1.05 | 1.03 | 1.02 | 1.02 | 0.98 |
|           | 10.00 | 1.16                                      | 1.15 | 1.14 | 1.12 | 1.11 | 1.10 | 1.07 | 1.07 | 1.06 | 1.03 | 1.03 | 1.02 | 0.99 |