



# 配光特性

図番 6273\_14C

|         |                  |    |       |
|---------|------------------|----|-------|
| カタログ番号  | 708RM03/6273/06C |    |       |
| 使用ランプ   | LED8W            |    |       |
| ランプ光束   | 365.0            | lm | 1.000 |
| 最大光度    | 4891.7 cd        |    |       |
| 1／2ビーム角 |                  |    |       |
| A断面     | 14.00 °          |    |       |
| C断面     |                  |    |       |
| B断面     |                  |    |       |



| FLOS                                                                                | 角度   | 光度   |
|-------------------------------------------------------------------------------------|------|------|
|                                                                                     | 0°   | 4892 |
|  | 10°  | 1297 |
|                                                                                     | 20°  | 57   |
|                                                                                     | 30°  | 6    |
|                                                                                     | 40°  | 2    |
|                                                                                     | 50°  | 1    |
|                                                                                     | 60°  | 0    |
|                                                                                     | 70°  | 0    |
|                                                                                     | 80°  | 0    |
|                                                                                     | 90°  | 0    |
|                                                                                     | 100° | 0    |
|                                                                                     | 110° | 0    |
|                                                                                     | 120° | 0    |
|                                                                                     | 130° | 0    |
|                                                                                     | 140° | 0    |
|                                                                                     | 150° | 0    |
|                                                                                     | 160° | 0    |
|                                                                                     | 170° | 0    |
|                                                                                     | 180° | 0    |

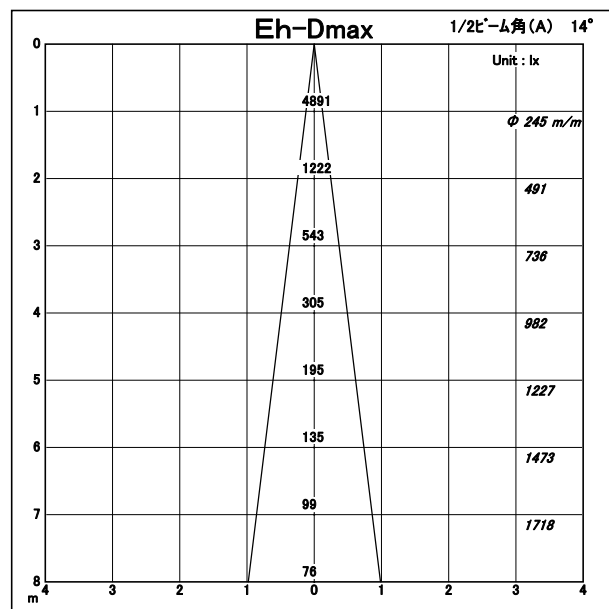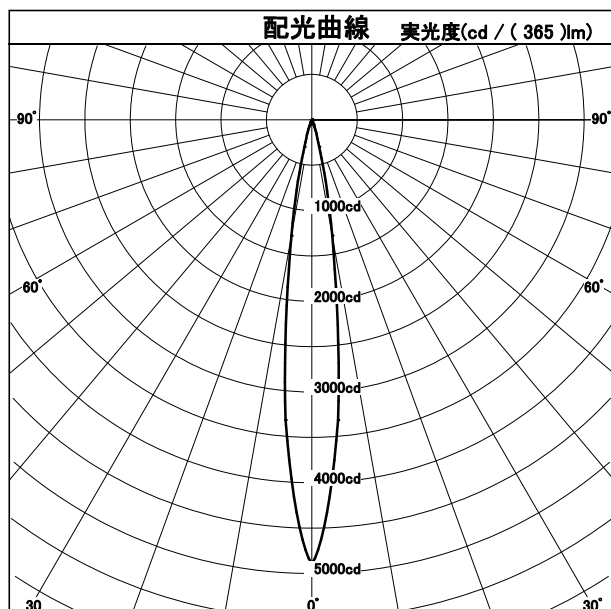

| 照 明 率 表   |       | 平均照度=台数 * 照明率 * 保守率 * 365 (光束)/(間口 * 奥行) |      |      |      |      |      |      |      |      |      |      |      |      |
|-----------|-------|------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| 床面反射率(%)  |       | 20                                       |      |      |      |      |      |      |      |      |      |      |      | 0    |
| 天井面反射率(%) |       | 80                                       |      |      | 60   |      |      | 40   |      |      | 20   |      |      | 0    |
| 壁面反射率(%)  |       | 50                                       | 30   | 10   | 50   | 30   | 10   | 50   | 30   | 10   | 50   | 30   | 10   | 0    |
| 室         | 0.50  | 1.02                                     | 0.99 | 0.98 | 1.01 | 0.99 | 0.97 | 1.00 | 0.99 | 0.97 | 1.00 | 0.98 | 0.97 | 0.96 |
|           | 0.70  | 1.04                                     | 1.02 | 1.00 | 1.03 | 1.01 | 1.00 | 1.03 | 1.01 | 0.99 | 1.02 | 1.00 | 0.99 | 0.98 |
|           | 1.00  | 1.07                                     | 1.05 | 1.03 | 1.06 | 1.04 | 1.02 | 1.04 | 1.03 | 1.01 | 1.03 | 1.01 | 1.00 | 0.99 |
|           | 1.25  | 1.09                                     | 1.06 | 1.04 | 1.07 | 1.05 | 1.03 | 1.05 | 1.04 | 1.02 | 1.04 | 1.02 | 1.01 | 1.00 |
|           | 1.50  | 1.10                                     | 1.08 | 1.06 | 1.08 | 1.06 | 1.04 | 1.06 | 1.04 | 1.03 | 1.04 | 1.03 | 1.02 | 1.00 |
| 指         | 2.00  | 1.12                                     | 1.10 | 1.08 | 1.10 | 1.08 | 1.06 | 1.07 | 1.06 | 1.04 | 1.05 | 1.04 | 1.03 | 1.00 |
|           | 2.50  | 1.14                                     | 1.12 | 1.10 | 1.11 | 1.09 | 1.08 | 1.08 | 1.06 | 1.05 | 1.05 | 1.04 | 1.03 | 1.01 |
|           | 3.00  | 1.15                                     | 1.13 | 1.11 | 1.11 | 1.10 | 1.08 | 1.08 | 1.07 | 1.06 | 1.05 | 1.04 | 1.04 | 1.01 |
|           | 4.00  | 1.16                                     | 1.15 | 1.13 | 1.12 | 1.11 | 1.10 | 1.09 | 1.08 | 1.07 | 1.05 | 1.05 | 1.04 | 1.01 |
|           | 5.00  | 1.17                                     | 1.16 | 1.14 | 1.13 | 1.12 | 1.11 | 1.09 | 1.08 | 1.08 | 1.06 | 1.05 | 1.04 | 1.01 |
| 数         | 7.00  | 1.18                                     | 1.17 | 1.16 | 1.14 | 1.13 | 1.12 | 1.10 | 1.09 | 1.08 | 1.06 | 1.05 | 1.05 | 1.02 |
|           | 10.00 | 1.19                                     | 1.18 | 1.17 | 1.14 | 1.14 | 1.13 | 1.10 | 1.09 | 1.09 | 1.06 | 1.06 | 1.05 | 1.02 |