

配光特性

図番 8009_14





カタログ番号	708TM03/8009/14
使用ランプ	LED30W
ランプ光束	1012.0 lm 1.000
最大光度	360.9 cd
1／2ビーム角	
A断面	110.00 °
C断面	
B断面	

FLOS

A 3D perspective rendering of the FLOS Linear Light fixture. It is a long, slim, rectangular light fixture with a dark, possibly black, adjustable arm extending from one end. The main body of the fixture is a light, neutral color. The arm is shown at an angle, demonstrating its flexibility.

断面

角度	光度
0°	361
10°	355
20°	334
30°	300
40°	257
50°	207
60°	152
70°	96
80°	43
90°	1
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

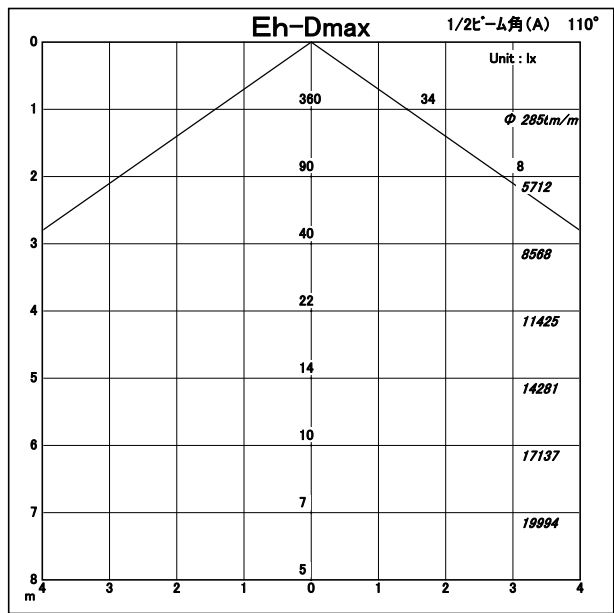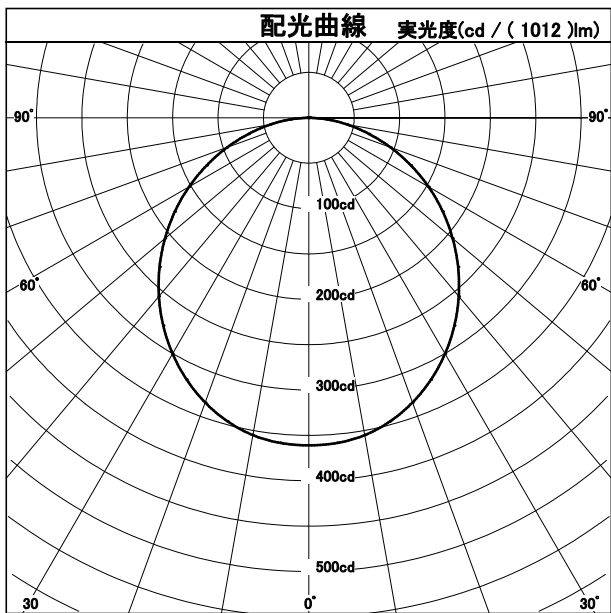

照 明 率 表		平均照度=台数*照明率*保守率* 1012(光束)/(間口*奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.38	0.30	0.25	0.37	0.30	0.25	0.36	0.29	0.25	0.35	0.29	0.25	0.23
	0.70	0.51	0.42	0.36	0.49	0.41	0.35	0.48	0.40	0.35	0.46	0.40	0.35	0.33
	1.00	0.64	0.55	0.49	0.62	0.54	0.48	0.60	0.53	0.48	0.58	0.52	0.47	0.45
	1.25	0.72	0.64	0.57	0.70	0.62	0.56	0.67	0.61	0.55	0.65	0.59	0.55	0.52
指	1.50	0.78	0.70	0.64	0.75	0.68	0.63	0.72	0.66	0.62	0.70	0.65	0.61	0.58
	2.00	0.86	0.79	0.73	0.83	0.77	0.72	0.80	0.75	0.70	0.77	0.73	0.69	0.66
	2.50	0.92	0.85	0.80	0.88	0.83	0.78	0.85	0.80	0.76	0.82	0.78	0.75	0.72
	3.00	0.96	0.90	0.85	0.92	0.87	0.83	0.88	0.84	0.80	0.85	0.81	0.78	0.75
数	4.00	1.01	0.96	0.92	0.97	0.93	0.89	0.93	0.90	0.87	0.89	0.87	0.84	0.81
	5.00	1.04	1.00	0.96	1.00	0.97	0.93	0.96	0.93	0.90	0.92	0.90	0.88	0.84
	7.00	1.08	1.05	1.02	1.04	1.01	0.99	0.99	0.97	0.95	0.95	0.94	0.92	0.88
	10.00	1.11	1.09	1.07	1.07	1.05	1.03	1.02	1.00	0.99	0.98	0.97	0.95	0.92

TL LABORATORY INC.