




配光特性

図番 1909

カタログ番号	708IS03/8105/40		
使用ランプ	LED23W		
ランプ光束	1515.0	lm	1,000
最大光度	371.5	cd	
1/2ビーム角			
A断面	106.00 °		
C断面	127.00 °		
B断面	150.00 °		



FLOS	角度	光度
	0°	372
	10°	363
	20°	339
	30°	303
	40°	255
	50°	202
	60°	146
	70°	89
	80°	38
	90°	4
	100°	1
	110°	1
	120°	2
	130°	2
	140°	3
	150°	3
	160°	3
	170°	3
	180°	3

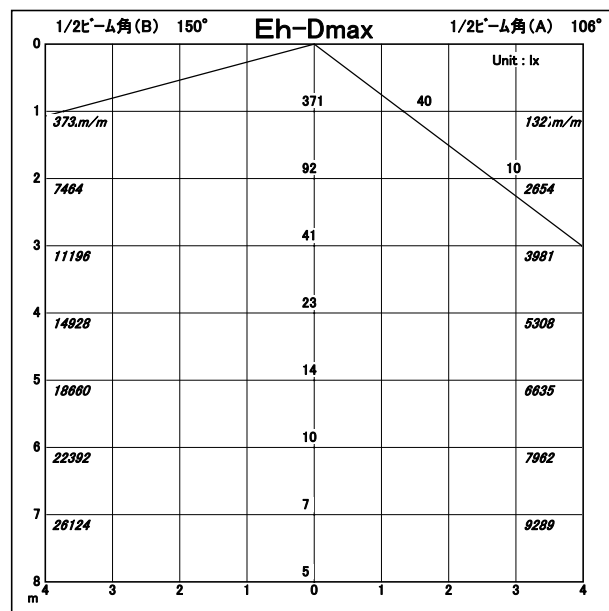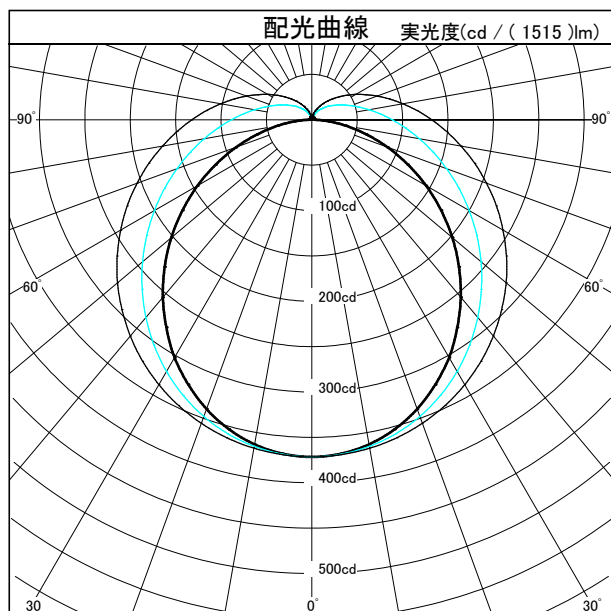

照 明 率 表		平均照度=台数 * 照明率 * 保守率 * 1515 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80												0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室 指 数	0.50	0.34	0.26	0.20	0.32	0.25	0.20	0.30	0.24	0.19	0.28	0.22	0.18	0.16
	0.70	0.45	0.36	0.30	0.42	0.34	0.29	0.39	0.33	0.27	0.37	0.31	0.26	0.23
	1.00	0.57	0.48	0.41	0.54	0.46	0.40	0.50	0.43	0.38	0.47	0.41	0.36	0.33
	1.25	0.65	0.56	0.49	0.60	0.53	0.47	0.56	0.50	0.44	0.52	0.47	0.42	0.39
	1.50	0.71	0.62	0.55	0.66	0.58	0.52	0.61	0.55	0.50	0.57	0.52	0.47	0.43
	2.00	0.79	0.71	0.64	0.73	0.66	0.61	0.68	0.62	0.58	0.63	0.58	0.55	0.50
	2.50	0.84	0.77	0.71	0.78	0.72	0.67	0.73	0.68	0.63	0.67	0.63	0.60	0.55
	3.00	0.88	0.81	0.76	0.82	0.76	0.71	0.76	0.71	0.67	0.70	0.67	0.63	0.58
	4.00	0.94	0.88	0.83	0.87	0.82	0.78	0.81	0.77	0.73	0.75	0.72	0.69	0.64
	5.00	0.98	0.92	0.88	0.90	0.86	0.82	0.84	0.80	0.77	0.78	0.75	0.72	0.67
数	7.00	1.02	0.98	0.94	0.94	0.91	0.88	0.87	0.85	0.82	0.81	0.79	0.77	0.71
	10.00	1.06	1.02	0.99	0.98	0.95	0.93	0.91	0.88	0.87	0.84	0.82	0.81	0.75